

Xuanfeng TONG, Zhi Hao JIANG, Yuan LI, Fan WU, Lin PENG, Taiwei YUE, Wei HONG, 2024. A low-profile dual-broadband dual-circularly-polarized reflectarray for K-/Ka-band space applications. *Frontiers of Information Technology & Electronic Engineering*, 25(8):1145-1161.  
<https://doi.org/10.1631/FITEE.2300214>

# A low-profile dual-broadband dual-circularly-polarized reflectarray for K-/Ka-band space applications

**Key words:** Broadband; Dual-band; Dual-circularly-polarized; Reflectarray; Shared-aperture

Corresponding author: Zhi Hao JIANG

E-mail: [zhihao.jiang@seu.edu.cn](mailto:zhihao.jiang@seu.edu.cn)

 ORCID: <https://orcid.org/0000-0002-4275-1203>

# Motivation

1. Due to the fast-growing demands of commercial wireless communications for a higher speed of data transmission and a better coverage of the Earth's surface, existing ground-based communication infrastructures can no longer satisfy future needs. To this end, radiating apertures that can provide dual-band dual-circularly-polarized (CP) beamforming are highly desirable, and can be realized by using antenna arrays and reflectarrays/transmitarrays (RAs/TAs).
2. Recently, advanced RAs with simultaneous dual-band and dual-CP characteristics are becoming increasingly attractive. Although these existing designs can provide dual-band dual-CP beamforming, their operational bands are too narrow to be useful in practical applications.

# Main idea

1. Dual-band operation is achieved by incorporating multi-layered phase shifting elements individually operating in the K- and Ka-band, which are then interleaved in a shared aperture, resulting in a panel thickness of only about  $0.1\lambda_L$ .
2. Dual-CP phase modulation is obtained by rotating the designed K- and Ka-band elements around their own geometrical centers.
3. To truly achieve dual-band dual-CP radiation, two planar dual-CP feed radiators, operating at K- and Ka-band, separately, are used, which can reduce the overall profile of the final antenna module.

# Dual-band dual-CP cell design

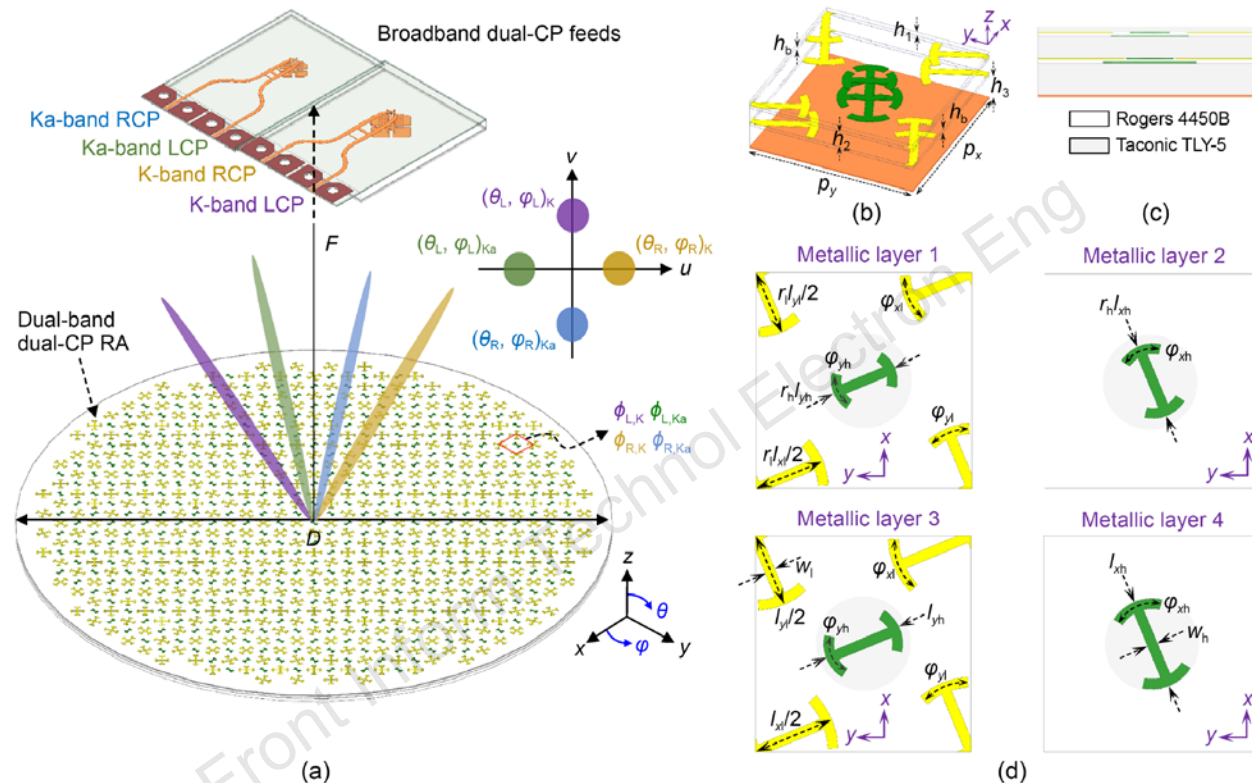


Fig. 1 (a) Configuration of the dual-band dual-CP RA antenna generating K- and Ka-band RCP and LCP beams pointing at different angles when excited by K- and Ka-band dual-CP planar feeds; (b) 3D view of the dual-band dual-CP RA cell; (c) side view of the dual-band dual-CP RA cell; (d) planar views of the metallic layers. The geometrical dimensions are  $p_x=5$  mm,  $p_y=5$  mm,  $h_1=0.13$  mm,  $h_2=0.51$  mm,  $h_3=0.76$  mm,  $h_b=0.1$  mm,  $\varphi_{x1}=20^\circ$ ,  $\varphi_{xh}=35^\circ$ ,  $\varphi_{y1}=20^\circ$ ,  $\varphi_{yh}=35^\circ$ ,  $w_1=0.25$  mm,  $w_h=0.25$  mm. References to color refer to the online version of this figure

- The K-band element contains two cascaded connected crossed-dipoles printed on the bottom sides of the first and second TLY-5 substrate layers.
- The Ka-band element contains crossed-dipoles that are not interconnected to avoid in-band spurious resonant modes that could occur at oblique incidence.

# Dual-band dual-CP cell design

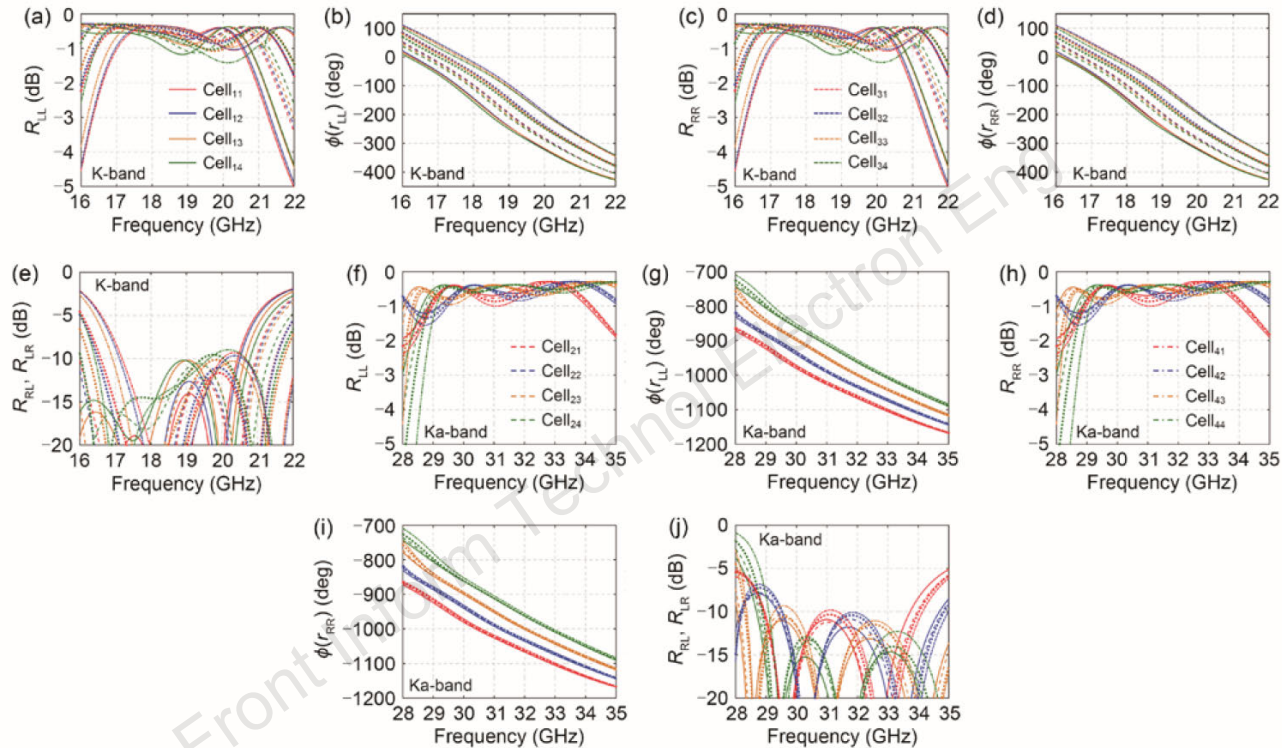
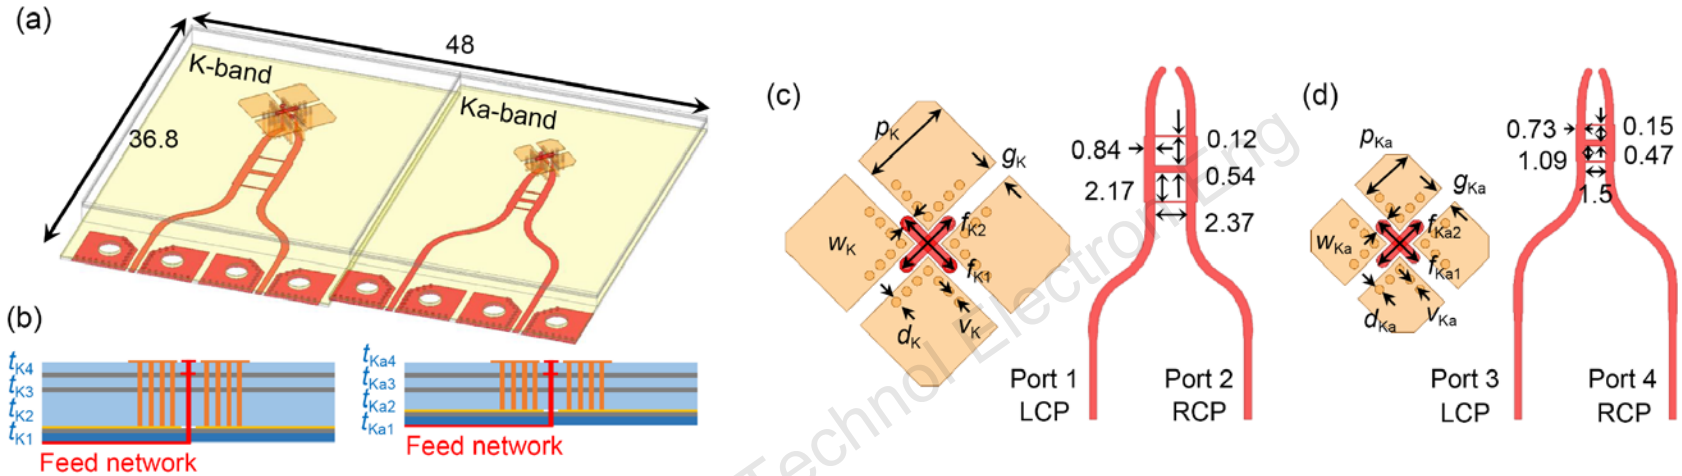


Fig. 6 Simulated co-polarized CP reflection magnitudes  $R_{LL}$  (a) and  $R_{RR}$  (c), simulated co-polarized CP reflection phases  $\phi(r_{LL})$  (b) and  $\phi(r_{RR})$  (d), and simulated cross-polarized CP reflection magnitudes  $R_{RL}$  and  $R_{LR}$  (e) of Cell<sub>*mn*</sub> with  $m=1, 2, 3, 4$ , i.e.,  $l_{xl}=3.9, 3.8, 3.7, 3.6$  mm, and  $n=1, 2, 3, 4$ , i.e.,  $l_{yh}=2.27, 2.21, 2.15, 2.09$  mm at K-band; simulated co-polarized CP reflection magnitudes  $R_{LL}$  (f) and  $R_{RR}$  (h), simulated co-polarized CP reflection phases  $\phi(r_{LL})$  (g) and  $\phi(r_{RR})$  (i), and simulated cross-polarized CP reflection magnitudes  $R_{RL}$  and  $R_{LR}$  (j) of Cell<sub>*mn*</sub> with  $m=1, 2, 3, 4$ , i.e.,  $l_{xl}=3.9, 3.8, 3.7, 3.6$  mm, and  $n=1, 2, 3, 4$ , i.e.,  $l_{yh}=2.27, 2.21, 2.15, 2.09$  mm at Ka-band. References to color refer to the online version of this figure

- At the bands of 17–21 GHz and 29–34 GHz, the co-polarized CP reflection magnitudes, i.e.,  $R_{LL}$  and  $R_{RR}$ , are higher than  $-1$  dB for most of the cell designs, and the cross-polarized CP reflection magnitudes, i.e.,  $R_{LR}$  and  $R_{RL}$ , are below  $-10$  dB.

# Planar feed source design

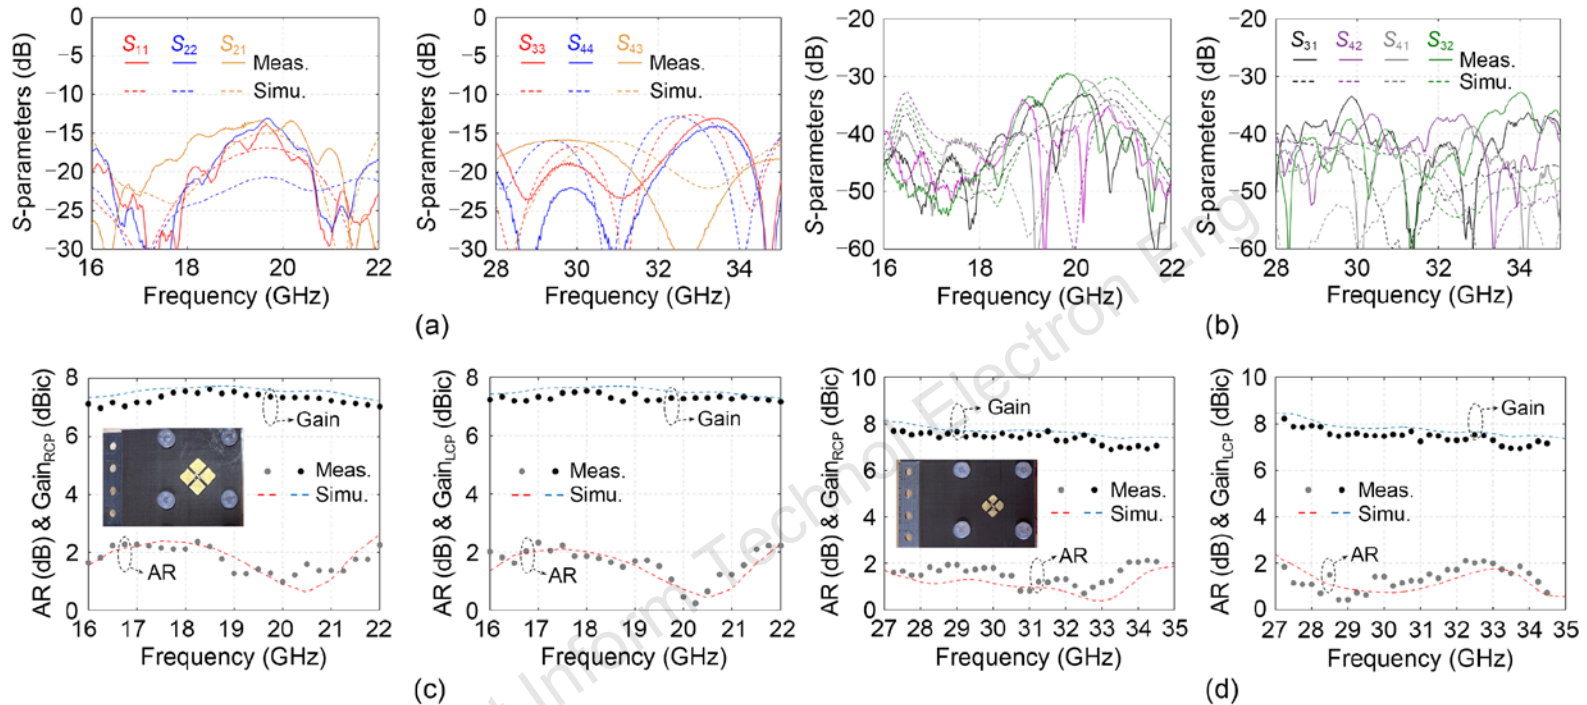


**Fig. 9 Configuration (a) and side views (b) of the broadband dual-CP planar feeds operating at K- and Ka-band; planar views of the K-band (c) and Ka-band (d) magnetoelectric dipoles and broadband microstrip hybrid couplers. The geometrical dimensions are  $t_{K1}=0.203$ ,  $t_{K2}=1.52$ ,  $t_{K3}=0.13$ ,  $t_{K4}=0.25$ ,  $p_K=3.04$ ,  $g_K=0.6$ ,  $v_K=0.17$ ,  $d_K=0.3$ ,  $f_{K1}=2.34$ ,  $f_{K2}=2.31$ ,  $w_K=0.4$ ,  $t_{Ka1}=0.203$ ,  $t_{Ka2}=0.76$ ,  $t_{Ka3}=0.13$ ,  $t_{Ka4}=0.25$ ,  $p_{Ka}=1.87$ ,  $g_{Ka}=0.60$ ,  $v_{Ka}=0.17$ ,  $d_{Ka}=0.28$ ,  $f_{Ka1}=1.79$ ,  $f_{Ka2}=1.94$ , and  $w_{Ka}=0.38$ , all in millimeters**

- The planar dual-CP feed is formed by a dual-polarized magneto-electric dipole fed by two orthogonal L-shaped probes and a second-order hybrid coupler.
- Two planar dual-CP feeds, one operating at the K-band and the other at the Ka-band, are employed, both having two input ports for exciting LCP- and RCP-radiated waves over a wide band.




# Planar feed source design




**Fig. 10** (a) Simulated and measured port reflection magnitudes and mutual coupling between co-band cross-polarized ports of the dual-CP feeds at K- and Ka-band; (b) simulated and measured mutual coupling between cross-band ports of the dual-CP feeds at K- and Ka-band; simulated and measured AR and gain of the radiated CP wave achieved by exciting the RCP and LCP ports of the K-band feed (c) and the RCP and LCP ports of the Ka-band feed (d). References to color refer to the online version of this figure

- The measured reflection magnitudes of all four input ports are below  $-13$  dB over a broad band of 16–22 GHz at the K-band and 28–35 GHz at the Ka-band. The mutual coupling between co-band cross-polarized ports has measurement values below  $-13$  and  $-17$  dB at the lower and higher bands, respectively.
- In the frequency ranges of 16–22 GHz and 27–35 GHz, the measured AR values of the RCP and LCP beams are below 2.1 dB, while the peak CP gain fluctuates from about 7.0 to 8.0 dBic.

# Major results

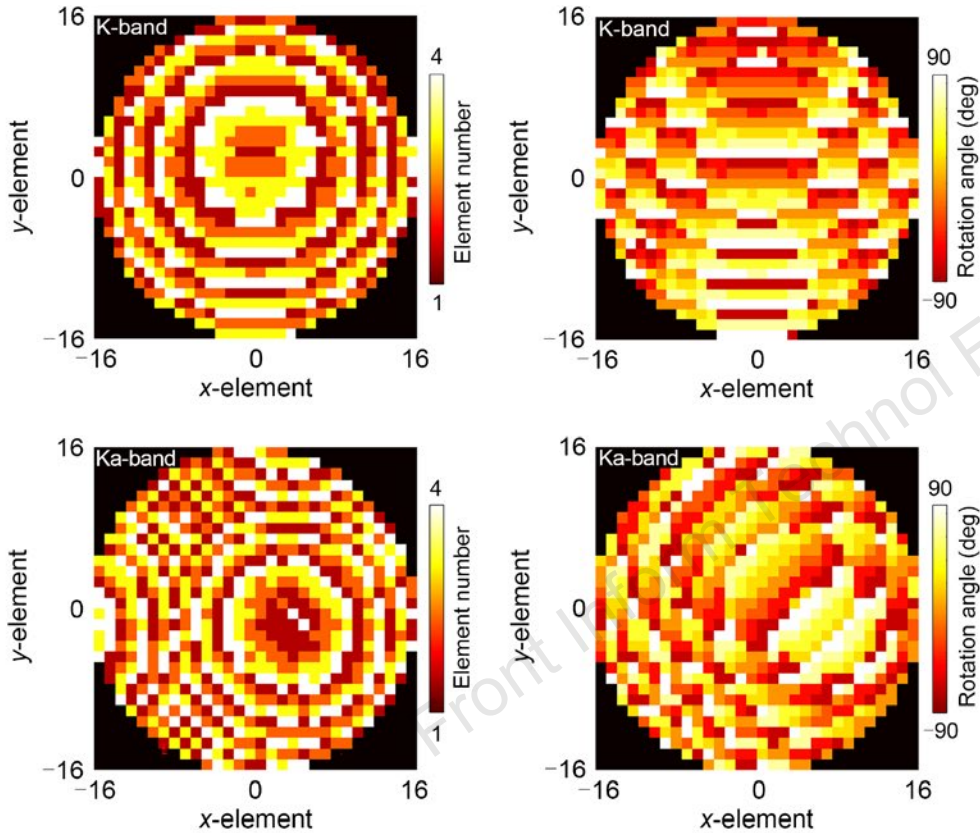

(a)

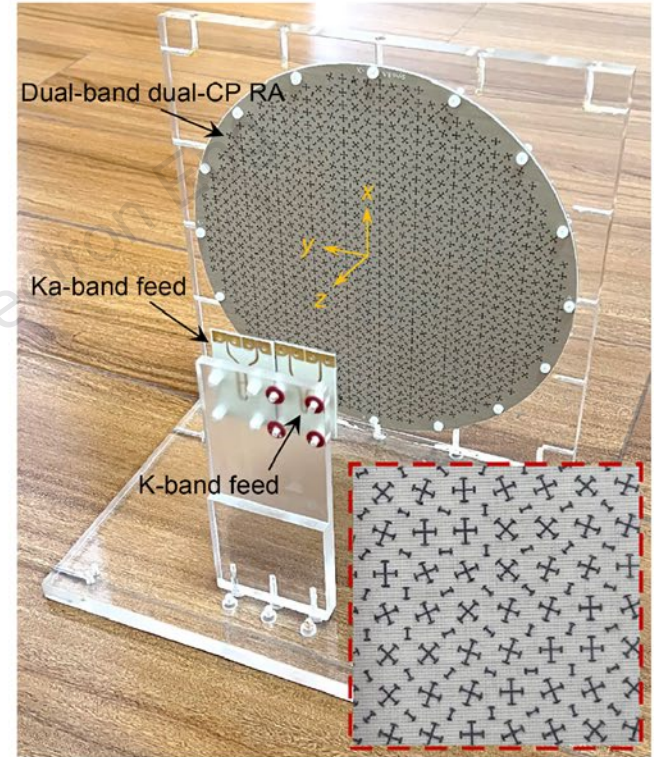

(b)

**Fig. 11** (a) Element number and rotation angle distributions of the K- and Ka-band elements of the dual-band dual-CP RA design; (b) photograph of the dual-band dual-CP RA prototype integrated with the broadband dual-CP planar feeds. The inset shows an enlarged view of a portion of the top metallic layer of the RA



# Major results

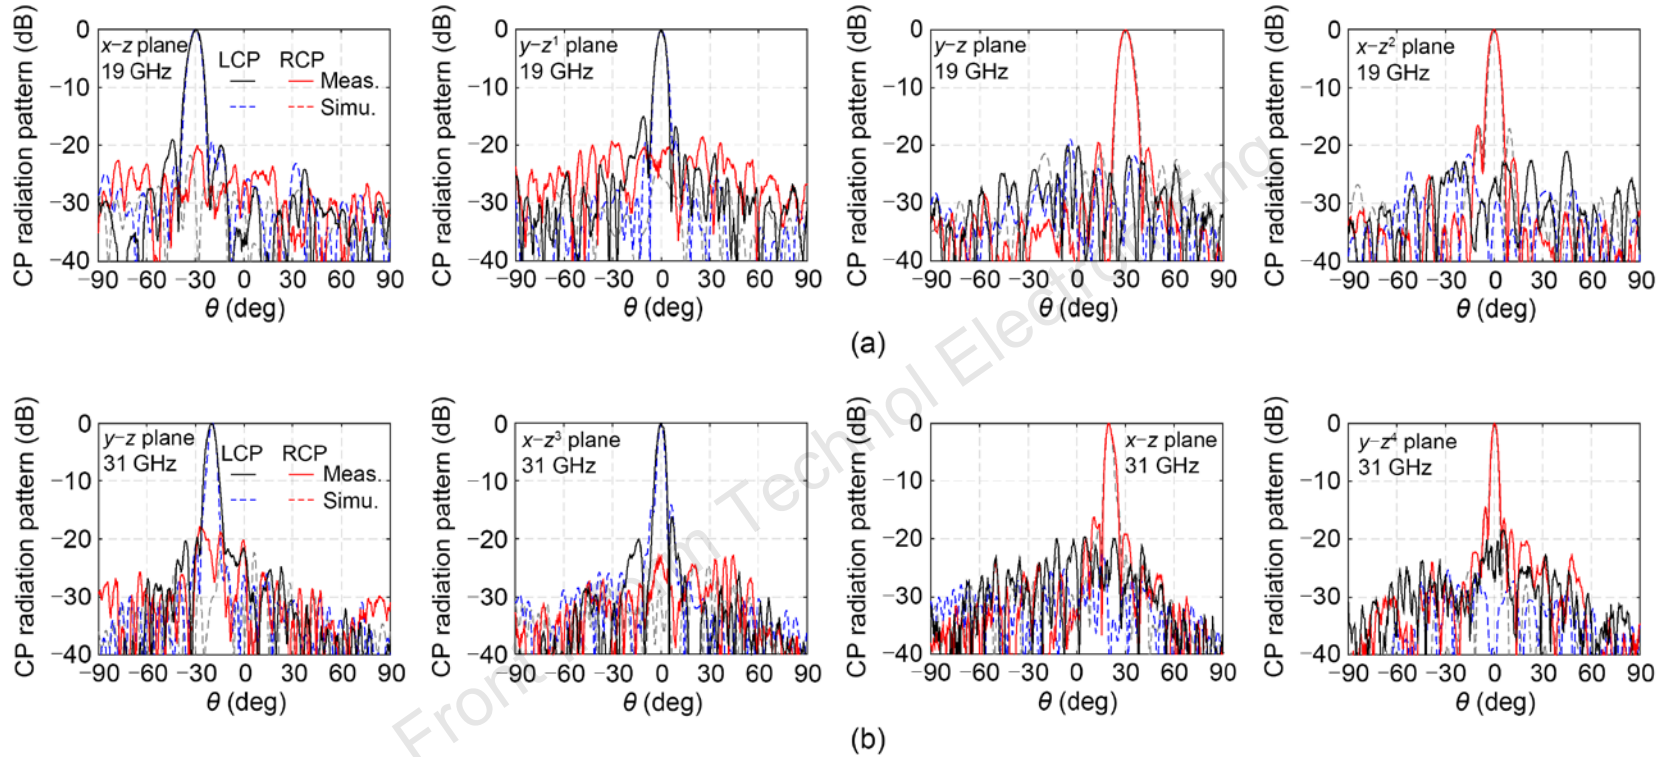
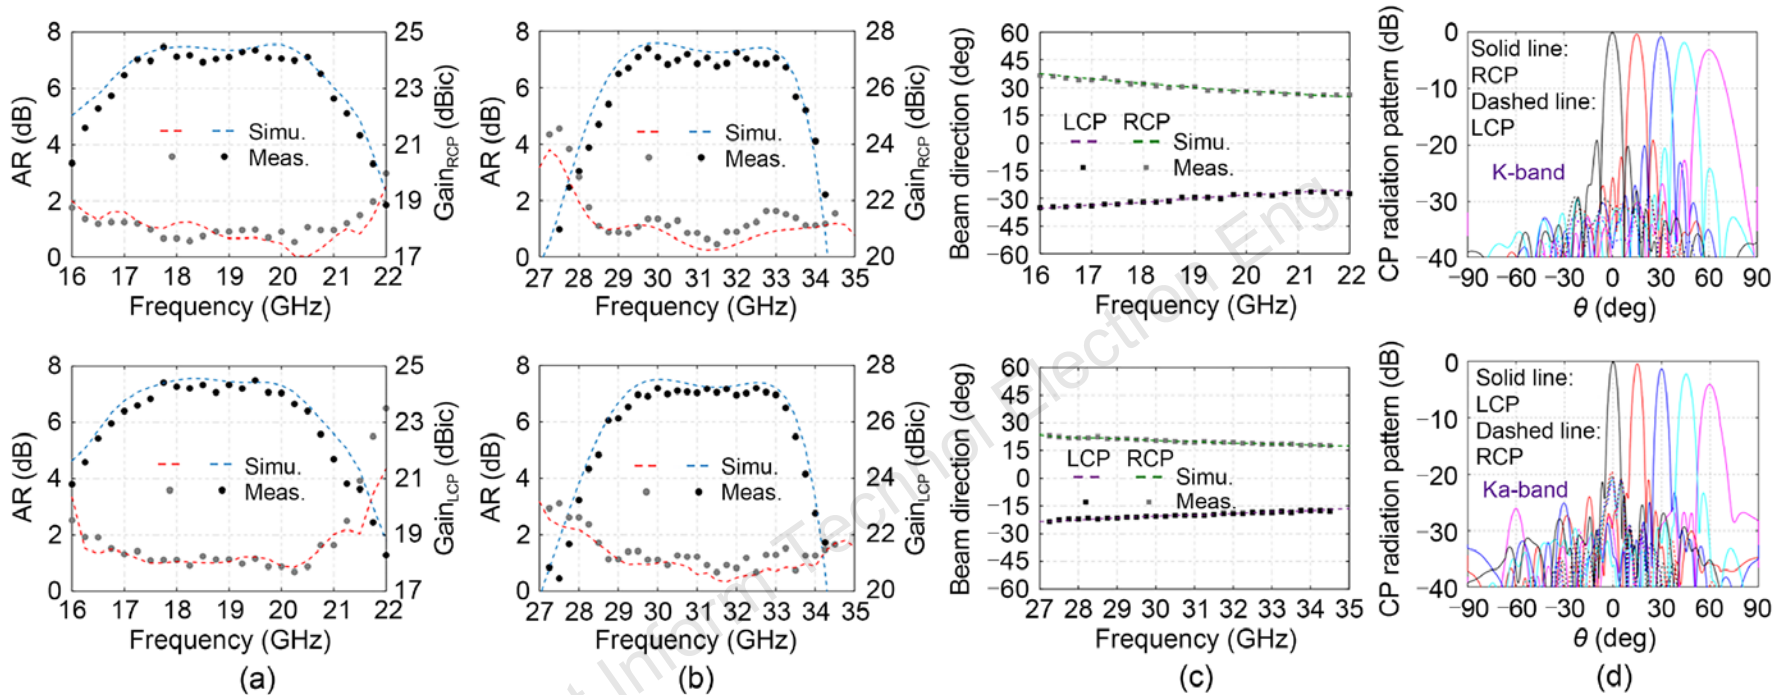


Fig. 12 Simulated and measured normalized CP radiation patterns in the two orthogonal planes cutting through the main beam of the dual-band dual-CP RA at 19 GHz (a) and 31 GHz (b), where  $z^1 = z \cos 30^\circ - x \sin 30^\circ$ ,  $z^2 = z \cos 30^\circ + y \sin 30^\circ$ ,  $z^3 = z \cos 20^\circ - y \sin 20^\circ$ , and  $z^4 = z \cos 20^\circ + x \sin 20^\circ$

- At 19 and 31 GHz, the targeted beam directions for LCP and RCP beams in the lower and higher bands are  $(\theta_L, \varphi_L)_K = (-30^\circ, 0^\circ)$ ,  $(\theta_R, \varphi_R)_K = (30^\circ, 90^\circ)$ ,  $(\theta_L, \varphi_L)_{Ka} = (-20^\circ, 90^\circ)$ ,  $(\theta_R, \varphi_R)_{Ka} = (20^\circ, 0^\circ)$ .

# Major results



**Fig. 13** Simulated and measured peak gain and AR as a function of frequency for the dual-band dual-CP RA for the K-band (a) and Ka-band (b); (c) simulated and measured beam directions for the dual-band dual-CP RA antenna as a function of frequency; (d) performance of the K-band RCP beam (top) and Ka-band LCP beam (bottom) with different pointing angles of the RA antenna

- The measured peak gain values for RCP/LCP beams are 24.5/24.3 dBic and 27.3/27.1 dBic in the K- and Ka-band, respectively, corresponding to measured aperture efficiencies of about 26.9% and 19.8%.
- The measured joint 1-dB gain and  $\text{AR} < 2$  dB bandwidth is, on average, about 20.6% and 14.6% for the CP beams in the K- and Ka-band, respectively.

# Conclusions

1. The demonstrated low-profile dual-broadband dual-CP RA is a promising candidate for satellite and space communication systems.
2. By jointly exploiting the dynamic and rotation phase compensation and interleaving K-/Ka-band multi-layered phase shifting elements in a shared aperture, independent phase shifts for RCP and LCP waves at both bands can be accomplished.
3. Planar K-/Ka-band dual-CP feeds with a broad band are designed based on the magnetoelectric dipoles and multi-branch hybrid couplers for reducing the overall profile.



Xuanfeng TONG was born in Taizhou, Jiangsu, China, in 1993. He received the BS degree from Chifeng University, Chifeng, China, in 2016, the MS degree from the School of Electronic Information, Soochow University, Suzhou, China, in 2019, and the PhD degree from School of Information Science and Engineering, Southeast University, Nanjing, China, in 2023. He is currently a Lecturer with the College of Electronic and Optical Engineering, and the Institute of Flexible Electronics (Future Technology), Nanjing University of Posts and Telecommunications, China. He was a recipient of the 2018 National Scholarship for Graduate Students, the Best Student Paper Award at the 2021 IEEE International Workshop on Electromagnetics (iWEM), the Best Student Paper Honorable Mention at the 2022 International Conference on Microwave and Millimeter Wave Technology (ICMMT), and the Honorable Mention Award at the 16<sup>th</sup> UK-Europe-China Workshop on Millimeter Waves and Terahertz Technologies (UCMMT). His main research interests include dual-band and dual-polarized antenna, reflectarray, transmitarray, and transmit-reflect-array.




Zhi Hao JIANG was born in Nanjing, China, in 1986. He received the BS degree in radio engineering from Southeast University, Nanjing, in 2008, and the PhD degree in electrical engineering from The Pennsylvania State University, University Park, State College, PA, USA, in 2013. From 2013 to 2016, he was a Post-Doctoral Fellow with the Computational Electromagnetics and Antennas Research Laboratory, Department of Electrical Engineering, The Pennsylvania State University. He is currently a Professor with the State Key Laboratory of Millimeter Waves, School of Information Science and Engineering, Southeast University. He has authored or co-authored more than 100 papers in peer-reviewed journals, over 70 papers in conference proceedings, as well as 9 book chapters. He has also co-edited two books, *Electromagnetic Vortices: Wave Phenomena and Engineering Applications* (Wiley/IEEE Press, 2021) and *Electromagnetics of Body-Area Networks: Antennas, Propagation, and RF Systems* (Wiley/IEEE Press, 2016). He holds 7 granted U.S. patents and 15 granted Chinese patents. He has served as the TPC Co-Chair or a TPC Member for multiple international conferences. He was a recipient of the Outstanding Youth Scholar of National Science Foundation of China in 2021, the IEEE Microwave Prize in 2021, the Young Scientist Award at the URSI-GASS in 2020, the Young Scientist Award at the 2019 ACES-China Conference, the High-Level Innovative and Entrepreneurial Talent presented by Jiangsu Province, China, in 2017, the Thousands of Young Talents presented by China government in 2016, the 2012 A. J. Ferraro Outstanding Doctoral Research Award in Electromagnetics, and several best (student) paper awards at international conferences. He is a Senior Member of CIE, an Associate Editor of *IET Communications*, and a Guest Editor of *Int J RF Microw Comput-Aided Eng*. His current research interests include microwave/ millimeter-wave antennas and circuits, millimeter-wave systems, impedance surfaces, metamaterials, and analytical methods.






Yuan LI was born in Huainan, Anhui, China, in 1994. He received the BS degree from University of Electronic Science and Technology of China (UESTC), Chengdu, China, in 2017. He is currently pursuing the PhD degree with Southeast University, Nanjing, China. His main research interests include circular polarization selective surface, metasurface, reflectarray, and transmitarray.



Fan WU was born in Jiangxi, China. He received the BE and ME degrees in electronic engineering from Beijing Jiaotong University, Beijing, China, in 2012 and 2015, respectively, and the PhD degree in electronic engineering from City University of Hong Kong, Hong Kong, China in 2018. He is currently an Assistant Professor with the State Key Laboratory of Millimeter Waves, School of Information Science and Engineering, Southeast University, Nanjing, China. He was a recipient of the Honorable Mention at the student contest of the 2018 IEEE APS-URSI Conference and Exhibition held in Boston, USA. He served as a regular reviewer for numerous peer-reviewed international journals including *IEEE T-AP* and *AWPL*. His current research is in the areas of space-fed antennas, circularly-polarized wideband antennas, and reconfigurable antenna designs.



Lin PENG received the BS degree in information engineering and the MS degree in electromagnetic field and microwave technique from Nanjing University of Science and Technology, Nanjing, China, in 2004 and 2006, respectively. Since 2006, he has been with ZTE Corporation, Shenzhen, China, where he researches wireless communications. His current research interests include beyond-5G and 6G technology, millimeter-wave and terahertz communication, and intelligent reflecting surface for wireless applications.



Taiwei YUE was born in Wuhan, China, in 1991. He received the BS degree in physics from Nanjing University, Nanjing, China, in 2013, and the PhD degree in electrical engineering from The Pennsylvania State University, University Park, PA, USA, in 2018. He is currently a Hardware Engineer with Apple Inc., Cupertino, CA, USA. From September 2018 to July 2020, he was a Hardware Engineer with Hughes Network Systems, LLC, Germantown, MD, USA. His research interests include antenna/phased array engineering, RF front end (RFFE) design, metamaterials, and plasmonics.



Wei HONG received the BS degree from the University of Information Engineering, Zhengzhou, China, in 1982, and the MS and PhD degrees from Southeast University, Nanjing, China, in 1985 and 1988, respectively, all in radio engineering. He has been with the State Key Laboratory of Millimeter Waves, Southeast University, since 1988, where he has also been the Director of the Laboratory since 2003. He is currently a Professor of the School of Information Science and Engineering with Southeast University. In 1993 and 1995–1998, he was a short-term Visiting Scholar with the University of California at Berkeley and at Santa Cruz, CA, USA, respectively. He has authored or co-authored over 300 technical publications and authored two books. He was an Elected IEEE MTT-S AdCom Member during 2014–2016. He is a fellow of IEEE and Chinese Institute of Electronics (CIE). He twice awarded the National Natural Prizes, and thrice awarded the first-class Science and Technology Progress Prizes issued by the Ministry of Education of China and Jiangsu Province Government. Besides, he was supported by the NNSF of China for Distinguished Young Investigators and Innovation Group. He is a Vice President of the CIE Microwave Society and Antenna Society and Chair of the IEEE MTT-S/APS/EMCS Joint Nanjing Chapter. He served as an Associate Editor of *IEEE Trans Microw Theory Techn* from 2007 to 2010, and a Guest Editor for the 5G special issue of *IEEE Trans Antenn Propag* in 2017. His current research interests include numerical methods for electromagnetic problems, millimeter-wave theory and technology, antennas, electromagnetic scattering, and RF technology for mobile communications.