

Minghui PANG, Qiuming ZHU, Zhipeng LIN, Fei BAI, Yue TIAN, Zhuo LI, Xiaomin CHEN, 2022.
Machine learning based altitude-dependent empirical LoS probability model for air-to-ground
communications. *Frontiers of Information Technology & Electronic Engineering*, 23(9):1378-1389.
<https://doi.org/10.1631/FITEE.2200041>

Machine learning based altitude-dependent empirical LoS probability model for air-to-ground communications


Key words: Line-of-sight probability model; Air-to-ground channel (A2G);
Machine learning; Ray tracing

Corresponding author: Qiuming ZHU

E-mail: zhuqiuming@nuaa.edu.cn

 ORCID: <https://orcid.org/0000-0002-4995-5970>

Motivations

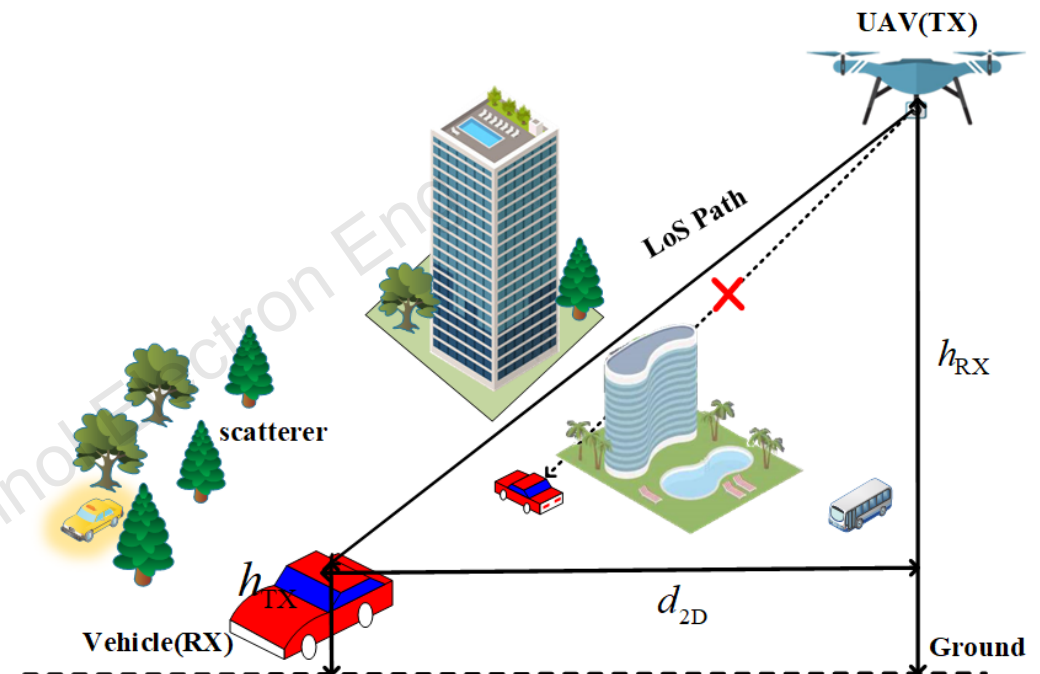

- UAV: high mobility, easy operation, easy control
- A2G communication in the communication integrated network
 - The connectivity and reliability of A2G mmWave signal transmission depend on the existence of the LoS path
- A2G communication involves 3D scattering space
- The communication altitude needs to be considered

■ To design and optimize A2G mmWave communication systems, **altitude-dependent LoS probability models** are necessary.

Motivations (Cont'd)

■ Existing stochastic LoS probability models

- **Analytical models** (ITU-R. 1410, Al-Hourani's model...)
Improve accuracy - detailed geometry information ✗
- **Measurement-based empirical models** (3GPP, WINNER, ...)
Field-measurement - complex and costly ✗
- **Simulation-based empirical models** [NYU (below dozens of meters), HAP (over several kilometers), Lee's model (terrestrial communications), ...]
...
cannot be employed in **air-to-ground (A2G)** communication ✗

RT-based empirical model


■ Existing parameter estimation methods

- **minimum mean square error (MMSE)**
 - **least square (LS) ...**
Relationship is uncertain - Ineffective ✗
- ### ■ ML-based parameter estimation
- **K-nearest neighbors (KNN)**
 - **Artificial neural network (ANN) ...**
Internal connection of parameters - accurate

↓ **Motivation**

- **Multi-height empirical LoS probability models**
- **Machine learning based model-parameter estimation methods**

New multi-height empirical LoS probability model

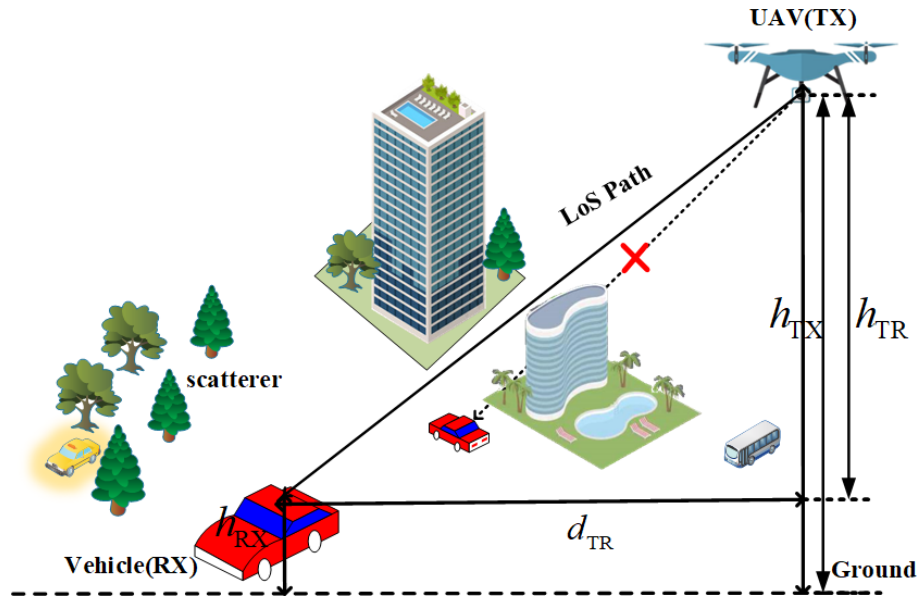

3GPP LoS probability model

(18 m) Breakpoint distance at which the LoS probability is no longer equal to 1

$$P_{\text{LoS}}^{3\text{GPP}}(d_{\text{TR}}) = \min\left(\frac{D_1}{d_{\text{TR}}}, 1\right) \cdot \left[1 - \exp\left(-\frac{d_{\text{TR}}}{D_2}\right)\right] + \exp\left(-\frac{d_{\text{TR}}}{D_2}\right)$$

Distance between RX and TX

A decay parameter (36 m)

New York University LoS probability model

$$P_{\text{LoS}}^{\text{NYU}}(d_{\text{TR}}) = \left[\min\left(\frac{D_1}{d_{\text{TR}}}, 1\right) \left[1 - \exp\left(-\frac{d_{\text{TR}}}{D_2}\right)\right] + \exp\left(-\frac{d_{\text{TR}}}{D_2}\right) \right]^2$$

New LoS probability model

$$P_{\text{LoS}}(d_{\text{TR}}, h_{\text{TR}}) = \left\{ \min\left(\frac{D_1(h_{\text{TR}})}{d_{\text{TR}}}, 1\right) \cdot \left[1 - \exp\left(-\frac{d_{\text{TR}}}{D_2(h_{\text{TR}})}\right)\right] + \exp\left(-\frac{d_{\text{TR}}}{D_2(h_{\text{TR}})}\right) \right\} D_3(h_{\text{TR}})$$

Height of TX

Influence of altitude


New parameter (balance)

Parameter estimation procedure

■ Flowchart of parameter estimation

Steps:

- Scenarios reconstruction
- RT technology (KNN training data)
- KNN-based LoS/NLoS identification
- LS fitting (BPNN training data)
- BPNN-based parameter training
- Introduce the altitude factor

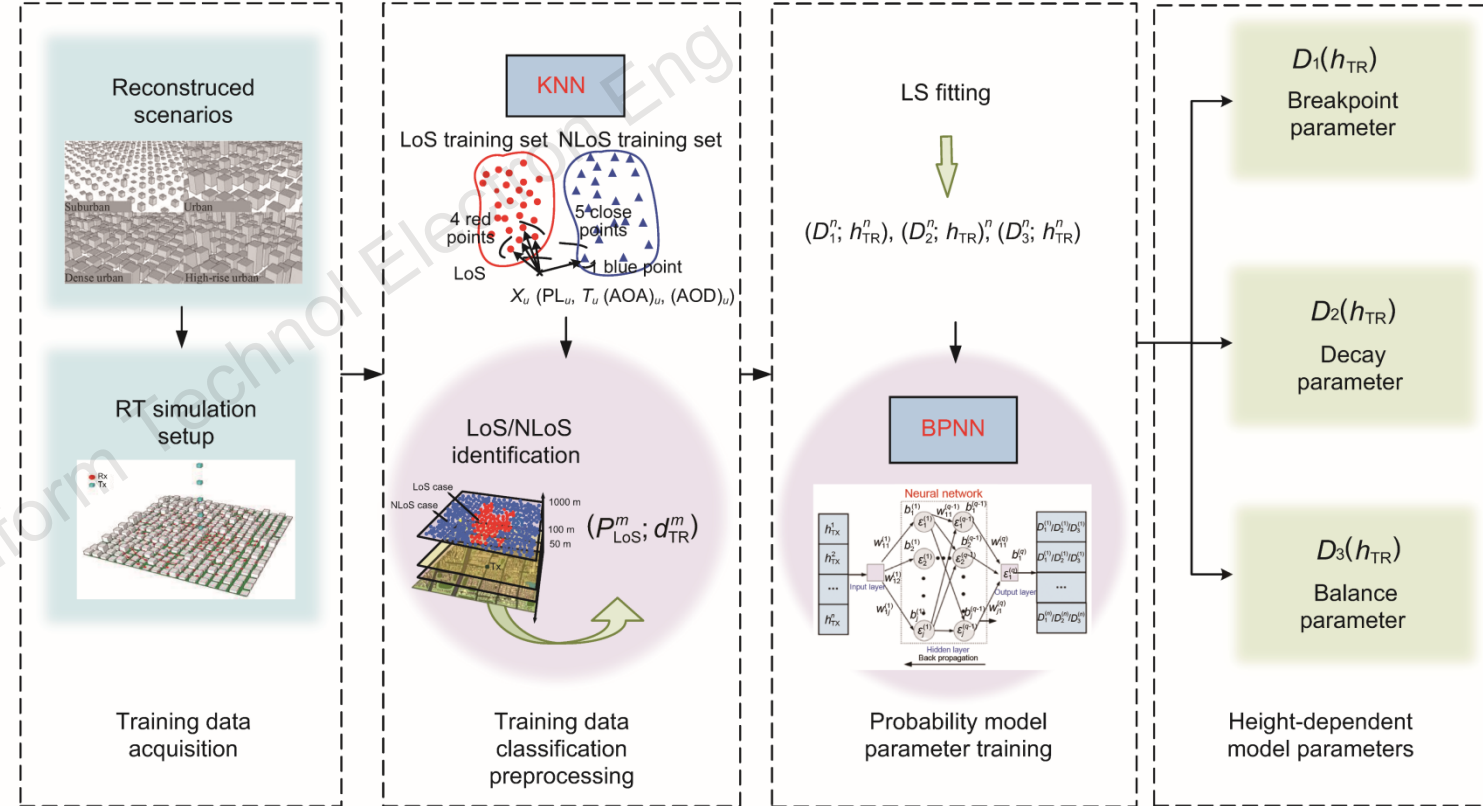

Flowchart of parameter estimation

RT-based training data acquisition

■ Scenario reconstruction

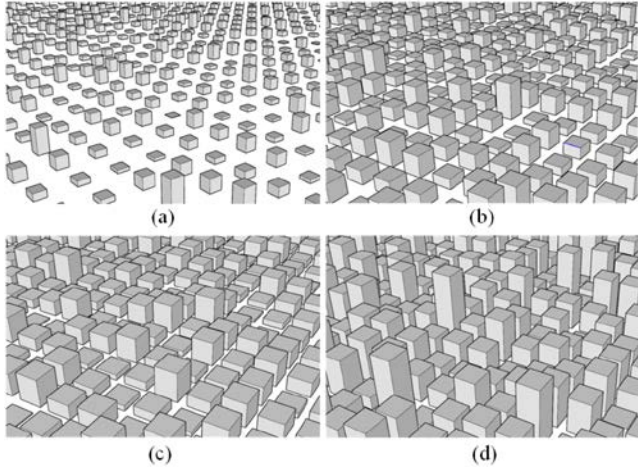


Fig. 2 An illustration of reconstructed scenarios:
(a) suburban; (b) urban; (c) dense urban; (d) high-rise urban

Scenario parameters

Parameter	Value
Buildings area ratio	0.3
Number of buildings (/km ²)	500
Building height	Rayleigh distribution (15 m)
Building width	40.8 m
Street spacing	16.91 m

■ RT simulation


Simulation parameters

Parameter	Value
Frequency	28 GHz
Bandwidth	500 MHz
Antenna type	Omnidirectional
TX height (interval)	5~1005 m (10 m)
RX height	2 m
RX distance	0~1000 m

■ RT channel characteristic computation

- Decomposing the ray source
- Tracking rays
- Intersection operation
- Calculating the channel characteristics (path loss, delay, angles of arrival, angles of departure)

KNN-based LoS/NLoS classification

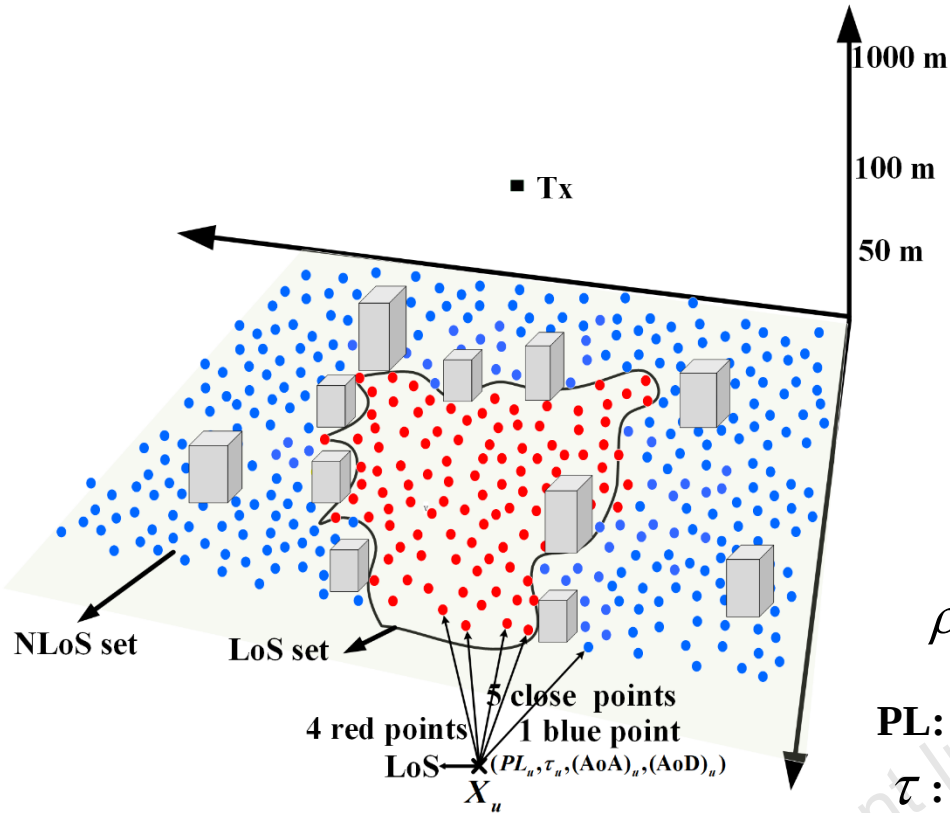

Flowchart of parameter estimation

Linear normalization method

$$x' = \frac{x - \min(x)}{\max(x) - \min(x)}$$

Input values of four features The normalized value

Euclidean distance calculation formula

$$\rho = \sqrt{([PL_u] - [PL_v])^2 + ([\tau_u] - [\tau_v])^2 + [(AoA)_u] - [(AoA)_v]^2 + [(AoD)_u] - [(AoD)_v]^2}$$

PL: path loss

AoA: angles of arrival

□: new input data

τ : delay

AoD: angles of departure

□: v^{th} labeled data in the KNN network



Identify LoS/NLoS


■ Obtain the **LoS probability** corresponding to each height and distance which can be denoted by $(P_{\text{LoS}}^{m,n}; d_{\text{RX}}^m, h_{\text{TX}}^n), m = 1, 2, \dots, 99, n = 1, 2, \dots, 100$.

BPNN-based parameter estimation

BPNN training

KNN-based LoS/NLoS Classification data


LS fitting

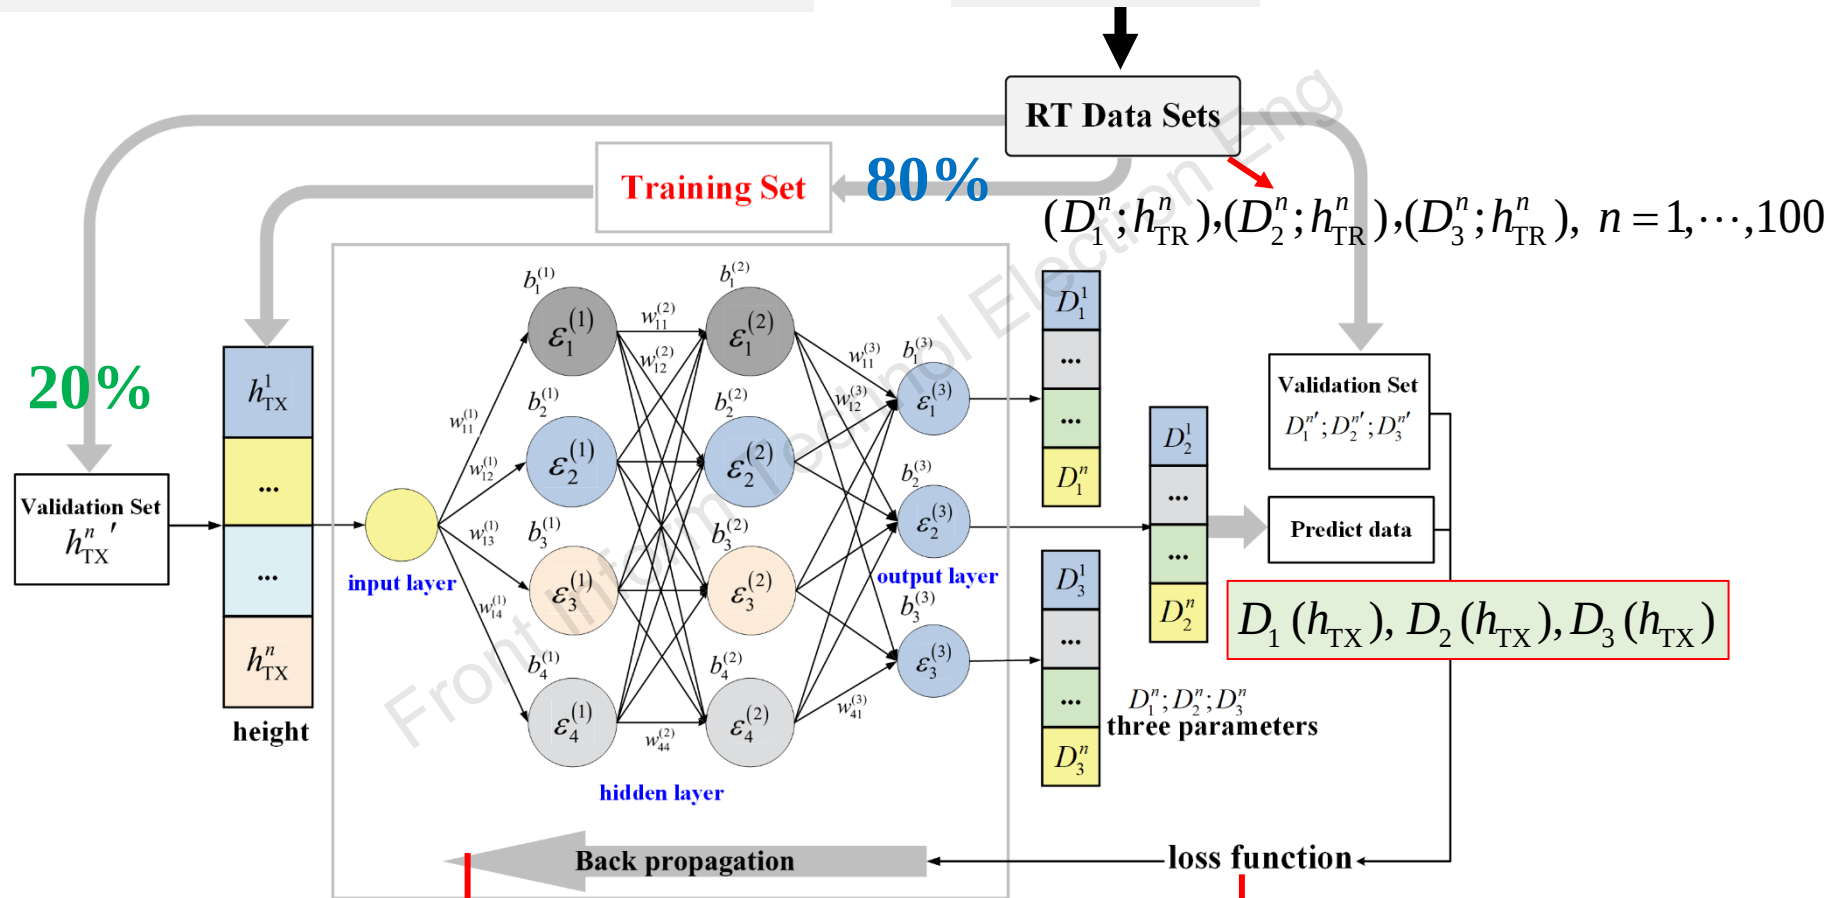

$$\varepsilon_{\text{sig}}(x) = \frac{1}{1 + e^{-x}}$$

$$L_F = \sqrt{\frac{1}{N} \sum_{n=1}^N (D_k(h_{\text{TR}}^n) - D_k^n)^2}$$





Results of KNN-based classification

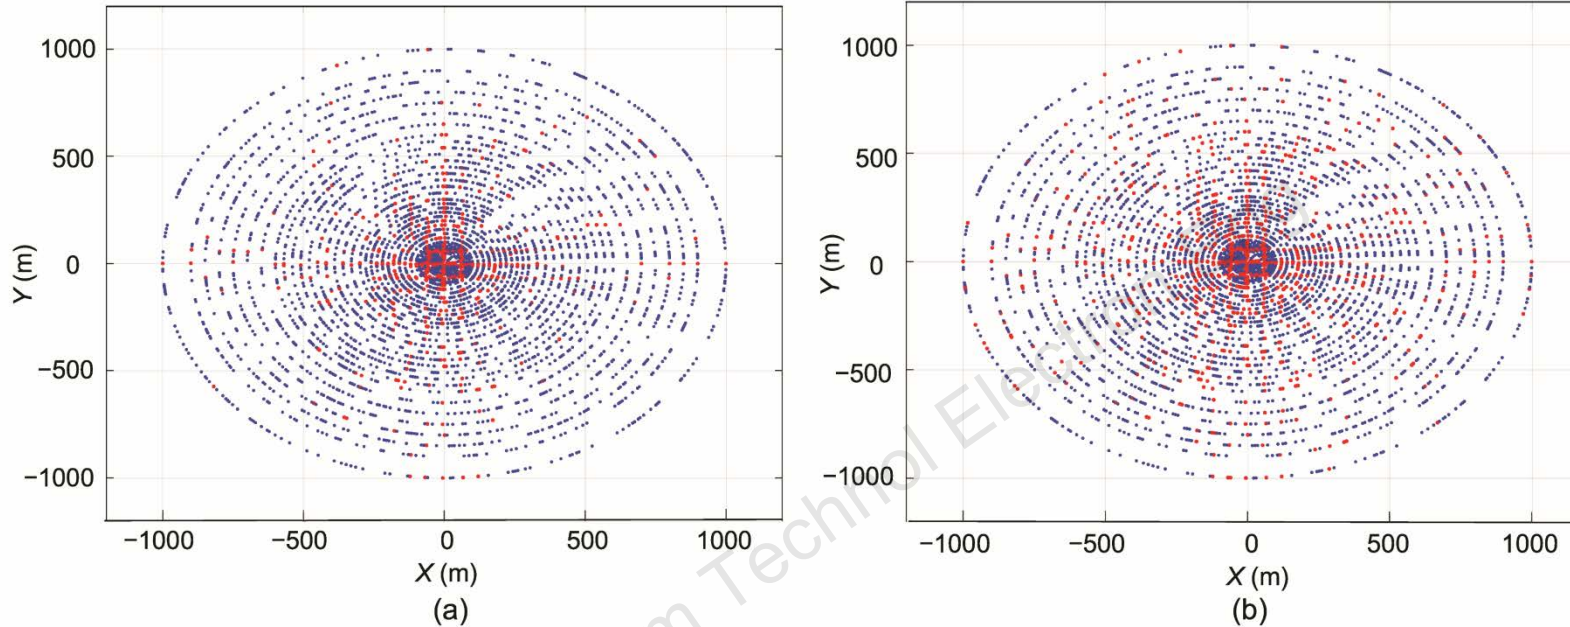

Judgment result under dense urban scenario: (a) $h=200$ m; (b) $h=400$ m

- The red points are the LoS paths while the blue are NLoS paths.
- We can see that the number of LoS paths decreases as the distance increases while the number of LoS paths increases when the UAV altitude increases.
- Note that some square areas close to the center are still NLoS, because they are blocked by buildings in the scenario.

Results of BPNN-based estimation

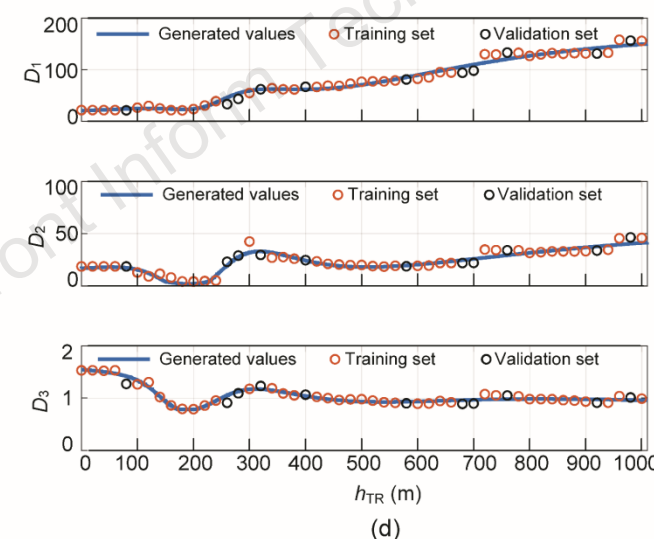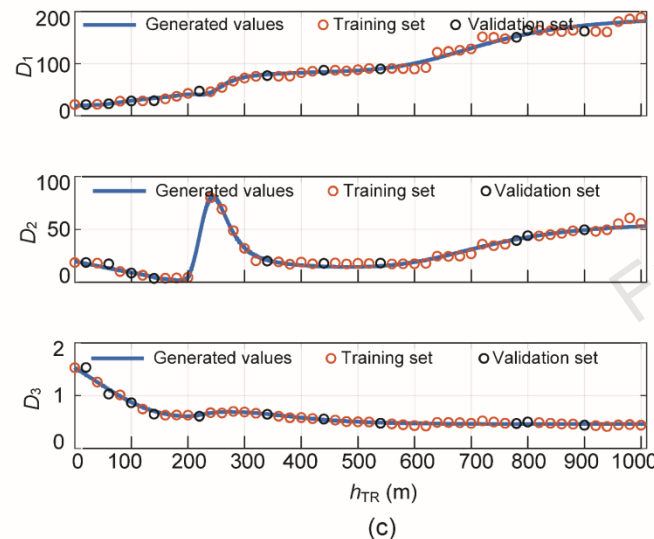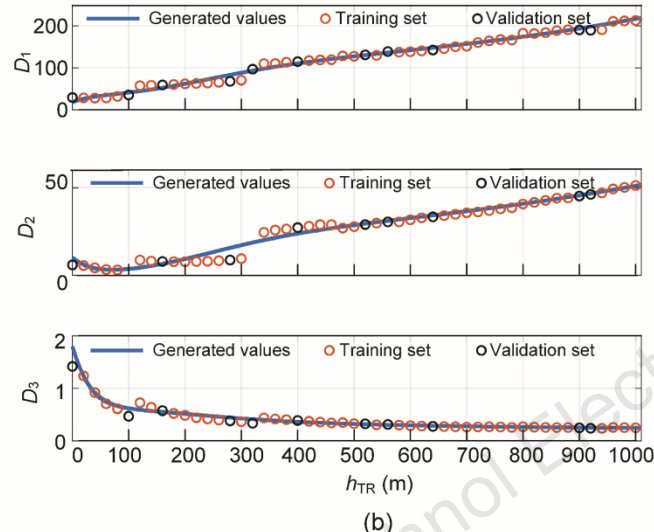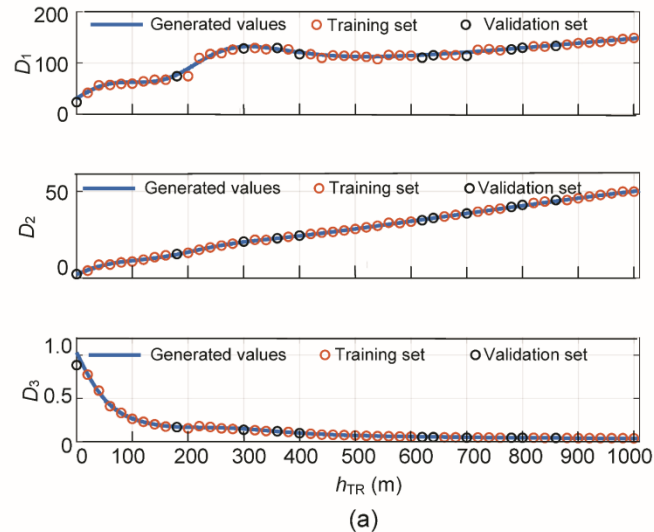


- The parameters D_1 , D_2 , and D_3 increase as the height increases. (When the UAV height increases, the distance range of the existing LoS path becomes larger).
- The prediction values are in **good agreement** with the original values in the validation set.
- The parameter estimation method can describe the **relationship between parameters and height**.

Training results for height-dependent parameters under different scenarios:
(a) suburban; (b) urban; (c) dense urban; (d) high-rise urban

Comparison and validation

Comparison

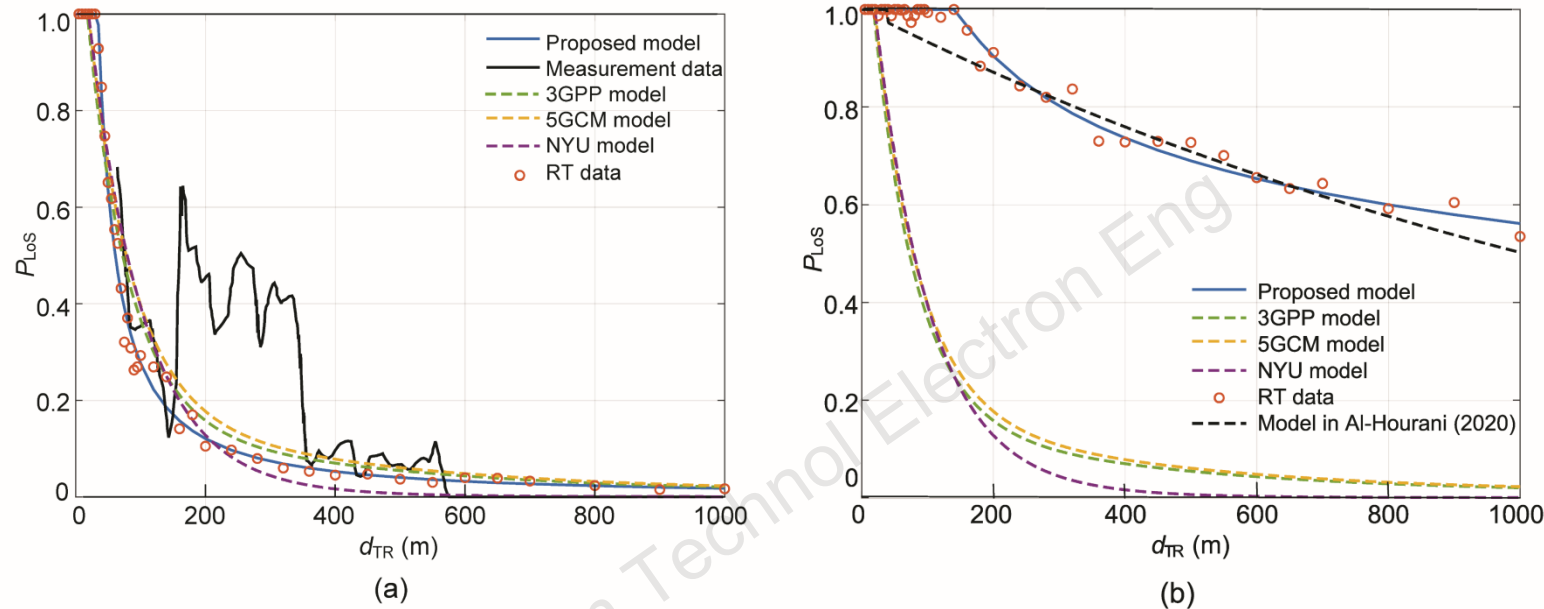

Comparisons of different models at different altitudes: (a) low altitude ($h_{Tx}=40$ m); (b) high altitude ($h_{Tx}=600$ m)

- The proposed model's results have good agreement with RT data, and are very similar to those of other representative models (3GPP, 5GCM, NYU). Our model is suitable for low altitude and is compatible with existing low altitude models. The measured data in [2] also agrees with the prediction results.
- Most standard models do not consider the height factor, and the prediction results are unreasonable. Similar to [3], it takes the buildings as random points following the Poisson point process and the heights as a log-normal distribution, so the results are different.

[2] S. Sun, T. A. Thomas, T. S. Rappaport, H. Nguyen, I. Z. Kovacs and I. Rodriguez, "Path loss, shadow fading, and line-of-sight probability models for 5G urban macro-cellular scenarios," IEEE Globecom Workshops, San Diego, CA, 2015, pp. 1-7.

[3] A. Al-Hourani, "On the probability of line-of-sight in urban environments," IEEE Wireless Communications Letters, vol. 9, no. 8, pp. 1178-1181, Aug. 2020, doi: 10.1109/LWC.2020.2984497

Conclusions

- 🎓 The altitude-dependent empirical LoS probability model based on machine learning has been proposed for A2G scenarios.
- 🎓 The KNN algorithm has been applied to classify the LoS and NLoS paths according to the RT simulation data with the recognition accuracy rate as high as 0.995.
- 🎓 To introduce the factor of height to the LoS probability, a two-layer BPNN has been developed to estimate the parameters of the proposed LoS probability model, which has better performance than other regression algorithms.
- 🎓 Simulation results have demonstrated that the prediction results of our proposed LoS probability model can achieve good versatility at both low and high altitudes and have good agreement with RT simulation and measurement data.

References

- [1] Q. Zhu, Y. Wang, K. Jiang, X. Chen, W. Zhong and N. Ahmed, "3D non-stationary geometry-based multi-input multi-output channel model for UAV-ground communication systems," IET Microwaves, Antennas & Propagation, vol. 13, no. 8, pp. 1104-1112, June 2019. doi: 10.1049/iet-map.2018.6129.
- [2] Q. Zhu, M. Yao, F. Bai, X. Chen, W. Zhong, et al., "A general altitude-dependent path loss model for UAV-to-ground millimeter-wave communications, " Frontiers of Information Technology & Electronic Engineering, 2021, 22(6):767-776.
- [3] M. K. Samimi, T. S. Rappaport and G. R. MacCartney, "Probabilistic omnidirectional path loss models for millimeter-wave outdoor communications," IEEE Wireless Communications Letters, vol. 4, no. 4, pp. 357-360, Aug. 2015, doi: 10.1109/LWC.2015.2417559.
- [4] J. Lee, J. Choi and S. Kim, "Cell coverage analysis of 28 GHz millimeter wave in urban microcell environment using 3-D ray tracing," IEEE Transactions on Antennas and Propagation, vol. 66, no. 3, pp. 1479-1487, Mar. 2018, doi: 10.1109/TAP.2018.2797531.
- [5] Q. Zhu, K. Mao, M. Song, X. Chen, B. Hua, and et al., "Map-based channel modeling and generation for U2V mmWave communication," IEEE Transactions on Vehicular Technology, vol. 71, no. 8, pp. 8004–8015, Aug. 2022.
- [6] M. Yang, B. Ai, R. He, C. Huang, Z. Ma, et al., "Machine-learning-based fast angle-of-arrival recognition for vehicular communications," in IEEE Transactions on Vehicular Technology, vol. 70, no. 2, pp. 1592-1605, Feb 2021.
- [7] W. Li, J. Zhang, X. Ma, Y. Zhang, H. Huang, and Y. Cheng, "The way to apply machine learning to IoT driven wireless network from channel perspective," China Commun., vol. 16, no. 1, pp. 148–164, Jan. 2020.
- [8] Q. Zhu, H. Li, Y. Fu, C.-X. Wang, Y. Tan, X. Chen, and Q. Wu, "A novel 3D non-stationary wireless MIMO channel simulator and hardware emulator," IEEE Trans. Commun., vol. 66, no. 9, pp. 3865–3878, Sept. 2018.
- [9] X. You, C. Wang, J. Huang, X. Gao, Z. Zhang and et al., "Towards 6G wireless communication networks: vision, enabling technologies, and new paradigm shifts," Science China Information Science, vol. 64, no. 1, pp. 1–74, Jan. 2021.
- [10] J. Holis and P. Pechac, "Elevation dependent shadowing model for mobile communications via high altitude platforms in built-up areas," IEEE Transactions on Antennas and Propagation, vol. 56, no. 4, pp. 1078-1084, April 2008, doi: 10.1109/TAP.2008.919209.
- [11] A. Al-Hourani, "On the probability of line-of-sight in urban environments," IEEE Wireless Communications Letters, vol. 9, no. 8, pp. 1178-1181, Aug. 2020, doi: 10.1109/LWC.2020.2984497.

Author profiles



Minghui Pang received her BS degree in information engineering from Nanjing University of Aeronautics and Astronautics in Nanjing, China in 2020. She is currently pursuing her MS degree in electronic science and technology from Nanjing University of Aeronautics and Astronautics (NUAA), Nanjing, China. She has authored or coauthored more than 10 articles in refereed journals and conference proceedings. Her research interests include channel modeling and unmanned aerial vehicle (UAV) communication systems.



Qiuming Zhu received his BS degree in electronic engineering from NUAA in 2002 and his MS and PhD degrees in communication and information system from NUAA in 2005 and 2012, respectively. Since 2021, he has been a professor in the Department of Electronic Information Engineering, NUAA. From Oct. 2016 to Oct. 2017 and June 2018 to Aug. 2018, he was also an academic visitor at Heriot-Watt University, Edinburgh, UK. He has authored or coauthored more than 120 articles in refereed journals and conference proceedings and holds over 40 patents. His current research interests include channel sounding, modeling, and emulation for the fifth/sixth generation (5G/6G) mobile communication, vehicle-to-vehicle (V2V) communication, and UAV communication systems.



Zhipeng Lin received his PhD degrees from the School of Information and Communication Engineering, Beijing University of Posts and Telecommunications, Beijing, China, and the School of Electrical and Data Engineering, University of Technology of Sydney, NSW, Australia, in 2021. Currently, He is an Associate Researcher in the College of Electronic and Information Engineering, NUAA. His current research interests include signal processing, massive MIMO, spectrum sensing, and UAV communications.