*Environmental Contamination: Causes and Solutions*
https://www.sciltp.com/journals/eccs

*Article*

# Investigation of Per- and Polyfluoroalkyl Substances (PFAS) Adsorption onto the Medium Size Quartz Gravel

Omotola Folorunsho, Anna Bogush and Ivan Kourtchev *

Centre for Agroecology Water and Resilience (CAWR), Coventry University, Wolston Lane, Ryton on Dunsmore, Coventry CV8 3LG, UK
* Correspondence: ivan.kourtchev@coventry.ac.uk

**How To Cite:** Folorunsho, O.; Bogush, A.; Kourtchev, I. Investigation of Per- and Polyfluoroalkyl Substances (PFAS) Adsorption onto the Medium Size Quartz Gravel. *Environmental Contamination: Causes and Solutions* **2025**, *1*(1), 4. https://doi.org/10.53941/eccs.2025.100004

Received: 14 June 2025
Revised: 14 July 2025
Accepted: 11 August 2025
Published: 22 August 2025

**Abstract:** Poly- and perfluoroalkyl substances (PFAS) are persistent chemicals that may pose risks to ecosystems and human health. Understanding the environmental fate and transport of PFAS is challenging due to their ability to migrate across air, water, and soil. In surface waters, PFAS can interact with sediments, organic matter, and plants, influencing the mobility of these compounds and posing potential risks to the environment. This study provides the first analysis of the adsorption of PFAS, including perfluoro-carboxylic acids (PFCA, C4–C10), perfluoro-sulfonic acids (PFSA, C4–C8), per-/poly-fluoroalkylether acids (PFEA C4-C8) and fluorotelomer sulfonates (FTS, C8 and C10) to medium-sized quartz gravel (pebbles), commonly found in the UK river systems. The effects of exposure time (1, 3 and 7 days) and mechanical disturbance (shaking) on PFAS adsorption were evaluated. The degree of PFAS adsorption indicated a clear dependence on the compound's functional group and carbon chain length. Long-chain PFAS, perfluorodecanoic acid (PFDA), exhibited the highest adsorption, while PFCA showed the least sorption compared to corresponding PFEA, PFSA and FTS of homologues (C5–C8). Mechanical disturbance (shaking) of gravel in PFAS-contaminated water did not significantly influence the extent of adsorption on most of the studied analytes except 9 Cl-PF3OUdS, 8:2 FTS, and PFDA, onto the gravel. The study demonstrates, for the first time, that medium-sized quartz gravel can adsorb PFAS, including new-generation substitutes from water. In riverine systems, these pollutants can be remobilised from gravel surfaces during e.g., flooding, dredging, or changes in water chemistry, potentially reintroducing them into the water and impacting water quality and ecosystem.

**Keywords:** quartz; PFOS; PFOA; PFHxA; water pollution

## 1. Introduction

Per- and polyfluoroalkyl substances (PFAS) are a group of synthetic chemicals used for manufacturing of various consumer goods [1]. These compounds also belong to a group of new and emerging and persistent organic pollutants (NEPs and POPs) that may pose significant risks to human health and ecosystem [2,3]. PFAS constitute a class of over 14,000 chemicals with different functionalities including perfluoroalkyl ether acids (PFEA), and fluorotelomer sulphonates (FTS) [4–6]. However, regulations have been set up to restrict the use and production of only a limited number of PFAS such as perfluorooctanoic acid (PFOA) and perfluorooctanesulfonic acid (PFOS) [7] and monitor them in the environment [8,9]. PFAS have been widely observed in diverse environments including surface water [10–12] drinking water [11,13,14], air [15–17] and sediments [18–20].

PFAS can be released into surface waters via several sources e.g., atmospheric deposition [21], landfills [22,23], wastewater treatment plants (WWTPs) [24,25], and accidental release from aqueous film forming foams

**Copyright:** © 2025 by the authors. This is an open access article under the terms and conditions of the Creative Commons Attribution (CC BY) license (https://creativecommons.org/licenses/by/4.0/).
**Publisher's Note**: Scilight stays neutral with regard to jurisdictional claims in published maps and institutional affiliations.

(AFFFs) [25]. Once released into aquatic environments, the presence and long-term impact of PFAS can be challenging to predict. This is due to processes including but not limited to adsorption and desorption of PFAS from the surface of riverine sediments and plants. These processes can also potentially influence the mobility and availability of PFAS in surface waters [26,27].

Several studies have reported the adsorption of various PFAS including PFOA and PFOS, perfluorobutanoic acid (PFBA), perfluorobutanesulfonic acid (PFBS), perfluoropentanoic acid (PFPeA), perfluorononanoic acid (PFNA), perfluoroheptanoic acid (PFHpA), perfluorodecanoic acid (PFDA), perfluorododecanoic acid (PFDoA) and perfluorohexanesulfonic acid (PFHxS) onto sediments [28–31] soils [32–35] and activated carbon [36,37] commonly used for water treatment. PFAS adsorption onto sediments are governed by the compounds diverse characteristics such as carbon chain length, molecular weight (MW), and functional group [34,38]. The characteristics of sediments, such as mineral composition [39,40], surface charge [34], particle size [28,30,41] and organic matter content [30,41,42] have also been reported to influence PFAS adsorption. These characteristics could affect the types of interactions between PFAS and sediments e.g., electrostatic, hydrophobic and ion-exchange interactions, and cause them to exhibit different adsorption capabilities [43]. For instance, several studies have reported hydrophobicity as a main adsorption mechanism for long-chain PFAS [34,42,44,45] whereas the adsorption of short-chain PFAS onto soils have been attributed to electrostatic interactions between the ionic groups of PFAS and soil surfaces [34,46].

Surface waters, such as rivers, are typically associated with the presence of suspended and deposited sediments, consisting of various minerals (e.g., quartz, the second most abundant mineral on Earth) as a result of natural processes e.g., erosion and/or weathering of rocks [47–49]. A study by Cormier et al. [50] demonstrated that in an aqueous solution containing 10 ng/mL of PFOS, large-sized plastics (125–500 μm) can act as a more active adsorption surface for PFAS (PFOS) than fine-sized plastics (4–20 μm). These findings highlight the importance of both material composition and particle size in the efficiency of pollutant adsorption in aquatic environments that could influence contaminant retention and mobility. Most existing research has focused on PFAS adsorption to fine size sediments such as silt and sand (0.1 μm–5 mm) [34,35,39,41,51,52]. However, to the best of our knowledge, the adsorption of PFAS onto medium-sized sediments such as gravel (>8 mm) has not been investigated, despite being predominantly found in or around rivers [53] and its potential to serve as a surface for PFAS adsorption.

Considering recent reports on the occurrence and toxicity of PFAS, including new-generation substitutes, at trace levels [54–56], as well as the lack of information on the adsorption of these compounds onto commonly present in riverine systems medium-sized gravel (>8 mm), further studies are needed to understand the mobility of new-generation PFAS in aquatic environments. Therefore, the aims of this study were (1) to assess the extent of adsorption of 19 PFAS with four different functionalities including PFCA, PFSA, FTS and PFESA, onto medium-sized gravel, and (2) to assess the impact of exposure time and mechanical disturbances on the adsorption of PFAS to riverine gravel. Understanding these factors are needed for the PFAS transport assessment in riverine systems, and mitigating their potential environmental impact.

## 2. Materials and Methods

### *2.1. Materials*

250 mL glass beakers (P/N FB3311, Boro 3.3 Fisherbrand™, Fisher Scientific, Schwerte, Germany); 20 mL Head Space (HS) crimp top glass vials (P/N 12971231, Fisherbrand™, Thermo Scientific, Langerwehe, Germany) with aluminium crimp caps and silicone/PTFE septa (P/N11793127, Fisherbrand™, Thermo Scientific); 10 mL HS glass vials (Chromacol 10-HSV, Thermo Scientific) with metal screw caps (Chromacol 18-MSC, Thermo Scientific) and PTFE septa (Chromacol 18-ST101, Thermo Scientific); luer tapered filters (Iso-Disc PTFE-membrane, 13 mm × 0.45 μm, Thermo Scientific, Shanghai, China); Quartz gravel (8–12 mm) (source Germany, purchased from AK Kin Garden Supplies, Chichester, UK). The chemical composition of the quartz gravel is shown in Table S1.

### *2.2. Chemical Reagents*

Optima™ LC-MS grade: ammonium acetate (Fisher Chemical, Pittsburgh, PA, USA), water (Fisher Chemical, Loughborough, UK) and methanol (Thermo Fisher Scientific, Trinidad and Tobago); HiPerSolv CHROMANORM™ (VWR Chemicals, Leuven, Belgium): methanol (super gradient grade for HPLC) and formic acid (for LC-MS); EPA-533PAR standard mixture consisting of 25 PFAS, including perfluoroalkane sulfonates (C4, C5, C7 linear, C6 & C8 linear and branched isomers), perfluoroalkyl carboxylic acids (C4–C12), 4:2

fluorotelomer sulfonate (4:2 FTS), 6:2 fluorotelomer sulfonate (6:2 FTS), 8:2 fluorotelomer sulfonate (8:2 FTS), perfluoro-3-methoxypropanoic acid (PFMPA), perfluoro-4-methoxybutanoic acid (PFMBA), perfluoro (2-ethoxyethane) sulfonic acid (PFEESA), perfluoro-3,6-dioxaheptanoic acid (3,6-OPFHpA), sodium dodecafluoro-3H-4, 8-dioxanonanoate (NaDONA), hexafluoropropylene oxide dimer acid (HFPO-DA), 9-chlorohexadecafluoro-3-oxanonane-1-sulfonate (9Cl-PF3ONS) & 11-Chloroeicosafluoro-3-oxaundecane-1-sulfonic acid (11Cl-PF3OUdS), at concentrations of 0.5 µg/mL and EPA-533ES $^{13}C$ isotope mixture containing 16 ($^{13}C$) PFAS (including 4:2 fluorotelomer sulfonate $^{13}C_2$ (M2-4:2FTS), 8:2 fluorotelomer sulfonate $^{13}C_2$ (M2-8:2FTS), 6:2 fluorotelomer sulfonate $^{13}C_2$ (M2-6:2FTS), perfluorohexanoic acid $^{13}C_5$ (M5PFHxA), perfluorobutanoic Acid (MPFBA), perfluoropentanoic acid $^{13}C_5$ (M5PFPeA), perfluorononanoic acid $^{13}C_9$ (M9PFNA), perfluorooctanoic acid $^{13}C_8$ (M8PFOA), perfluoroheptanoic acid $^{13}C_4$ (M4PFHpA), (M7PFUdA), perfluorodecanoic acid $^{13}C_6$ (M6PFDA), perfluorododecanoic acid $^{13}C_2$ (MPFDoA), perfluorohexane sulfonic acid $^{13}C_3$ (M3PFHxS), perfluorobutane sulfonic acid $^{13}C_3$ (M3PFBS), perfluorooctane sulfonic acid $^{13}C_8$ (M8PFOS), and hexafluoropropylene oxide dimer acid $^{13}C_3$ (M3HFPO) at 0.5–2.0 µg/mL (Wellington labs, Canada). The full names for the abbreviated n-PFAS (and $^{13}C$ PFAS used as internal standards (ISs)) are detailed in Table S2 of the Supplementary Data.

### *2.3. Sample Preparation and Cleaning Procedures*

Before conducting all experiments, quartz gravel was (1) pre-washed with deionised water, (2) sonicated with methanol for 20 min and (3) rinsed with LC-MS grade water (each step three times). The glass beakers, caps, vials and pipette tips were also washed to reduce contaminants and residues. For example, the glass beakers were sonicated with 150 mL of 70:30 methanol:water (*v*/*v*) solution for 20 min. Pipette tips, vials and caps were pre-washed and rinsed three times each with methanol and LC-MS grade water, respectively.

### *2.4. PFAS Extraction from the Surface of Gravel*

Recent research indicated that when compared to high-density polyethylene and polypropylene, glass material provides lower adsorption losses of long-chain PFAS (e.g., PFOA, PFNA, PFOS, and PFDA) in highly aqueous solutions (i.e., with 100% water) [57–59]. Therefore, beakers made of glass material were selected as vessels for adsorption experiments. Exposed to PFAS gravel was transferred into a prewashed 250 mL glass beaker and extracted with 18 mL of LC-MS Grade methanol (HiPerSlov CHROMANORM™) in an ultrasonic bath for 20 min (10 min × 2 times). The methanolic extracts were filtered using 0.45 µm membrane filters, into prewashed 20 mL crimp top glass vials. The PTFE filters used in this study were previously assessed for PFAS leachability [17]. Purging of PTFE filters with methanolic solution was encouraged to reduce potential PFAS artefacts to a background level. Therefore, in this study, the filters were purged before use with 20 mL of LC-MS Grade methanol. The filtered methanolic gravel extracts were spiked with a mixture of 16 $^{13}C$ PFAS IS at 20 pg/mL for three FTS and 5 pg/mL for other analytes. The spiked extracts were then evaporated to 1 mL under a gentle flow of nitrogen, topped up with 4 mL of water (LC-MS grade), and vortexed to achieve 80:20 water:methanol (*v*/*v*) ratio necessary for online SPE analysis [17]. IS was added prior to the evaporation step, ensuring they account for variations during the latter part of the extraction process, as well as matrix effects and instrumental fluctuations. Recovery experiments by spiking pebbles directly with n-PFAS mixture and $^{13}C$-PFAS provided high recoveries (80.2 ± 3.9% to 109.5 ± 4.1%). The experiments were performed in four replicates.

#### Extraction Efficiency of PFAS from Gravel Surfaces

The extraction efficiency of the method was evaluated by spiking 5.1 g quartz gravel with PFAS analytes (EPA-533PAR mixture containing 25 native PFAS) at 7 pg. The samples were then extracted, reduced by volume and analysed as described in Section 2.3. Following the first extraction, the same quartz gravel was subjected to second and third extraction steps and processed in a similar way as described in Section 2.3. The recovery experiments were performed in four replicates. The recoveries of PFAS were obtained by calculating the ratios of the mass of PFAS recovered at each extraction step to that of the theoretical mass of PFAS (7 pg) spiked onto the gravel. From the single-step extraction procedure, the recoveries of PFAS ranged between 76.6% and 98.9% (Figure S1). The second extraction step has led to additional recoveries of 2.6% to 21.9% (Figure S1). The third extraction step gave negligible recoveries (within the analysis error). Therefore, for all adsorption experiments, the quartz gravel samples were extracted two times.

### *2.5. Adsorption of PFAS onto the Surface of Gravel*

#### 2.5.1. Influence of Exposure Time

The adsorption experiments were performed using a bulk PFAS solution (at 100 pg/mL) in water (Optima™ LC-MS grade). The concentration of 100 pg/mL was chosen based on values reported in the literature (concentrations ranging from µg/L to ng/L) for environmentally relevant scenarios, including contaminated surface waters. [14,25]. Our goal was to select a concentration that was as low as practically feasible, while remaining above the method LODs to ensure reliable quantification across all target compounds. This approach allowed us to simulate realistic environmental conditions without compromising analytical sensitivity. The beakers containing 37.3 g of quartz gravel (covering the bottom of the beaker) were then filled with 25 mL of the PFAS aqueous solution and stored at room temperature (20 °C) for 1, 3 and 7 days. Aliquots (200 µL) collected from each beaker before and after storing for 1, 3 and 7 days, were transferred (using a pipette) into 10 mL HS vials containing 1 mL of methanol to prevent potential PFAS losses onto the walls of the glass vials during the storage [59]. The solutions in the HS vials were capped and stored at 5 °C until analysis. On the day of analysis, all aqueous samples were spiked with $^{13}$C PFAS IS to obtain a concentration 5 pg/mL, followed by addition of 3.8 mL of water to provide 80:20 water:methanol (%, *v*/*v*). The solution in vials was then homogenised by vortex mixing and analysed with the online SPE LC-MS. The experiments were performed in four replicates. The recovery of PFAS in solution after exposure was calculated by comparing the IS corrected chromatographic PFAS peak areas in aqueous solution after exposure ($PA_1$) with the *PFAS* peak in aqueous solution before exposure ($PA_0$):

$$PFAS\ Recovery_{exp} = \left(\frac{PA_1}{PA_0}\right) \times 100 \quad (1)$$

The percentage of *PFAS* adsorbed to gravel was calculated by comparing the mass of *PFAS* obtained from the surface of gravel after each day of exposure ($M_{P1}$) with the calculated mass of *PFAS* in the control solution before exposure 0 ($M_{w0}$):

$$\%\ PFAS\ adsorbed_{exp} = \left(\frac{Mp_1}{Mw_0}\right) \times 100 \quad (2)$$

#### 2.5.2. The Influence of Gravel Disturbance on the PFAS Adsorption

A bulk PFAS solution (at 100 pg/mL) in 100% water (Optima™ LC-MS grade) was used for all experiments. 25 mL of the bulk solution was transferred into 250 mL beakers containing quartz gravel and shaken at 125 rpm for 24 h at room temperature (20 °C). Aliquots (200 µL) collected from beakers before and after shaking for 24 h were transferred into a 10 mL HS glass vials. The solutions in the vials were topped up with 1mL methanol and 3.8 mL water and spiked with IS to make 5 pg/mL and analysed with online SPE LC-MS. The experiments were repeated four times. The recovery of *PFAS* in solution after shaking was calculated from the ratio of the IS corrected chromatographic PFAS peak areas after shaking for 24 h ($Ps_1$) and those before shaking ($Ps_0$):

$$PFAS\ Recovery_{shak} = \left(\frac{Ps_1}{PS_0}\right) \times 100 \quad (3)$$

The percentage of *PFAS* adsorbed to gravel was calculated by comparing the mass of *PFAS* obtained from the surface of gravel with/without shaking for 24 h ($Mps_1$) with the calculated mass of *PFAS* in the control solution before shaking for 24 h ($Mws_0$):

$$\%\ PFAS\ adsorbed_{shak} = \left(\frac{Mps_1}{Mws_0}\right) \times 100 \quad (4)$$

### *2.6. Analytical Method*

Liquid Chromatography (LC) Q Exactive™ Focus Hybrid Quadrupole-Orbitrap™ MS (Thermo Fisher, Bremen, Germany) was used to analyse the samples. The PFAS analysis was conducted using the online Solid Phase Extraction (SPE) LCMS method adapted from Kourtchev et al. [17] and Folorunsho et al. [12]. The on-line solid phase extraction (SPE) procedure used in this study is described in detail in Kourtchev et al. [17]. In summary, samples were introduced via a 1 mL high-volume injection loop and directed onto a pre-concentration column by the loading pump (Thermo Scientific VF-P10-A), using 0.1% formic acid in water at a flow rate of 1 mL/min. Once the enrichment phase was complete, a 6-port autosampler valve was triggered to initiate the analytical sequence. The elution pump (Thermo Scientific VF-P20-A) then applied a gradient elution using two mobile phases: (A) 2 mM ammonium acetate in 10% methanol, and (B) pure methanol, delivered at a rate of 300 µL/min.

This gradient passed through both the pre-concentration and analytical columns as outlined by Kourtchev et al. [17]. The SPE and analytical columns used were Thermo Scientific™ Hypersil GOLD aQ (20 × 2.1 mm, 12 µm) and Waters® CORTECS C18 (90 Å, 100 × 2.1 mm, 2.7 µm), respectively. The analytical column was maintained at 35 °C throughout the 22-min run time.

### *2.7. Quality Assurance (QA) and Quality Control (QC)*

Several steps were implemented to ensure the reliability and accuracy of the sample analysis. To prevent PFAS accumulation in the Orbitrap LC-MS, the system was continuously flushed overnight using mobile phases A: 2 mM ammonium acetate in water with 10% methanol, and B: 100% methanol at a flow rate of 0.3 mL/min [17] before each batch of analysis. Mass calibration of the Orbitrap MS was performed daily in the negative ionisation mode to ensure mass accuracy within an acceptance limit of ±1 ppm. Prior to analysis of each batch, five system ("zero volume") blanks and three 80:20 (*v*/*v*) water:methanol blanks were analysed to check for potential PFAS accumulation in the system. Additionally, "zero-volume" blanks were analysed between samples and at the end of the sequence to control a potential PFAS carryover. The "zero-volume" blanks and 80:20 water:methanol blanks gave <LOQ values for PFAS.

System suitability tests (SST) were conducted prior to each sample analysis batch to ensure an optimal system performance, by checking the following parameters, i.e., retention time, peak area and height, and chromatographic resolution. Specifically, water:methanol (80:20 *v*/*v*) solutions containing 25 PFAS and 16 [$^{13}$C] labelled PFAS were prepared (see Section 2.2 of main text for details of the PFAS mix used) on a day of analysis and analysed using an Orbitrap LC-MS. The concentrations of 25 PFAS were at 7.5 pg/mL.

### *2.8. Statistical Analysis*

The data were analysed using one-way ANOVA in Excel (Version 2310) and IBM SPSS (Version 28.0), with results presented in Tables S4 and S5.

The dataset comprised four conditions with four replicates each (total n = 16 observations), meeting the minimal sample size recommended for one-way ANOVA (n > 15) [60]. However, since ANOVA assumes normally distributed residuals, a particularly important consideration with small sample sizes, non-parametric alternatives were also applied. Specifically, the Kruskal–Wallis test, followed by Dunn's post hoc test, was used to assess statistically significant differences ($p < 0.05$).

## 3. Results and Discussion

### *3.1. PFAS Adsorption onto Gravel Surfaces after Exposure to Contaminated Water*

The percentage of PFAS adsorbed onto the surface of riverine quartz gravel from contaminated water after exposure for 1, 3 and 7 days are shown in Figure 1. Regardless of the PFAS functional group, the extent of adsorption onto quartz gravel showed a dependence on the compound's carbon chain length. For instance, among the target compounds, short-chain PFAS, i.e., PFPeA (2.6 ± 0.2%, after 1 day) and medium-chain PFAS, i.e., PFHxA (2.8 ± 0.3% and 1.9 ± 0.2%, after 3 and 7 days, respectively) showed the lowest adsorption onto gravel. Meanwhile, the long-chain PFAS such as PFOS, 9 Cl- PF3ONS, 8:2 FTS, PFDA, showed greater adsorption onto gravel. Several studies have reported an increase in the adsorption of PFAS onto solids with increasing carbon chain length [43,51]. For instance, Chen et al. [43] reported the higher adsorption of long-chain PFAS (PFDA, PFNA and PFOS) onto sediments of the urban reservoir compared to medium-chain PFAS (PFHxS and PFOA). Fabregat-Palau et al. [51] also reported increasing adsorption of PFAS (PFHxA, PFNA, PFOS, PFDoA, PFOA, PFBS, PFBA, and PFHxS) onto soils with increasing carbon chain length. Such observation was attributed to interactions between the hydrophobic moieties of long-chain PFAS and those of the studied solids (soils and sediments) [43,51].

Our results align with findings from other studies which reported that short-chain PFAS may slowly occupy active sites on the surface of adsorbents with large granules than long-chain PFAS [61–63]. Therefore, PFAS may potentially desorb (remobilise) from the surface of gravel into water with time. Additionally, the extent of adsorption to quartz gravel was affected by the PFAS functional group (Figure 1). Among the tested PFAS, PFCA showed the lowest adsorption onto gravel, compared to PFEA, PFSA and FTS homologue (C5–C8) (Table S3). For instance, despite having the same number of carbons, PFOA (C8) had a lower adsorption capacity compared to 9 Cl-PF3ONS (C8), PFOS (C8) and 6:2 FTS (C8). The influence of functional groups on the PFAS adsorption to sediments have been attributed to the smaller size of the carboxylic functional group compared to the sulfonate which results in less hydrophobicity of PFCAs compared to PFSA [35]. The one-way ANOVA results indicated

significant difference ($p < 0.05$) between the fractions of PFAS adsorbed onto gravel after exposure for 1, 3 and 7 days except for PFOA, PFNA, PFOS and 9 Cl-PF3ONS (Tables S4 and S5).

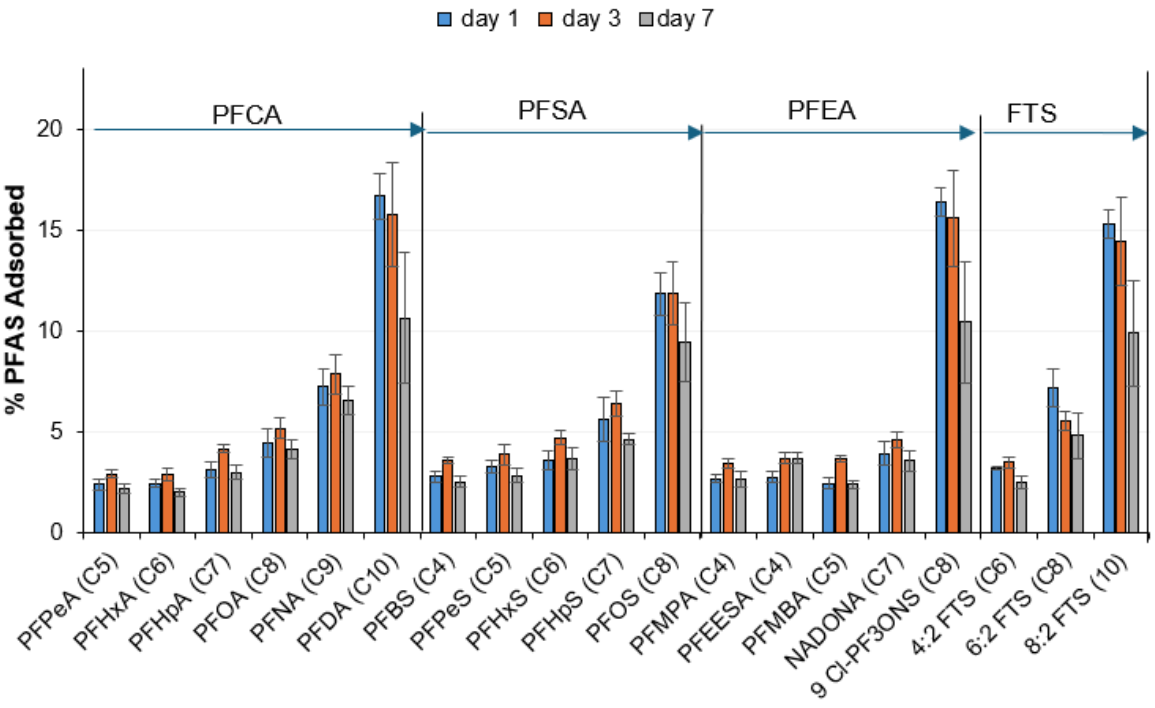


**Figure 1.** The fraction of PFAS adsorbed onto medium-sized gravel after exposure for 1 (blue bars), 3 (red bars) and 7 days (grey bars) in contaminated water. The error bars correspond to standard deviation values from four experimental replicates.

It should be noted that there was a decrease in the recovery of PFAS, especially long-chain ones, in contaminated water samples after 7-day exposure while those of the short-and medium-chain PFAS remained unchanged (Figure S2). The fraction of long-chain PFAS adsorbed onto the gravel was lower compared to the overall loss of analytes from the PFAS-enriched aqueous solution. This may be due to potential adsorptive competition between the gravel and the glass walls of the containers used to carry out experiments. Although the adsorptive losses of long-chain PFAS to glass have been reported to be lower than other commonly used laboratory materials e.g., polypropylene [57–59], the glass may still possess similar challenges for long-chain PFAS. Therefore, using these materials may not be appropriate for studying long-chain PFAS in highly aqueous solutions over an extended period.

The PFAS partition coefficient (Kd) obtained in our study (Table S6) are consistent with other studies reporting the adsorption of PFAS onto various soil particles of smaller sizes [41,51,64]. For instance, Fabregat-Palau et al. [51] reported Kd values ranging from 2.4 to 21 L/Kg, 2.6 to 38 L/Kg, 11 to 128 L/Kg and 32 to 295 L/Kg for the adsorption of PFHxS, PFOA PFNA and PFOS, respectively, onto soils (clay and silt) with particle sizes <2 µm. Similarly, Li et al. [65] reported Kd ranges of 1.4–224 L/Kg, 0.1–85 L/Kg, 0.4–6.3 L/Kg for the adsorption of PFOS, PFOA and PFHxS, respectively onto soils. However, the Kd values from our study were 2.7, 13.7, 16.8, 25.0, 25.8, 52.9, 62.9 and 106.1 times greater for 6:2 FTS, PFOS, PFHxA, PFOA, PFHxS, PFBS, PFPeS and PFPeA, respectively, than those determined for AFFF-contaminated soils in the study by Hubert et al. [41], suggesting higher adsorption capacity of the medium quartz gravel used in our study. The lower Kd observed in the study by Hubert et al. [41] is likely due to the size and content of mineral present in the studied soils.

The extent of PFAS adsorption could also potentially be influenced by the mineral composition of the gravel. Solids containing alumina ($Al_2O_3$) and iron oxide ($Fe_2O_3$) have been reported to possess more active sites for adsorption than silica ($SiO_2$) [39,40]. Miao et al. [33] demonstrated that soils with higher content of alumina and iron oxide favoured the adsorption of PFOA compared to those with higher silica content. The quartz gravel used in our study contained a higher percentage of silica (97.5%) compared to alumina (1.3%) and iron oxide (0.2%) (Table S1). This could also potentially explain the difference between our results and those which reported higher adsorption of PFAS. The Kd values determined in our study (Table S6) are consistent with those reported by Zhao et al. [66] for the adsorption of PFBS (0.6 L/Kg), PFHpA (0.6 L/Kg), PFOA (3.4 L/Kg), PFHxS (3.7 L/Kg), PFNA (11.7 L/Kg) and PFOS (24.5 L/Kg) onto aquifer materials with high silica content (89.7%). It should be noted that

the degree of PFAS adsorption onto riverine quartz gravel may be impacted by the range of environmental parameters such as water temperature, pH and salinity and PFAS concentrations [34,43], which are outside the scope of this study.

### *3.2. PFAS Sorption onto Gravel after Shaking for 24 h*

The fraction of PFAS adsorbed onto medium-sized quartz from contaminated solution after and without shaking for 24 h are shown in Figure 2. The results show a trend of the adsorption of studied PFAS with increasing carbon-chain length, after shaking (up to 12.5 ± 1.7%) and without shaking (up to 16.7 ± 1.1%). Moreover, the extent of adsorption was found to be affected by the PFAS functional group. Among the tested PFAS, PFCA showed the lowest adsorption onto gravel, compared to PFEA, PFSA and FTS homologue (C5-C8) (Table S7). No statistical differences were observed between the fractions of PFAS adsorbed onto gravel after shaking and without shaking for 24 h ($p > 0.05$) except for 9 Cl-PF3OUdS, 8:2 FTS, PFDA ($p < 0.05$) (Table S8).

Lower adsorption losses of 9 Cl-PF3OUdS, 8:2 FTS and PFDA onto gravel was observed after shaking which can potentially be explained by agitation disrupting the adsorption equilibrium [67]. Shaking can lead to enhanced desorption of adsorbed molecules or prevent the effective attachment of adsorbates to the adsorbent by creating a more dynamic environment [68,69]. In our study, sample shaking may have hindered the formation of stable PFAS-gravel interactions, which are typically favoured under static conditions (without shaking), where molecules have more time to settle and interact with the surface of gravel.

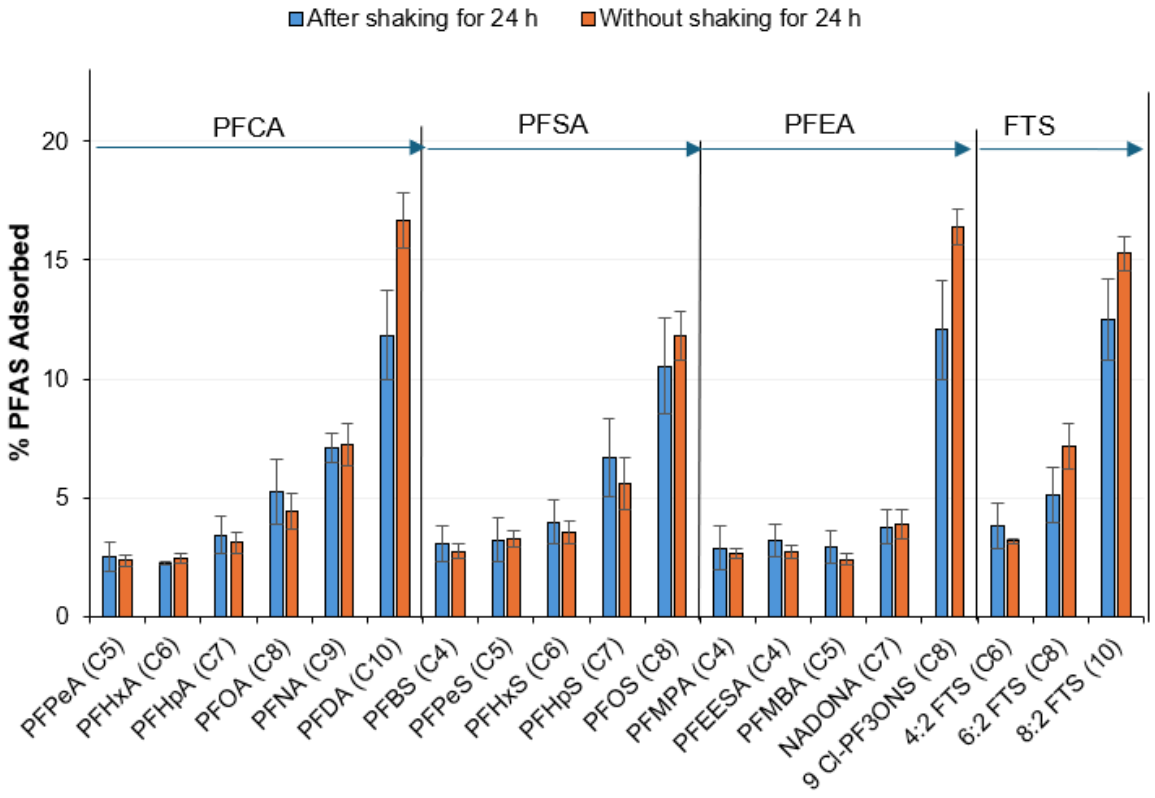


**Figure 2.** The fraction PFAS adsorbed (%) onto the surface of gravel after shaking (blue bars) and without shaking (red bars) for 24 h. The error bars correspond to standard deviation values from four experimental replicates.

## 4. Conclusions

The adsorption of 19 PFAS, including perfluoro-carboxylic acids (PFCA, C4–C10), perfluoro-sulfonic acids (PFSA, C4–C8), PFEA (C4–C8), and FTS (C6–C10), onto medium-sized quartz gravel was examined following exposure to a contaminated solution for 1, 3, and 7 days, with additional mechanical disturbance (i.e., shaking).Our results indicate that the level of PFAS adsorption to medium-sized gravel is dependent on the carbon chain length and functional group of the analyte. Long-chain PFAS, including new-generation 9 Cl-PF3ONS and 8:2 FTS, adsorbed to the greatest extent onto the gravel, while PFCAs showed the lowest adsorption capacity compared to other functional groups with corresponding carbon chain length. Our results suggest that PFAS may adsorb to medium-sized quartz gravel in contaminated water within 24 h. The disturbance (i.e., shaking) of gravel and

contaminated water showed no statistically significant difference in the extent of adsorption for most PFAS onto gravel, except for a few long-chain PFAS namely 9 Cl-PF3OUdS, 8:2 FTS and PFDA. This potentially suggests that relevant processes in natural aquatic systems such as tidal flows or mechanical disturbances, may likely influence the adsorption of these long-chain PFAS onto the surface of medium-sized quartz gravel.

To the best of our knowledge, this is the first study that investigates the adsorption of new-generation PFAS onto riverine medium-sized quartz gravel. It provides relevant information for the early evaluation of short-, medium- and long-chain PFAS in contaminated water. These findings contribute to understanding PFAS mobility in aquatic environments, supporting efforts to monitor PFAS in surface waters and predict their short- and long-term environmental impacts.

## Supplementary Materials

The additional data and information can be downloaded at: https://media.sciltp.com/articles/others/250822140049512 5/ECCS-1324-supplementary_revised.pdf. Figure S1: PFAS recoveries after first, second and third filter extraction steps. Figure S2: Amount of PFAS (%) in solutions after exposure for 1, 3 and 7 days in contaminated water. Figure S3: Amount of PFAS (%) in the aqueous solutions after shaking, and without shaking for 24 h. Table S1: Chemical composition of quartz pebbles used in our study. Table S2: PFAS analytes and corresponding isotopically labelled standards. Table S3: Non-parametric statistical comparison between adsorption of different PFAS functional groups onto gravels after exposure (up to 7 days). Table S4: Statistical comparison of the amount of PFAS (%) adsorbed to pebbles after exposure for 1, 3 and 7 days. Table S5: Nonparametric statistical comparison of amount of PFAS (%) adsorbed to pebbles after exposure for 1, 3 and 7 days. Table S6: Partition Coefficient for PFAS adsorption to quartz aggregates after exposure for 1, 3 and 7 days. Table S7: Non-parametric statistical comparison for PFAS adsorption onto aggregates after shaking and without shaking for 24 h. Table S8: Statistical comparison of the amount of PFAS (%) adsorbed to pebbles after exposure with shaking and without shaking for 24 h.

## Author Contributions

O.F.: conceptualisation, methodology, investigation, resources, data curation, writing—review & editing, visualisation. A.B.: co-conceptualisation, resources, review & editing, co-supervision. I.K.: conceptualisation, methodology, resources, writing—review & editing, supervision, project administration. All authors have read and agreed to the published version of the manuscript.

## Funding

Research was supported by Centre for Agroecology Water and Resilience (CAWR), Coventry University.

## Data Availability and Statistical Reporting

Data will be available upon request. The statistical analysis results are provided in the SI.

## Acknowledgements

The authors gratefully acknowledge Richard Collins (laboratory technician) at the Centre for Agroecology, Water and Resilience (CAWR), Coventry University for their technical support.

## Conflict of Interest Disclosure

The authors declare they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

## References

1. Glüge, J.; Scheringer, M.; Cousins, I.T.; et al. An overview of the uses of per- and polyfluoroalkyl substances (PFAS). *Environ. Sci. Process Impacts* **2020**, *22*, 2345–2373. https://doi.org/10.1039/D0EM00291G.
2. Fenton, S.E.; Ducatman, A.; Boobis, A.; et al. Per-and polyfluoroalkyl substance toxicity and human health review: Current state of knowledge and strategies for informing future research. *Environ. Toxicol. Chem.* **2021**, *40*, 606–630. https://doi.org/10.1002/etc.4890
3. Banyoi, S.M.; Porseryd, T.; Larsson, J.; et al. The effects of exposure to environmentally relevant PFAS concentrations for aquatic organisms at different consumer trophic levels: Systematic review and meta-analyses. *Environ. Pollut.* **2022**, *315*, 120422. https://doi.org/10.1016/J.ENVPOL.2022.120422.
4. Kwiatkowski, C.F.; Andrews, D.Q.; Birnbaum, L.S.; et al. Scientific basis for managing PFAS as a chemical class. *Environ. Sci. Technol. Lett.* **2020**, *7*, 532–543. https://doi.org/10.1021/acs.estlett.0c00255.

5. US EPA. PFAS Structures in DSSTox. 2022. Available online: https://comptox.epa.gov/dashboard/chemical-lists/PFASSTRUCTV5 (accessed on 30 January 2025).
6. Ackerman Grunfeld, D.; Gilbert, D.; Hou, J.; et al. Underestimated burden of per- and polyfluoroalkyl substances in global surface waters and groundwaters. *Nat. Geosci.* **2024**, *17*, 340–346. https://doi.org/10.1038/s41561-024-01402-8.
7. Stockholm Convention. 2024. All POPs Listed in the Stockholm Convention. Available online: https://www.pops.int/TheConvention/ThePOPs/AllPOPs/tabid/2509/Default.aspx (accessed on 30 January 2025).
8. UK Drinking Water Inspectorate (UKDWI). Guidance on the Water Supply (Water Quality) Regulations 2016 (as Amended) for England and Water Supply (Water Quality) Regulations 2018 for Wales Specific to PFAS (per- and Polyfluoroalkyl Substances) in Drinking Water. 2025. Available online: https://dwi-production-files.s3.eu-west-2.amazonaws.com/wp-content/uploads/2025/03/24141825/DWI_PFAS-Guidance_Mar_2025.pdf (accessed on 7 July 2025).
9. UK Drinking Water Inspectorate (UKDWI). Guidance on the Water Supply (Water Quality) Regulations 2016 Specific to PFOS (Perfluorooctane Sulphonate) and PFOA (Perfluorooctanoic Acid) Concentrations in Drinking Water. 2021. Available online: https://cdn.dwi.gov.uk/wp-content/uploads/2021/01/12110137/PFOS-PFOA-guidance-2021.pdf (accessed on 7 July 2025).
10. Gago-Ferrero, P.; Gros, M.; Ahrens, L.; et al. Impact of on-site, small and large scale wastewater treatment facilities on levels and fate of pharmaceuticals, personal care products, artificial sweeteners, pesticides, and perfluoroalkyl substances in recipient waters. *Sci. Total Environ.* 2017, 601–602, 1289–1297. https://doi.org/10.1016/J.SCITOTENV.2017.05.258.
11. Ciofi, L.; Renai, L.; Rossini, D.; et al. Applicability of the direct injection liquid chromatographic tandem mass spectrometric analytical approach to the sub-ng L−1 determination of perfluoro-alkyl acids in waste, surface, ground and drinking water samples. *Talanta* **2018**, *176*, 412–421. https://doi.org/10.1016/J.TALANTA.2017.08.052.
12. Folorunsho, O.; Bogush, A.; Kourtchev, I. A new on-line SPE LC-HRMS method for simultaneous analysis of selected emerging contaminants in surface waters. *Anal. Methods* **2023**, *15*, 284–296. https://doi.org/10.1039/D2AY01574A.
13. Sharma, B.M.; Bharat, G.K.; Tayal, S.; et al. Perfluoroalkyl substances (PFAS) in river and ground/drinking water of the Ganges River basin: Emissions and implications for human exposure. *Environ. Pollut.* **2016**, *208*, 704–713. https://doi.org/10.1016/J.ENVPOL.2015.10.050.
14. Crone, B.C.; Speth, T.F.; Wahman, D.G.; et al. Occurrence of per- and polyfluoroalkyl substances (PFAS) in source water and their treatment in drinking water. *Crit. Rev. Environ. Sci. Technol.* **2019**, *49*, 2359–2396. https://doi.org/10.1080/10643389.2019.1614848.
15. Wong, F.; Hung, H.; Dryfhout-Clark, H.; et al. Time trends of persistent organic pollutants (POPs) and Chemicals of Emerging Arctic Concern (CEAC) in Arctic air from 25 years of monitoring. *Sci. Total Environ.* **2021**, *775*, 145109. https://doi.org/10.1016/J.SCITOTENV.2021.145109.
16. Zhou, J.; Baumann, K.; Mead, R.N.; et al. PFOS dominates PFAS composition in ambient fine particulate matter (PM2.5) collected across North Carolina nearly 20 years after the end of its US production. *Environ. Sci. Process Impacts* **2021**, *23*, 580–587. https://doi.org/10.1039/d0em00497a.
17. Kourtchev, I.; Hellebust, S.; Heffernan, E.; et al. A new on-line SPE LC-HRMS method for the analysis of perfluoroalkyl and polyfluoroalkyl substances (PFAS) in PM2.5 and its application for screening atmospheric particulates from Dublin and Enniscorthy, Ireland. *Sci. Total Environ.* **2022**, *835*, 155496. https://doi.org/10.1016/J.SCITOTENV.2022.155496.
18. Qi, Y.; Huo, S.; Xi, B.; et al. Spatial distribution and source apportionment of PFASs in surface sediments from five lake regions, China. *Sci. Rep.* **2016**, *6*, 22674. https://doi.org/10.1038/srep22674.
19. Ahmadireskety, A.; Da Silva, B.F.; Townsend, T.G.; et al. Evaluation of extraction workflows for quantitative analysis of per- and polyfluoroalkyl substances: A case study using soil adjacent to a landfill. *Sci. Total Environ.* **2021**, *760*, 143944. https://doi.org/10.1016/J.SCITOTENV.2020.143944.
20. Chirikona, F.; Quinete, N.; Gonzalez, J.; Mutua, G.; et al. Occurrence and distribution of per- and polyfluoroalkyl substances from multi-industry sources to water, sediments and plants along Nairobi River basin, Kenya. *Int. J. Environ. Res. Public Health* **2022**, *19*, 8980. https://doi.org/10.3390/ijerph19158980.
21. Pfotenhauer, D.; Sellers, E.; Olson, M.; et al. PFAS concentrations and deposition in precipitation: An intensive 5-month study at national atmospheric deposition program—National trends sites (NADP-NTN) across Wisconsin, USA. *Atmos. Environ.* **2022**, *291*, 119368. https://doi.org/10.1016/J.ATMOSENV.2022.119368.
22. Hamid, H.; Li, L.Y.; Grace, J.R. Review of the fate and transformation of per- and polyfluoroalkyl substances (PFASs) in landfills. *Environ. Pollut.* **2018**, *235*, 74–84. https://doi.org/10.1016/J.ENVPOL.2017.12.030.
23. Zhang, M.; Zhao, X.; Zhao, D.; et al. Poly- and perfluoroalkyl substances (PFAS) in landfills: Occurrence, transformation and treatment. *J. Waste Manag.* **2023**, *155*, 162–178. https://doi.org/10.1016/J.WASMAN.2022.10.028.
24. Houtz, E.F.; Sutton, R.; Park, J.S.; et al. Poly- and perfluoroalkyl substances in wastewater: Significance of unknown precursors, manufacturing shifts, and likely AFFF impacts. *Water Res.* **2016**, *95*, 142–149. https://doi.org/10.1016/J.WATRES.2016.02.055.
25. Kurwadkar, S.; Dane, J.; Kanel, S.R.; et al. Per- and polyfluoroalkyl substances in water and wastewater: A critical review of their global occurrence and distribution. *Sci. Total Environ.* **2022**, *809*, 151003. https://doi.org/10.1016/J.SCITOTENV.2021.151003.

26. Borthakur, A.; Wang, M.; He, M.; et al. Perfluoroalkyl acids on suspended particles: Significant transport pathways in surface runoff, surface waters, and subsurface soils. *J. Hazard. Mater.* **2021**, *417*, 126159. https://doi.org/10.1016/J.JHAZMAT.2021.126159.
27. Balgooyen, S.; Remucal, C.K. Tributary loading and sediment desorption as sources of pfas to receiving waters. *ACS ES&T Water* **2022**, *2*, 436–445. https://doi.org/10.1021/acsestwater.1c00348.
28. Zhao, Y.; Min, X.; Xu, S.; et al. Adsorption of per- and polyfluoroalkyl substances (PFAS) by aquifer materials: The important role of dolomite. *Environ. Sci. Technol. Lett.* **2023**, *10*, 931–936. https://doi.org/10.1021/acs.estlett.3c00583.
29. Harfmann, J.L.; Tito, K.; Kieber, R.J.; et al. Sorption of hexafluoropropylene oxide dimer acid to sediments: Biogeochemical implications and analytical considerations. *ACS Earth Space Chem.* **2021**, *5*, 580–587. https://doi.org/10.1021/acsearthspacechem.0c00323.
30. Fagbayigbo, B.O.; Opeolu, B.O.; Fatoki, O.S.; et al. Sorption and partitioning of perfluorooctanoic acid (PFOA) and perfluorooctane sulfonate (PFOS) onto sediments of Diep and Plankenburg river systems Western Cape, South Africa. *Environ. Technol. Innov.* **2022**, *25*, 102110. https://doi.org/10.1016/J.ETI.2021.102110.
31. Reif, D.; Zoboli, O.; Wolfram, G.; et al. Pollutant source or sink? Adsorption and mobilization of PFOS and PFOA from sediments in a large shallow lake with extended reed belt. *J. Environ. Manag.* **2022**, *320*, 115871. https://doi.org/10.1016/J.JENVMAN.2022.115871.
32. Milinovic, J.; Lacorte, S.; Vidal, M.; et al. Sorption behaviour of perfluoroalkyl substances in soils. *Sci. Total Environ.* **2015**, *511*, 63–71. https://doi.org/10.1016/j.scitotenv.2014.12.017.
33. Miao, Y.; Guo, X.; Dan Peng Fan, T.; et al. Rates and equilibria of perfluorooctanoate (PFOA) sorption on soils from different regions of China. *Ecotoxicol. Environ. Saf.* **2017**, *139*, 102–108. https://doi.org/10.1016/J.ECOENV.2017.01.022.
34. Nguyen, T.M.H.; Bräunig, J.; Thompson, K.; et al. Influences of chemical properties, soil properties, and solution pH on soil-water partitioning coefficients of per- and polyfluoroalkyl substances (PFASs). Environ. *Sci. Technol.* **2020**, *54*, 15883–15892.
35. Oliver, D.P.; Li, Y.; Orr, R.; et al. Sorption behaviour of per- and polyfluoroalkyl substances (PFASs) in tropical soils. *Environ. Pollut.* **2020**, *258*, 113726. https://doi.org/10.1016/J.ENVPOL.2019.113726.
36. Son, H.; Kim, T.; Yoom, H.S.; et al. The adsorption selectivity of short and long per-and polyfluoroalkyl substances (PFASs) from surface water using powder-activated carbon. *Water* **2020**, *12*, 3287. https://doi.org/10.3390/w12113287.
37. Niarchos, G.; Georgii, L.; Ahrens, L.; et al. A systematic study of the competitive sorption of per- and polyfluoroalkyl substances (PFAS) on colloidal activated carbon. *Ecotoxicol Environ Saf* **2023**, *264*, 115408. https://doi.org/10.1016/J.ECOENV.2023.115408.
38. Lyu, X.; Xiao, F.; Shen, C.; et al. Per- and polyfluoroalkyl substances (PFAS) in subsurface environments: Occurrence, fate, transport, and research prospect. *Rev. Geophys.* 2022, 60, e2021RG000765. https://doi.org/10.1029/2021RG000765.
39. Johnson, R.L.; Anschutz, A.J.; Smolen, J.M.; et al. The adsorption of perfluorooctane sulfonate onto sand, clay, and iron oxide surfaces. *J. Chem. Eng. Data* **2007**, *52*, 1165–1170. https://doi.org/10.1021/je060285g.
40. Hellsing, M.S.; Josefsson, S.; Hughes, A.V.; et al. Sorption of perfluoroalkyl substances to two types of minerals. *Chemosphere* **2016**, *159*, 385–391. https://doi.org/10.1016/J.CHEMOSPHERE.2016.06.016.
41. Hubert, M.; Arp, H.P.H.; Hansen, M.C.; et al. Influence of grain size, organic carbon and organic matter residue content on the sorption of per- and polyfluoroalkyl substances in aqueous film forming foam contaminated soils–Implications for remediation using soil washing. *Sci. Total Environ.* **2023**, *875*, 162668. https://doi.org/10.1016/J.SCITOTENV.2023.162668
42. Higgins, C.P.; Luthy, R.G. Sorption of perfluorinated surfactants on sediments. *Environ. Sci. Technol.* **2006**, *40*, 7251–7256. https://doi.org/10.1021/es061000n.
43. Chen, H.; Reinhard, M.; Nguyen, V.T.; et al. Reversible and irreversible sorption of perfluorinated compounds (PFCs) by sediments of an urban reservoir. *Chemosphere* **2016**, *144*, 1747–1753. https://doi.org/10.1016/j.chemosphere.2015.10.055.
44. Du, Z.; Deng, S.; Bei, Y.; et al. Adsorption behavior and mechanism of perfluorinated compounds on various adsorbents—A review. *J. Hazard. Mater.* **2014**, *274*, 443–454. https://doi.org/10.1016/J.JHAZMAT.2014.04.038
45. Sörengård, M.; Franke, V.; Tröger, R.; et al. Losses of poly- and perfluoroalkyl substances to syringe filter materials. *J. Chromatogr. A* **2020**, *1609*, 460430. https://doi.org/10.1016/J.CHROMA.2019.460430.
46. Brusseau, M.L. Differential sorption of short-chain versus long-chain anionic per- and poly-fluoroalkyl substances by soils. *Environments* **2023**, *10*, 175. https://doi.org/10.3390/environments10100175.
47. Owens, P.N.; Batalla, R.J.; Collins, A.J.; et al. Fine-grained sediment in river systems: Environmental significance and management issues. River Res. *Appl.* **2005**, *21*, 693–717. https://doi.org/10.1002/rra.878.
48. Neely, A.B.; DiBiase, R.A. Drainage Area, Bedrock Fracture Spacing, and Weathering Controls on Landscape-Scale Patterns in Surface Sediment Grain Size. *J. Geophys. Res. Earth Surf.* **2020**, *125*, e2020JF005560. https://doi.org/10.1029/2020JF005560.
49. Owens, P.N. Soil erosion and sediment dynamics in the Anthropocene: A review of human impacts during a period of rapid global environmental change. *J. Soils Sediments* **2020**, *20*, 4115–4143. https://doi.org/10.1007/s11368-020-02815-9/Published.

50. Cormier, B.; Borchet, F.; Kärrman, A.; et al. Sorption and desorption kinetics of PFOS to pristine microplastic. *Environ. Sci. Pollut. Res. Int.* **2022**, *29*, 4497–4507. https://doi.org/10.1007/s11356-021-15923-x/.
51. Fabregat-Palau, J.; Vidal, M.; Rigol, A. Modelling the sorption behaviour of perfluoroalkyl carboxylates and perfluoroalkane sulfonates in soils. *Sci. Total Environ.* **2021**, *801*, 149343. https://doi.org/10.1016/J.SCITOTENV.2021.149343.
52. Campos-Pereira, H.; Kleja, D.B.; Ahrens, L.; et al. Effect of pH, surface charge and soil properties on the solid–solution partitioning of perfluoroalkyl substances (PFASs) in a wide range of temperate soils. *Chemosphere* **2023**, *321*, 138133. https://doi.org/10.1016/J.CHEMOSPHERE.2023.138133.
53. Mcevoy, F.; Steadman, E.J.; Harrison, D.J.; et al. Yorkshire and the Humber Region: Sand and Gravel Resources and Environmental Assets. British Geological Survey Commissioned Report, CR/04/216N. 39p. 2004. Available online: https://nora.nerc.ac.uk/id/eprint/509795/1/CR04216N.pdf (accessed on 30 January 2025).
54. Zheng, P.; Liu, M.; Yin, H.; et al. Analysis of 58 poly-/perfluoroalkyl substances and their occurrence in surface water in a high-technology industrial park. *Environ. Pollut.* **2020**, *267*, 115381. https://doi.org/10.1016/J.ENVPOL.2020.115381.
55. Adeogun, A.O.; Chukwuka, A.V.; Ibor, O.R.; et al. Occurrence, bioaccumulation and trophic dynamics of per- and polyfluoroalkyl substances in two tropical freshwater lakes. *Environ. Pollut.* **2024**, *346*, 123575. https://doi.org/10.1016/J.ENVPOL.2024.123575.
56. Zarębska, M.; Bajkacz, S.; Hordyjewicz-Baran, Z. Assessment of legacy and emerging PFAS in the Oder River: Occurrence, distribution, and sources. *Environ. Res.* **2024**, *251*, 118608. https://doi.org/10.1016/J.ENVRES.2024.118608.
57. Lath, S.; Knight, E.R.; Navarro, D.A.; et al. Sorption of PFOA onto different laboratory materials: Filter membranes and centrifuge tubes. *Chemosphere* **2019**, *222*, 671–678. https://doi.org/10.1016/J.CHEMOSPHERE.2019.01.096.
58. Zenobio, J.E.; Salawu, O.A.; Han, Z.; et al. Adsorption of per- and polyfluoroalkyl substances (PFAS) to containers. *J. Hazard Mater. Adv.* **2022**, *7*, 100130. https://doi.org/10.1016/j.hazadv.2022.100130.
59. Folorunsho, O.; Kizhakkethil, J.P.; Bogush, A.; et al. Effect of short-term sample storage and preparatory conditions on losses of 18 per- and polyfluoroalkyl substances (PFAS) to container materials. *Chemosphere* **2024**, *363*, 142814. https://doi.org/10.1016/J.CHEMOSPHERE.2024.142814.
60. Morgan, C.J. Use of proper statistical techniques for research studies with small samples. *Am. J. Physiol. Lung Cell Mol. Physiol.* **2017**, *313*, 5. https://doi.org/10.1152/ajplung.00238.2017.
61. Vu, C.T.; Wu, T. Adsorption of short-chain perfluoroalkyl acids (PFAAs) from water/wastewater. *Environ. Sci.* **2020**, *6*, 2958–2972. https://doi.org/10.1039/d0ew00468e.
62. Helbling, D.E.; Dichtel, W.R. Final Report: Rational Design and Implementation of Novel Polymer Adsorbents for Selective Uptake of Pfas from Groundwater. SERDP Project, ER18-1026. 2022. Available online: https://apps.dtic.mil/sti/trecms/pdf/AD1187004.pdf (accessed on 30 January 2025).
63. Yin, Y.; Fan, C.; Cheng, L.; et al. Adsorption of perfluoroalkyl substances on deep eutectic solvent-based amorphous metal-organic framework: Structure and mechanism. *Environ. Res.* **2024**, *248*, 118261. https://doi.org/10.1016/J.ENVRES.2024.118261.
64. Zhang, R.; Yan, W.; Jing, C. Mechanistic study of PFOS adsorption on kaolinite and montmorillonite. *Colloids Surf. A Physicochem. Eng. Asp.* **2014**, *462*, 252–258. https://doi.org/10.1016/J.COLSURFA.2014.09.019.
65. Li, Y.; Oliver, D.P.; Kookana, R.S. A critical analysis of published data to discern the role of soil and sediment properties in determining sorption of per and polyfluoroalkyl substances (PFASs). Sci. *Total Environ.* **2018**, *628–629*, 110–120. https://doi.org/10.1016/J.SCITOTENV.2018.01.167.
66. Zhao, Y.; Min, X.; Xu, S.; et al. Adsorption of per- and polyfluoroalkyl substances (PFAS) by aquifer materials: The important role of dolomite. *Environ. Sci. Technol. Lett.* **2023**, *10*, 931–936. https://doi.org/10.1021/acs.estlett.3c00583.
67. Wang, J.; Guo, X. Rethinking of the intraparticle diffusion adsorption kinetics model: Interpretation, solving methods and applications. *Chemosphere* **2022**, *309*, 136732. https://doi.org/10.1016/J.CHEMOSPHERE.2022.136732.
68. Qadir, A.; Jamil, N.; Khan, S.M.; et al. Removal of direct red 16 (textile dye) from industrial effluent by using feldspar. *J. Chem. Soc. Pak.* **2014**, *36*, 191–197.
69. Kuśmierek, K.; Świątkowski, A. The influence of different agitation techniques on the adsorption kinetics of 4-chlorophenol on granular activated carbon. *React. Kinet. Mech. Catal.* **2015**, *116*, 261–271. https://doi.org/10.1007/s11144-015-0889-1.