

Shilei TU, Huiquan WANG, Yue HUANG, Zhonghe JIN, 2024. A spaceborne advanced storage system for remote sensing microsatellites. *Frontiers of Information Technology & Electronic Engineering*, 25(4):600-615.
<https://doi.org/10.1631/FITEE.2200445>

A spaceborne advanced storage system for remote sensing microsatellites

Key words: Microsatellite; Spaceborne advanced storage system (SASS); Scalability; Performance; Reliability

Corresponding author: Huiquan WANG

E-mail: hqwang@zju.edu.cn

 ORCID: <https://orcid.org/0000-0003-0113-8223>

Motivation

- Recent advances in satellite miniaturization technology have directed efforts in remote sensing towards microsatellite constellations. In particular, the application of compact commercial off-the-shelf (COTS) components breaks through the limitations of microsatellites in terms of size, weight, and power (SWaP) consumption, and computing and storage performance.
- As the core of remote sensing missions, remote sensing payload technology is developing rapidly, which brings an explosion in the volume of remote sensing data, and a spaceborne storage system with high performance is urgently necessary.

Main idea

- œ Modules of spaceborne advanced storage system (SASS), the multiple-input multiple-out (MIMO) cache and the NAND flash controller, have excellent scalability to accommodate different missions and payloads. The NAND flash controller provides smaller configurable functional particles for greater system flexibility and robustness.
- œ The performance of SASS is strong, and the dynamic programming method and queue scheduling method can effectively improve the efficiency of data scheduling to meet the requirements of high-speed multichannel data storage.
- œ The proposed data remapping method can reduce the retention and NAND flash program disturbance errors. It partially compensates for the limitations of the error correction algorithm, improves the reliability, and extends the system service life.

Hardware architecture

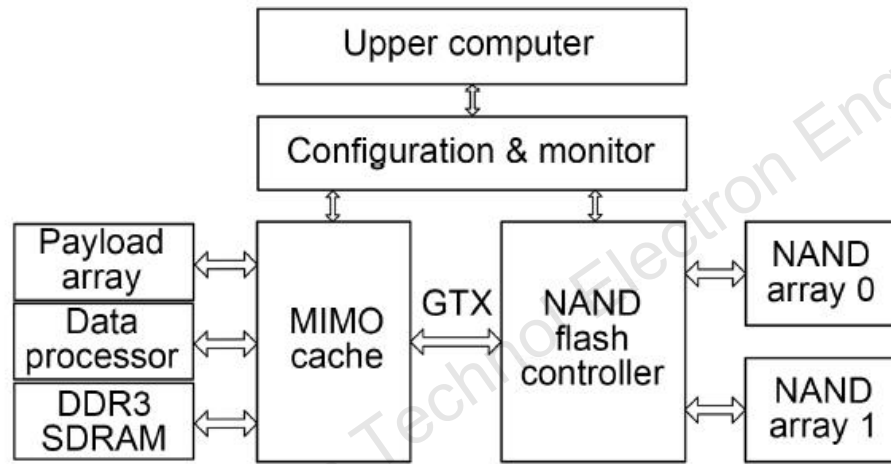


Fig. 1 Architecture of the spaceborne advanced storage system

MIMO cache

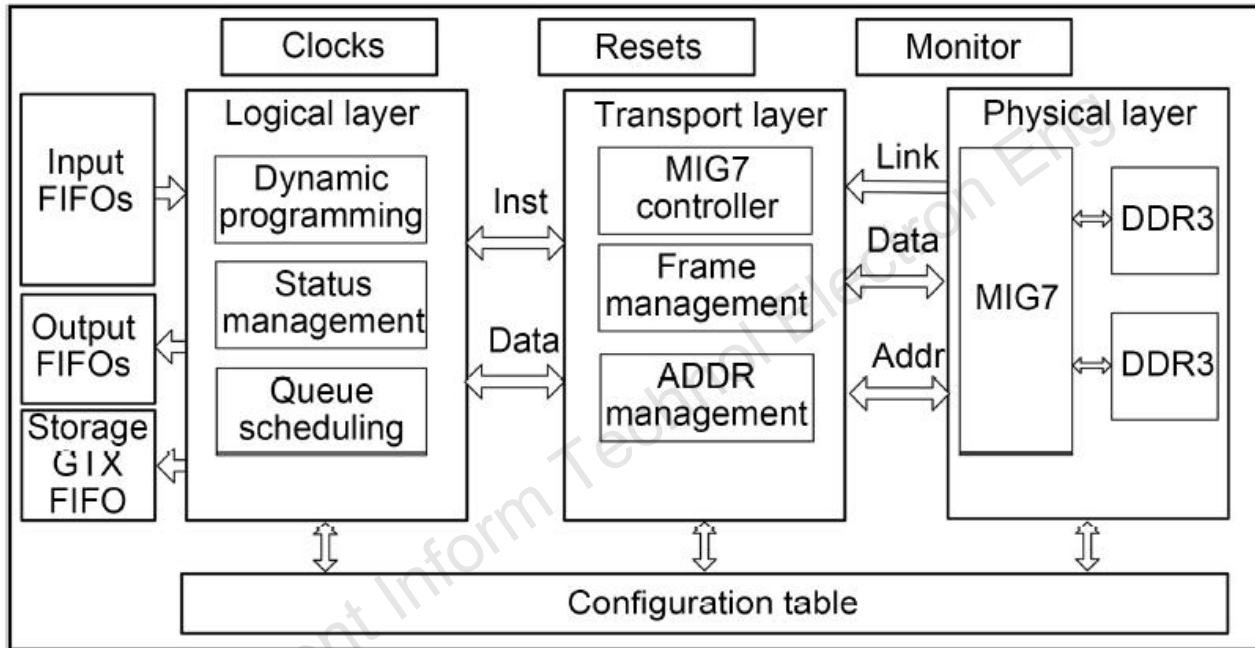


Fig. 2 Hardware architecture of the proposed cache

- **Modular and standardized MIMO cache**
- **Dynamic programming method for data input**
- **Queue scheduling method for data output**

NAND flash controller

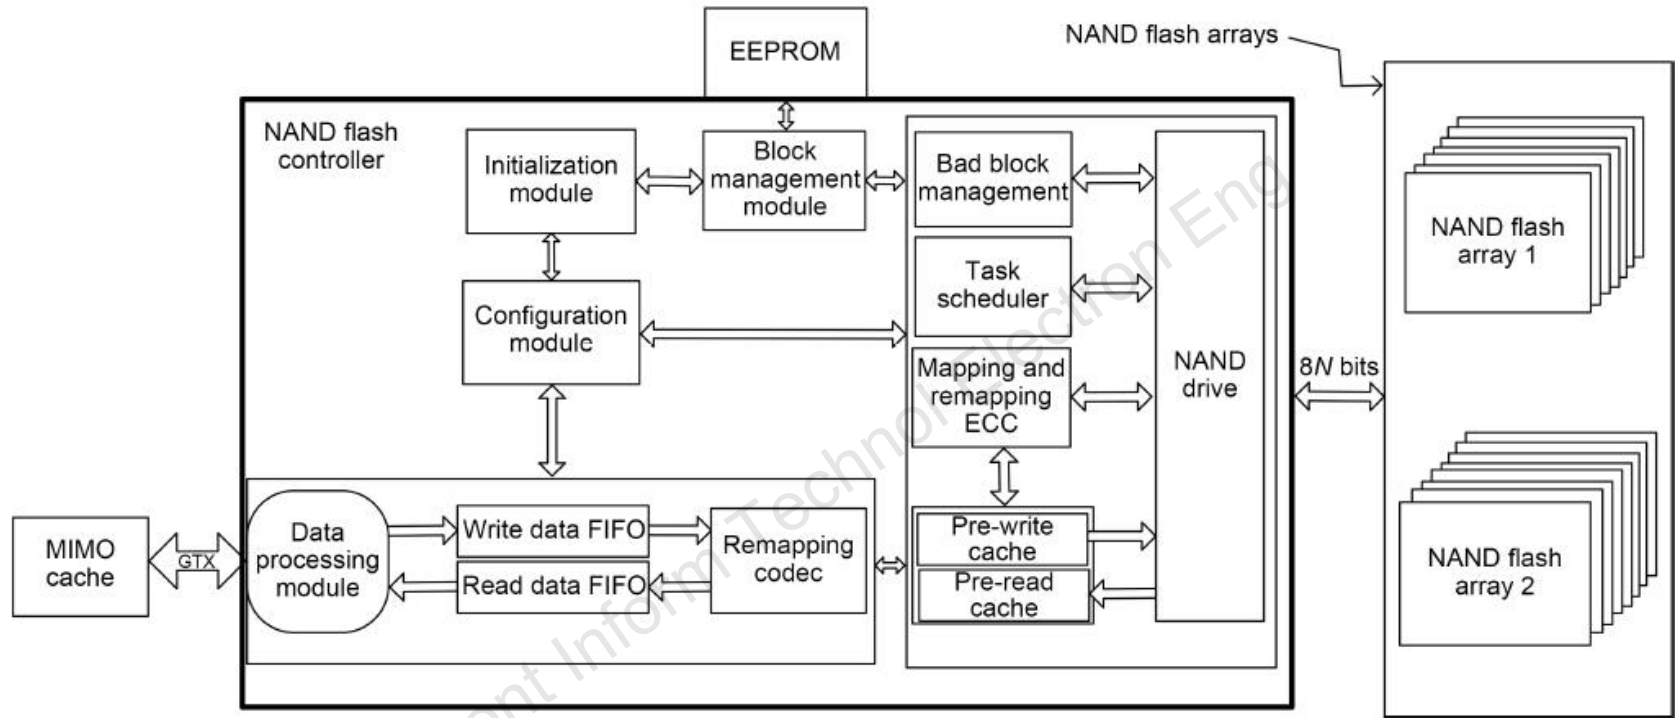


Fig. 4 The hardware architecture of the NAND flash controller

- Array programmable NAND flash controller
- Zero-delay configurable error correction scheme
- Data remapping method for reducing retention error and program disturbance error
- Block management scheme

Conclusions

In this paper, SASS is proposed and implemented with COTS devices for remote sensing microsatellites. It provides a dynamic programming, queue scheduling MIMO cache technique and a high-speed, high-reliability NAND flash controller for multiple microsatellite payload data. Experimental results show that SASS has outstanding scalability with a maximum write rate of 2429 Mb/s and preserves at least 78.53% of the performance when a single NAND flash fails. The scheduling technique effectively shortens the data scheduling time, and the data remapping method of the NAND flash controller can reduce the retention error by at least 50.73% and the program disturbance error by at least 37.80%.



Shilei TU received his BS degree in microelectronics science and engineering from the Northwestern Polytechnical University in 2018. In 2023, he received his PhD degree from the School of Aeronautics and Astronautics of Zhejiang University. His research interest is integrated electronic systems for micro-nano satellites.



Huiquan WANG received his BS and PhD degrees in microelectronics and solid-state electronics from Zhejiang University (ZJU), Zhejiang, in 2003 and 2008, respectively. He is now a professor in the Institute of Advanced Technology, ZJU. His research interests include microsatellite general and integrated electronics, space robotics, micro/nano sensors, and weak signal processing.



Yue HUANG received his BS degree from Nanjing University of Science and Technology, in 2021. In 2024, he received his master degree in engineering from the School of Aeronautics and Astronautics of Zhejiang University. His research interest is integrated electronic systems for micro-nano satellites.



Zhonghe JIN received his BS and PhD degrees in micro-electronics and solid-state electronics from Zhejiang University (ZJU), Zhejiang, in 1993 and 1998, respectively. He is now a professor in the School of Aeronautics and Astronautics, ZJU. His research interests include microsatellite technology and MEMS.