

Jiamiao MIAO, Xiaopu WANG, Yan ZHOU, Min YE, Hongyu ZHAO, Ruoyu XU, Huihuan QIAN, 2023. Magnetically driven microrobots moving in a flow: a review. *Frontiers of Information Technology & Electronic Engineering*, 24(11):1520-1540. <https://doi.org/10.1631/FITEE.2300054>

Magnetically driven microrobots moving in a flow: a review

Key words: Microrobot; Flow; Dynamics modeling; Control

Corresponding authors:

Xiaopu WANG, wangxiaopu@cuhk.edu.cn

 <https://orcid.org/0000-0001-6257-6505>

Huihuan QIAN, hhqian@cuhk.edu.cn


 <https://orcid.org/0000-0001-8269-0882>

Motivation


- What is our ultimate goal for a microrobot? Enable the microrobot to perform as a doctor, like in *Fantastic Voyage*. It is, however, too difficult to realize based on current resources.
- What is our contemporary goal then? Split the tasks into easier ones and solve them one by one. Thereinto, motion control in a flow is very important.
- How do scientists study and perform proper motion control? First, set up an appropriate experimental environment (whether mimicking human vessels or in real vessels); then study the mathematical model of the whole system (including the flow system and the microrobot); finally design a simple and effective control algorithm to perform the task.
- Our review is formulated based on the problem-solving path. We summarize the current applications, the three steps mentioned in the former paragraph with a review perspective, and the challenges that scientists are facing.

Flow systems: overview


This part summarizes and exemplifies different flow systems, consisting of flow types (including Poiseuille flow and pulsatile flow) and different types of flow systems (based on their similarity to the real blood vessel system).

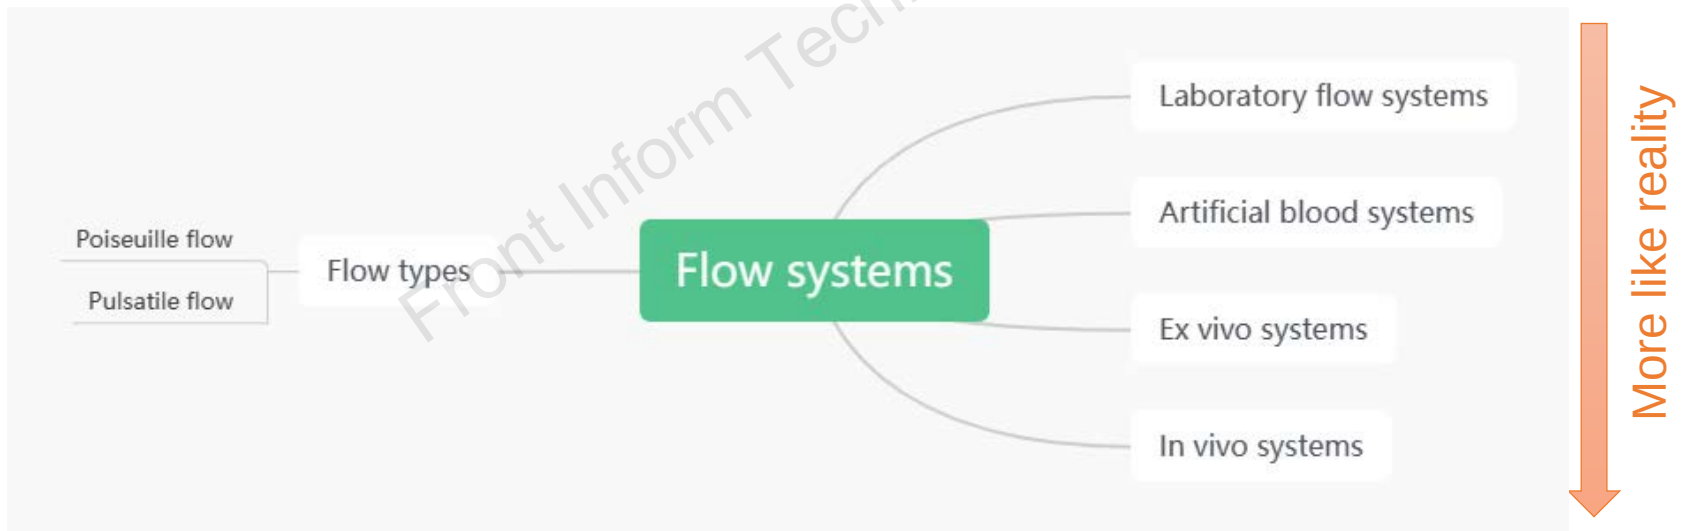

Flow system: examples

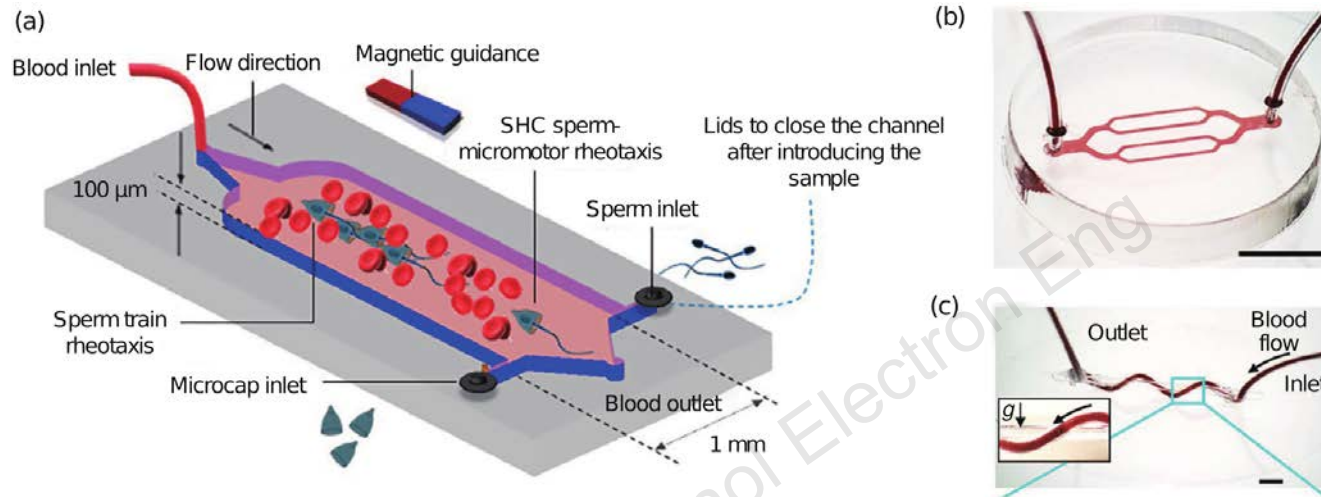


Examples of artificial blood systems: (a) from [1]; (b, c) from [2]

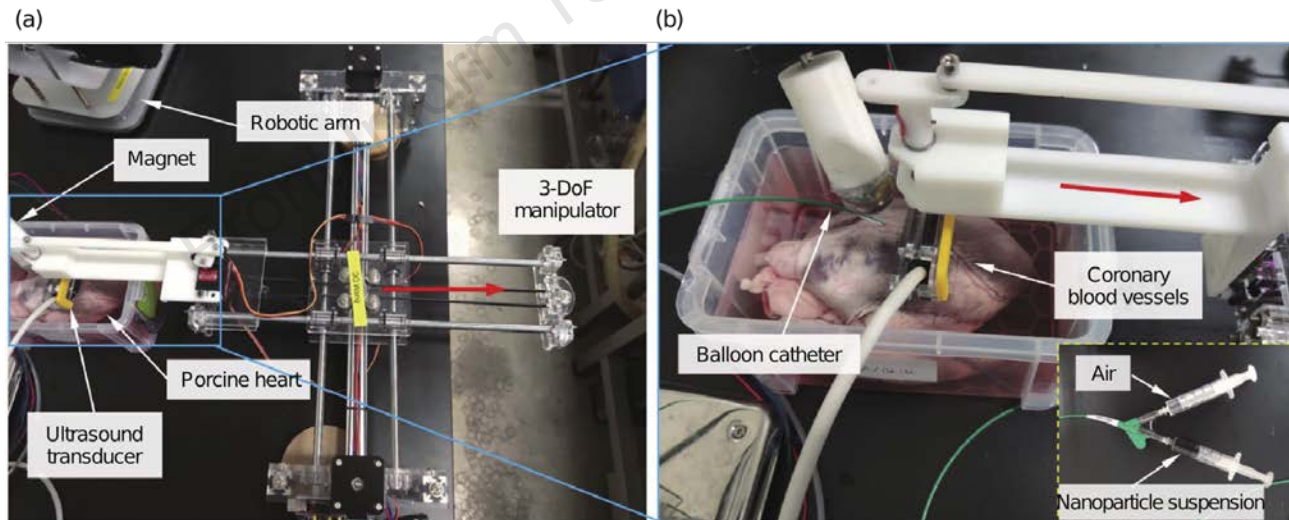

Examples of ex vivo flow systems: (a) and (b) both from [3]

Dynamics modeling of the motion of microrobots in a flow

Obtaining the model of the whole system is important for controlling the microrobot as planned. In this part, we give theoretical analysis (including magnetic actuation force, magnetic actuation torque, force analysis, six drag forces, and two complex examples) and discuss theoretical models vs. experiments.

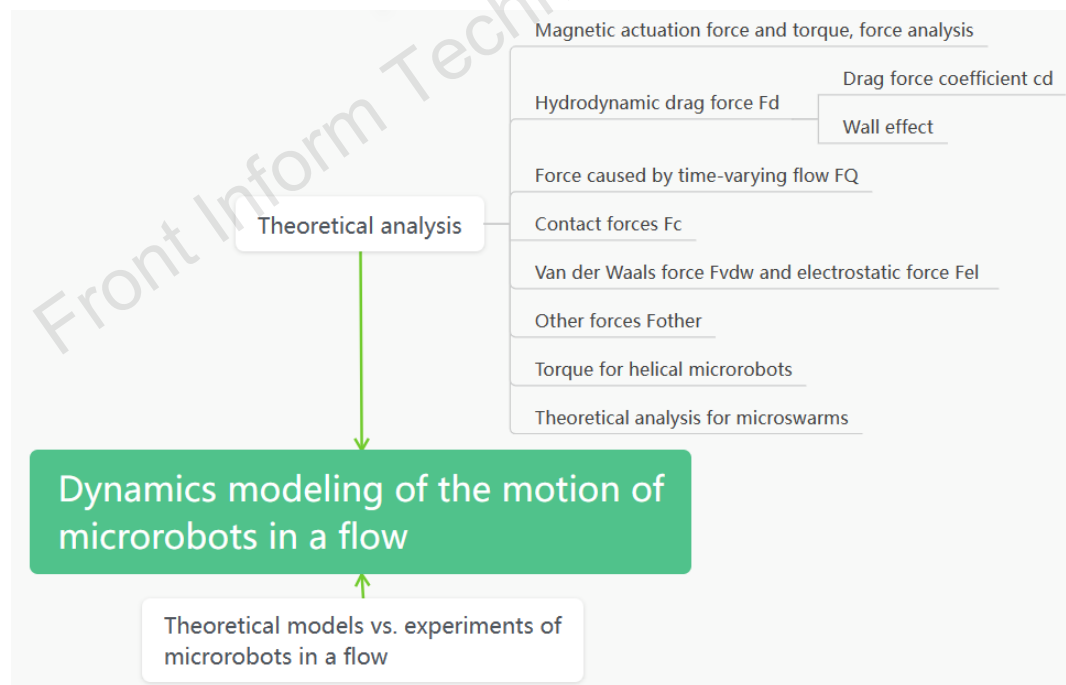

Theoretical analysis

- We discuss force analysis and actuation, as well as torque actuation here. Factors that influence magnetic torques are summarized. Among them, drag force is concluded in detail, including drag force coefficient c_d and wall effect.
- As two special cases, helical microrobots and microswarms are discussed. Influencing factors on the motion of a helical microrobot (motion direction, channel size, magnetic field rotating frequency, and distance between the microrobot and the channel wall) and categories of microswarms in a flow (magnetic-interaction induced swarms, hydrodynamic-interaction-induced swarms, and weakly interacting swarms) are summarized.

Theoretical models vs. experiments of microrobots in a flow

Based on the theoretical analysis of forces, influencing factors, and the finite element method (FEM), tentative theoretical results of motion in a flow can be obtained. These results are compared to experimental results.

Comparison of microrobots' displacement based on analytical methods, FEM, and experimental methods [4].


Table 1 Displacement values under the analytical calculations from simulation results and experimental measurements, and error values in comparison with the experimental results at different flow rates from 1.0 to 4.5 mL/min

Parameter		1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5
Displacement (μm)	Analytical	1119.7	2139.9	3365.3	4676.2	6243.3	9217.5	11 182.3	15 217.9
	FEM simulation	1113.8	2171.5	3297.7	4638.3	6389.8	8563.1	11 402.2	15 179.4
	Experimental	1196.6	2108.7	3462.0	4581.5	5972.8	9160.4	11 016.3	15 152.2
Error (%)	Analytical	6.43	1.48	2.79	2.07	4.53	0.62	1.51	0.43
	FEM simulation	6.92	2.98	4.75	1.24	6.98	6.52	3.50	0.18



Control strategies and methods

- The control outcomes, e.g., precision and response time, are closely related to the appropriate control methods chosen.
- Microrobot control methods are summarized:
 - ✓ Open-loop control
 - ✓ Proportional-integral-derivative (PID) control
 - ✓ Model predictive control (MPC)
 - ✓ Backstepping control
 - ✓ Extended state observer (ESO) based model-free control



Control examples

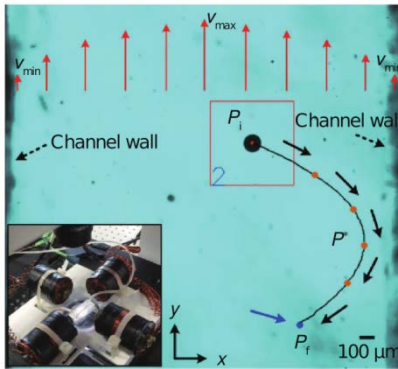


Example of open-loop control [5]

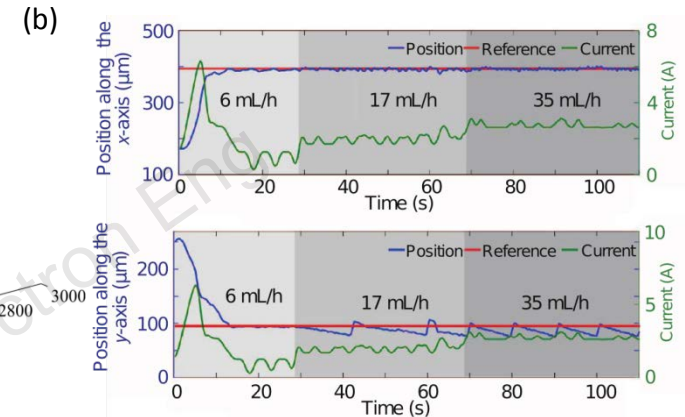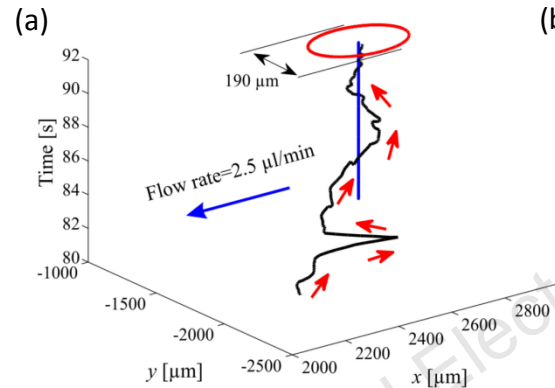

Examples of PID control: (a) from [6]; (b) from [7]

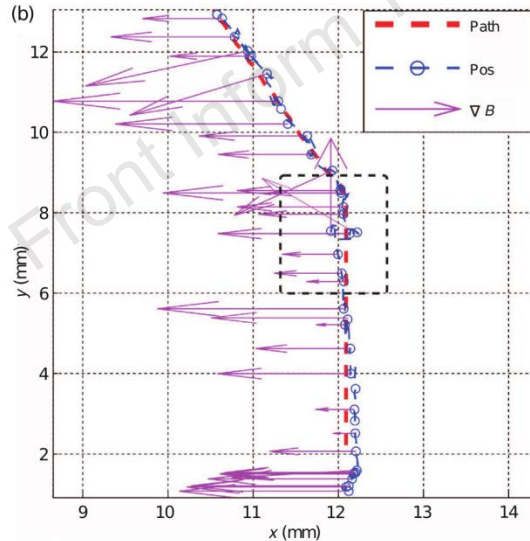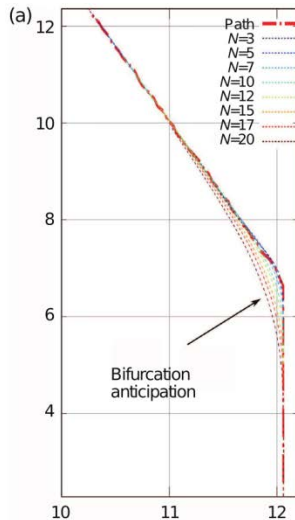

Example of MPC [8]

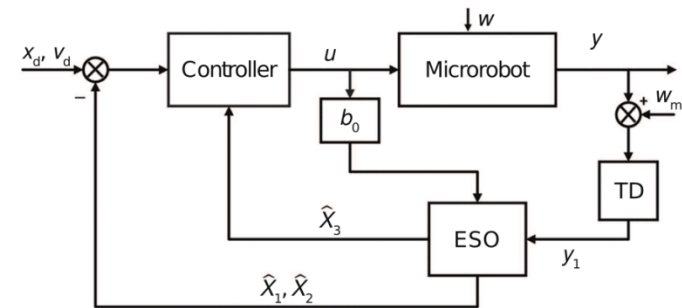

Example of model-free control [9]

Conclusions and outlook

- Magnetic microrobots have shown great potential in biomedical applications, such as embolization and drug delivery.
- Although many studies have been conducted, as summarized in this review, microrobot motion in a flow still has several challenges. The flow systems should be developed for more resemblance to the actual case. For complex systems, more accurate dynamics modeling is required. Image-based tracking and control of microrobots in vivo need further study. Moreover, the controller should be more robust to disturbances from the blood flow.

References

- [1] Xu H, et al., 2020. Sperm micromotors for cargo delivery through flowing blood. *ACS Nano*, 14(3):2982-2993.
- [2] Alapan Y, et al., 2020. Multifunctional surface microrollers for targeted cargo delivery in physiological blood flow. *Sci Robot*, 5(42):eaba5726.
- [3] Wang Q, et al., 2021. Ultrasound Doppler-guided real-time navigation of a magnetic microswarm for active endovascular delivery. *Sci Adv*, 7(9):eabe5914.
- [4] Demircali AA, et al., 2021. Longitudinal motion modeling and experimental verification of a microrobot subject to liquid laminar flow. *IEEE/ASME Trans Mechatron*, 26(6):2956-2966.
- [5] Choi J, et al., 2010. Position stabilization of microrobot using pressure signal in pulsating flow of blood vessel. *IEEE SENSORS*, p.723-726.
- [6] Khalil ISM, et al., 2014. The control of self-propelled microjets inside a microchannel with time-varying flow rates. *IEEE Trans Robot*, 30(1):49-58.
- [7] Khalil ISM, et al., 2016. Robust and optimal control of magnetic microparticles inside fluidic channels with time-varying flow rates. *Int J Adv Robot Syst*, 13(3):123.
- [8] Belharet K, et al., 2012. Control of a magnetic microrobot navigating in microfluidic arterial bifurcations through pulsatile and viscous flow. *IEEE/RSJ Int Conf on Intelligent Robots and Systems*, p.2559-2564.
- [9] Meng K, et al., 2020. Motion planning and robust control for the endovascular navigation of a microrobot. *IEEE Trans Ind Inform*, 16(7):4557-4566.



Jiamiao MIAO received her BE degree from Harbin Institute of Technology, Harbin, China, in 2020. She is currently a master student with the School of Science and Engineering, the Chinese University of Hong Kong, Shenzhen, China. Her research interest is the modeling and control of microrobots in a flow.



Xiaopu WANG works as an associate researcher at the Shenzhen Institute of Artificial Intelligence and Robotics for Society (AIRS). She also serves as an adjunct assistant professor at the Chinese University of Hong Kong, Shenzhen, China. Since her doctoral study at ETH Zurich, she has been working on micro-motors/swimmers, including both fundamental research and application exploration. Currently, she is focusing mainly on the study of functional microrobots and microdevices for biomedical applications. Her research interests include 3D printing, photopolymerization, additive manufacturing, and magnetic actuation.



Yan ZHOU received her BE degree in chemical engineering and technology from Harbin University of Science and Technology in 2012 and PhD degree in chemistry from Hong Kong Baptist University in 2017. From 2018 to 2020, she worked as a postdoctoral researcher at Shenzhen University. She is now an overseas high-level talent in Shenzhen (Peacock C). Since 2021, she has been serving as an assistant research fellow at AIRS. Her research interest focuses on biomedical microrobots and photodynamic therapy for tumors.



Min YE received her BS degree in pharmaceutic preparation from Wuhan Institute of Technology in 2016 and MS degree in pharmacy from Southern Medical University in 2019. She is now working as a research assistant at AIRS. Her current research interest focuses on the biomedical applications of magnetic microrobots.



Hongyu ZHAO received his BE degree in mechanical engineering from Nanchang Hangkong University in 2017. From 2020 to 2023, he worked as a research assistant at AIRS. His research interest focuses on the micro- and nanorobotic system.



Ruoyu XU received his BE degree from Hefei University of Technology, Hefei, China, in 2015, and MS degree from Huazhong University of Technology, Wuhan, China, in 2018. He is currently pursuing his PhD degree with the School of Science and Engineering, the Chinese University of Hong Kong, Shenzhen, China. His research interests include the design, dynamics analysis, and motion control of robotic systems.



Huihuan QIAN (Member, IEEE) received his BE degree in automation from the Department of Automation, University of Science and Technology of China, Hefei, China, in 2004, and PhD degree in automation and computer-aided engineering from the Department of Mechanical and Automation Engineering, the Chinese University of Hong Kong, Hong Kong, China, in 2010. He is currently an associate professor with the School of Science and Engineering, the Chinese University of Hong Kong, Shenzhen, China, and an associate director with AIRS. His current research interests include marine robotics and intelligent systems.