

Yuanyang XUN, Siqi LI, Feiyu ZHANG, Yan HONG, Ke XU, Ligang CHEN, Song LIU, Bin LI, 2023. Rational design of semiconductor metal oxide nanomaterials for gas sensing by template-assisted synthesis: a survey. *Frontiers of Information Technology & Electronic Engineering*, 24(7):945-963.
<https://doi.org/10.1631/FITEE.2200552>

Rational design of semiconductor metal oxide nanomaterials for gas sensing by template-assisted synthesis: a survey

Key words: Gas sensors; Chemi-resistors; Template-assisted methods; Nanostructure; Dimension

Corresponding author: Siqi LI

E-mail: lisiqibest@sina.com

 ORCID: <https://orcid.org/0000-0003-0695-9629>



Gas sensors have received extensive attention because of the gas pollution caused by rapid construction of urbanization and industrialization


Sensing material	Gas	Temperature	Concentration/Response	T_{res} (s)	LOD (ppb)	Reference
rGO/CuCoO _x	NO ₂	RT	1 ppm/64.76%	250	50	Ogbeide et al. (2022)
Pt@In ₂ O ₃	Acetone	320 °C	1 ppm/6.23	11	10	Liu W et al. (2018)
ZIF-7/TiO ₂	Formaldehyde	RT	5 ppm/1350	9	16	Jo et al. (2021)
GO/TiO ₂	NO ₂	RT	1.75 ppm/3.14	35	70	Giampiccolo et al. (2019)
Pd-BiVO ₄	3-hydroxy-2-butanone	200 °C	10 ppm/103.7	12	200	Chen et al. (2020)
ZnO	NO ₂	RT	1 ppm/29	22	0.2	Xia et al. (2020)
CeO ₂ -WO ₃	Acetone	250 °C	0.5 ppm/1.31	34	500	Yuan KP et al. (2020)




Tendency and challenges



Gas sensors based on semiconductor metal oxide (SMO) have the advantages of high response, excellent repeatability, stability, and cost-effectiveness, and have become extremely important components in the gas sensor field.

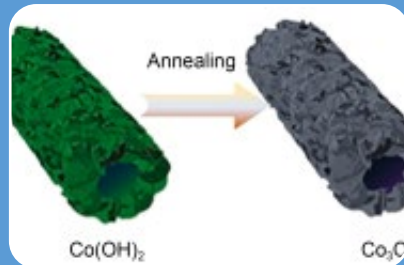

Materials with regular structures and controllable morphology exhibit more consistent and repeatable performance.

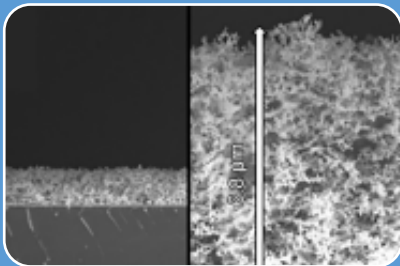

However, during the process of material synthesis, because of the uncontrollability of the microcosm, nanomaterials often show irregularities, unevenness, and other shortcomings.



Motivation

Over recent decades, there has been a growing interest internationally in gas sensing to avoid environmental problems and human health damage.

Traditional methods need a specific device, are complicated to operate, and are unsuitable for timely monitoring of harmful gases.



1D nanomaterials based on template-assisted methods

- ◆ 1D nanomaterials contain mainly nanorods (Nasir et al., 2014; Zhang B et al., 2021), nanofibers (Kim DH et al., 2019, 2020), or nanotubes (Xue et al., 2016; Sharma et al., 2021).
- ◆ 1D nanostructured materials exhibit excellent electrical mobility, facilitating the transport of electrons, which is favorable for gas sensing performance.

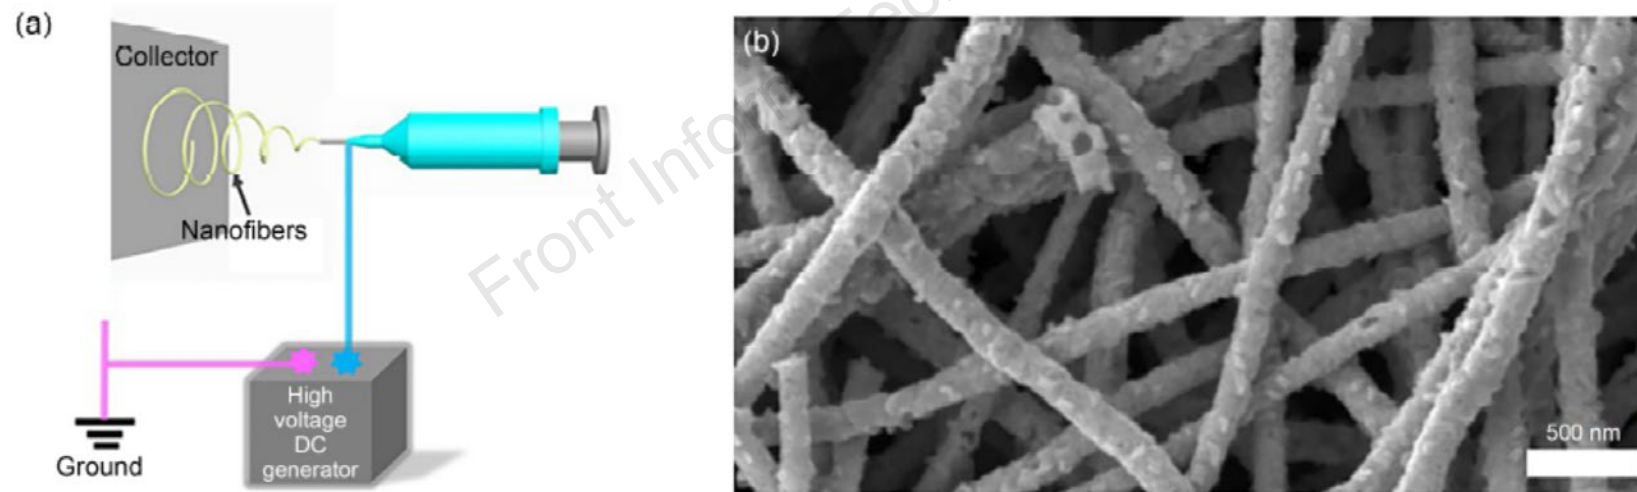


Fig. 1 Schematic of the basic setup for electrospinning (a) and a scanning electron microscope (SEM) image of Pr-doped BiFeO₃ (b)



2D nanomaterials based on template-assisted methods

- ◆ The synthesis of gas sensors based on 2D nanomaterials using a template-assisted method is relatively rare nowadays, but their performance is excellent (Ma et al., 2020; Wen et al., 2023).
- ◆ 2D nanomaterials are appropriate for the production of gas sensors due to their large specific surface area, excellent carrier mobility, and large number of adsorption sites.

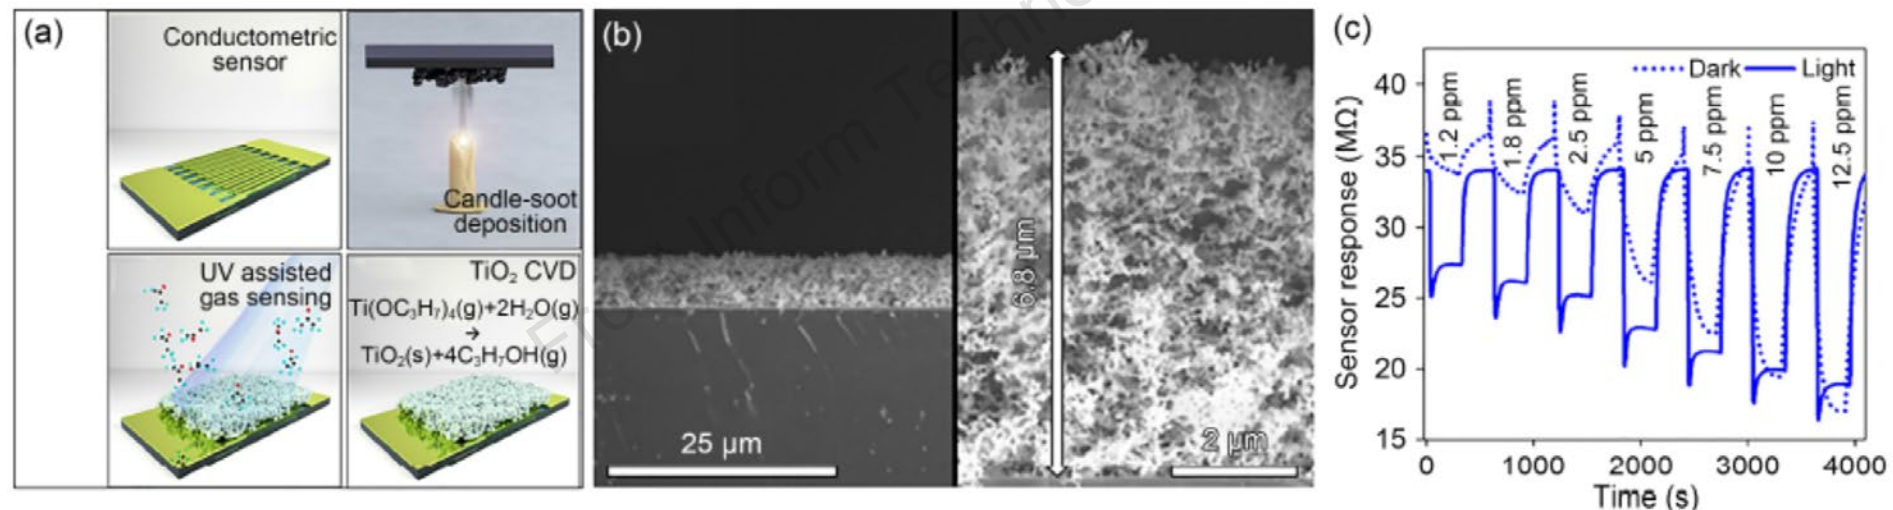


Fig. 5 Schematic of the fabrication process of a soot template TiO_2 gas sensor (a), different magnification scanning electron microscope (SEM) images showing the uniformity and thickness of the surface of a SnO_2 sensor device (b), and dynamic response curve of the SnO_2 gas sensor to different acetone concentrations (c)



3D nanomaterials based on template-assisted methods

- ◆ 3D nanomaterials generally have a large specific surface area, a stable structure, and good gas diffusion, making them ideal for use as gas sensitive materials.


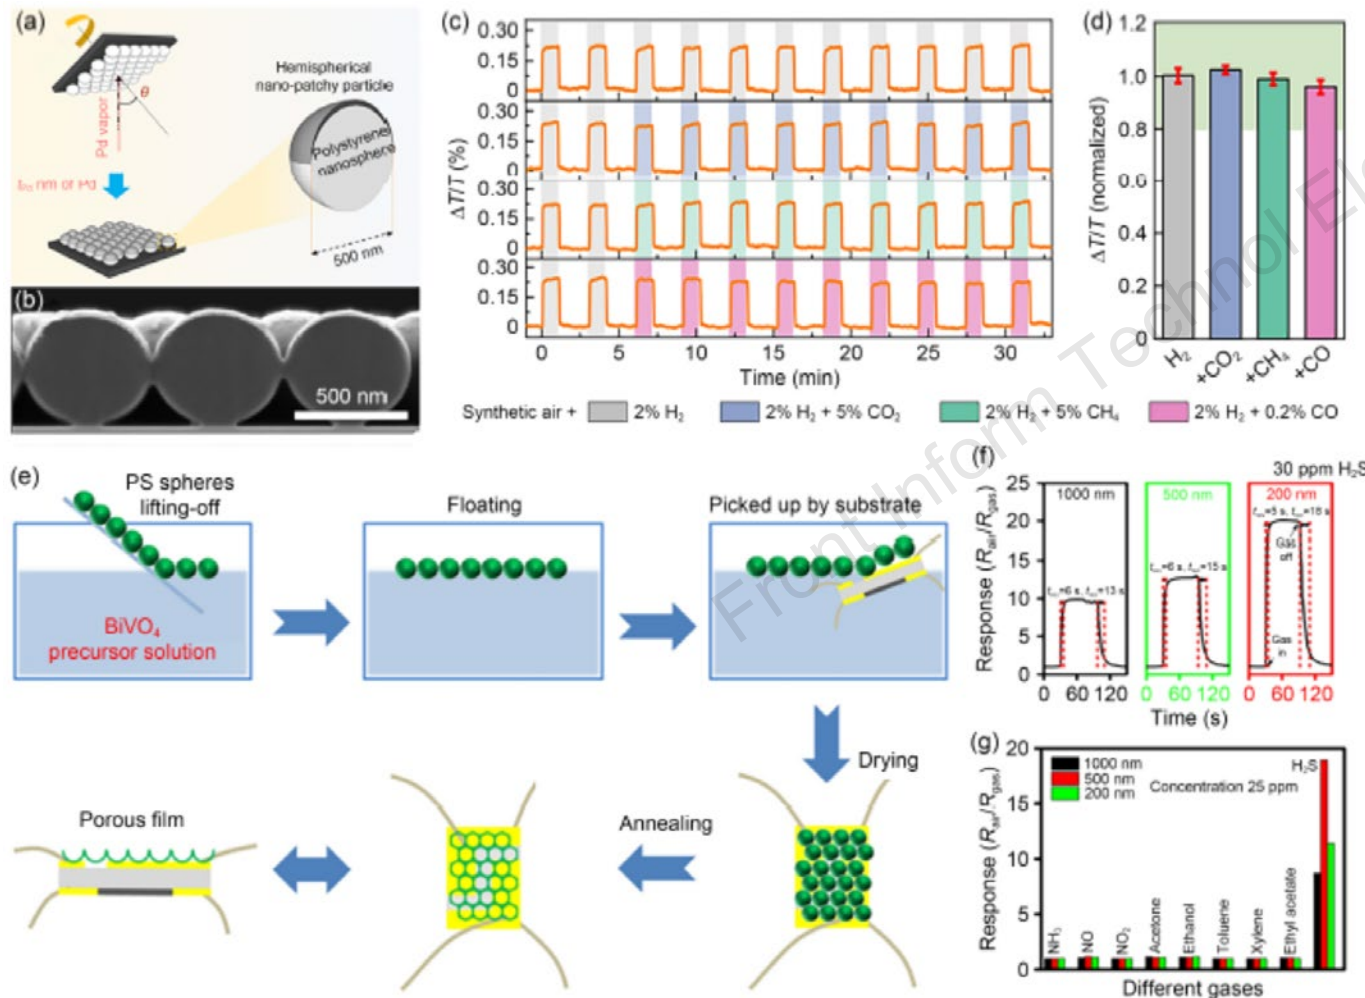


Fig. 6 Schematic of the process for fabricating PdCo NP/PMMA nanomaterials (a), a cross-sectional scanning electron microscope (SEM) image of NPs (b), response of PdCo NPs to 2% H_2 , 2% H_2 +5% CH_4 , 2% H_2 +5% CO_2 , and 2% H_2 +0.2% CO (c), the standard deviation from 2% H_2 (d), schematic of the procedure for preparation of an ordered porous $BiVO_4$ gas sensor (e), characteristic curves toward 30 ppm H_2S (f), and response of gas sensors based on different thickness to 25 ppm of different gases (g)



Carbonaceous, SiO_2 spheres , high molecular weight polymer and metal organic framework (MOF) templates

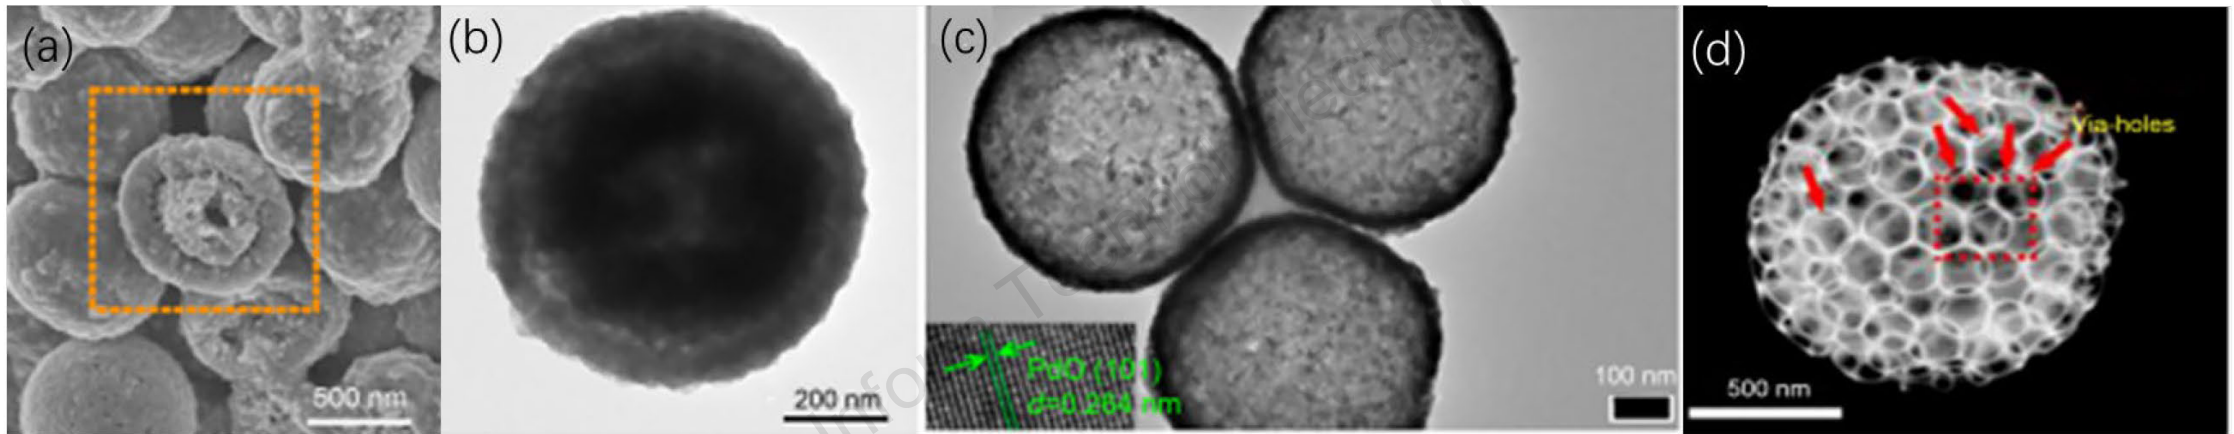

A scanning electron microscope (SEM) image of semiconducting metal oxide 3D nanomaterials prepared by glucose (a), a field emission scanning electron microscope (FESEM) image of NiCo_2O_4 double-shelled hollow spheres (DHSs) (b), a transmission electron microscope (TEM) image of PdO hollow shells (HSs) (c), and an SEM image of $\text{IO}-(\text{Ga}_{0.2}\text{In}_{0.8})_2\text{O}_3$ (d)



Other templates

- ◆ Other templates could be used to fabricate 3D nanomaterials with a complicated structure, resulting in a large specific surface area.

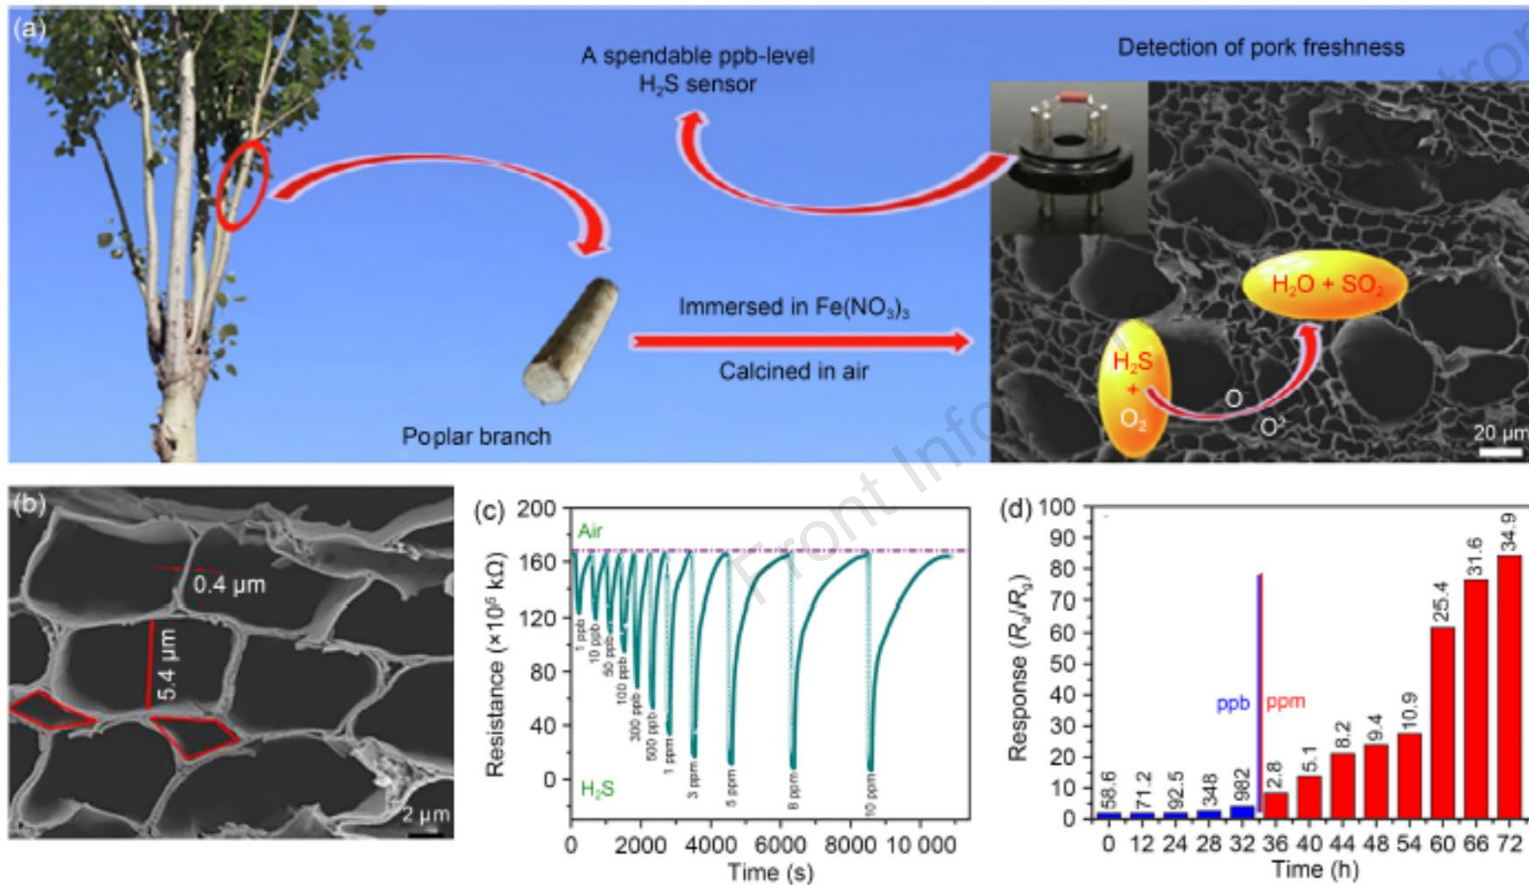


Fig. 13 Schematic of the synthesis process and sensing device of porous $\alpha\text{-Fe}_2\text{O}_3$ tubules (a), a scanning electron microscope (SEM) image of Fe-600 (b), response/recovery curve to different concentrations of H_2S (c), and real-time detection of the H_2S concentration of pork at different time intervals (d)



Conclusions and outlook

In this review, the research progress of gas sensors based on template-assisted synthesis methods in recent years is summarized, including 1D, 2D, and 3D nanomaterials, as well as the morphology and properties of these materials synthesized by different templates, such as biomass, carbonaceous, and polymeric materials. For 1D nanomaterials, semiconductor nanomaterials prepared using the template-assisted method have a uniform morphology and complex surface structure, excellent gas diffusion, and a large number of active sites, efficiently accelerating the reaction rate, increasing the gas detection ability of the gas sensor, and ensuring long-term stability and repeatability.

The field of gas sensors has made substantial use of the template-assisted synthesis technique. Looking ahead, the components of the template will develop toward high performance and low cost. For instance, the potential of biomass material, which is in line with the development path, cannot be overlooked as an inexpensive and environmentally beneficial resource. It could resolve many issues with the template-assisted method at this time due to its uniform structure and straightforward treatment process.



Reference

- Ogbeide O, Bae G, Yu WB, et al., 2022. Inkjet-printed rGO/binary metal oxide sensor for predictive gas sensing in a mixed environment. *Adv Funct Mater*, 32(25):2113348. <https://doi.org/10.1002/adfm.202113348>
- Liu W, Xu L, Sheng K, et al., 2018. A highly sensitive and moisture-resistant gas sensor for diabetes diagnosis with Pt@In₂O₃ nanowires and a molecular sieve for protection. *NPG Asia Mater*, 10(4):293-308. <https://doi.org/10.1038/s41427-018-0029-2>
- Chen J, Feng DL, Wang C, et al., 2020. Gas sensor detecting 3-hydroxy-2-butanone biomarkers: boosted response via decorating Pd nanoparticles onto the {010} facets of BiVO₄ decahedrons. *ACS Sens*, 5(8):2620-2627. <https://doi.org/10.1021/acssensors.0c01149>
- Xia Y, Zhou LX, Yang J, et al., 2020. Highly sensitive and fast optoelectronic room-temperature NO₂ gas sensor based on ZnO nanorod-assembled macro-/mesoporous film. *ACS Appl Electron Mater*, 2(2):580-589. <https://doi.org/10.1021/acsaelm.9b00810>
- Yuan KP, Wang CY, Zhu LY, et al., 2020. Fabrication of a microelectromechanical system-based acetone gas sensor using CeO₂ nanodot-decorated WO₃ nanowires. *ACS Appl Mater Interfaces*, 12(12):14095-14104. <https://doi.org/10.1021/acsami.9b18863>
- Guo LL, Zhang B, Yang XL, et al., 2021. Sensing platform of PdO-ZnO-In₂O₃ nanofibers using MOF templated catalysts for triethylamine detection. *Sens Actuat B Chem*, 343:130126. <https://doi.org/10.1016/j.snb.2021.130126>
- Kim DH, Cha JH, Lim JY, et al., 2020. Colorimetric dye-loaded nanofiber yarn: eye-readable and weavable gas sensing platform. *ACS Nano*, 14(12):16907-16918. <https://doi.org/10.1021/acsnano.0c05916>



Yuanyang XUN received his B.S. degree from the Applied Chemistry, Northeast Forestry University (NEFU) in 2020. Presently, he is studying for his Master of Engineering degree (M.E.) and interested in the synthesis and characterization of the semiconducting metal oxide materials and gas sensors.



Siqi LI is a lecturer at the College of Chemistry, Chemical Engineering and Resource Utilization, NEFU. She received her PhD degree from Jilin University in 2019. Her research interests include nanomaterial design and preparation and gas sensor development.



Feiyu ZHANG received his B.S. degree from the Chemical Engineering and Technology, NEFU in 2020. Now, he is studying for his M.E. degree and interested in the synthesis and characterization of the semiconducting functional nanomaterials and gas sensors.



Yan HONG received her B.S. degree from the Chemistry Specialty, Harbin University in 2020. Now, she is studying for her M.E. degree and interested in electrocatalytic reduction of nitrate to ammonia.



Ke XU received his B.S. degree from the Applied Chemistry, Bohai University in 2019. Presently, he is studying for his Master of Science degree (M.S.) and interested in the preparation and characterization of the semiconducting metal oxide materials and gas sensors.



Song LIU is a professor at the College of Chemistry, Chemical Engineering and Resource Utilization, NEFU. He received his B.S. degree from Jilin University in 2014, and his PhD degree from Dalian Institute of Chemical Physics, Chinese Academy of Sciences (DICP, CAS) in 2020. His research interests include high value utilization of biomass, $\text{CO}_2/\text{N}_2/\text{H}_2\text{O}$ electrochemical conversion reaction.



Bin LI, Professor, Doctoral Supervisor, President of Northeast Forestry University, Vice Chairman of the Teaching Guidance Committee of College Chemistry Curriculum of Higher Education Institutions under the Ministry of Education, Chemistry Discipline Leader, Director of the Key Laboratory of Molecular Design and Preparation of Flame-retardant Materials in Heilongjiang Province, Distinguished Professor of Longjiang Scholars, Recipient of the State Council's Governmental Special Allowance and the Outstanding Young Scientist Fund of Heilongjiang Province, Outstanding Teacher of the Province, and Outstanding Communist Party Member. He is also a member of the Expert Committee of National Green Flame Retardant Materials Industry Technology Innovation Strategy Alliance, and a member of the Expert Group of Industrial Economy of Heilongjiang Provincial Science and Technology Guarantee Committee. His research interests include the design and synthesis of high-performance halogen-free flame retardants; the preparation of high-performance halogen-free flame retardant polymer materials and the study of charcoal-forming, smoke-suppressing and toxicity-reducing mechanisms; the design and preparation of high-temperature resistant flame retardant and heat-insulating materials; and the high-value utilization of agroforestry biomass materials.