

Electronic Supplementary Material

Revealing effects of powder reuse for LPBF-fabricated NiTi shape memory alloys

Xiang Li¹, Meng Zhou¹, Sihui Peng¹, Xiaonan Chen¹, Xueyuan Ge²,
Bingmin Huang³, Lishan Cui¹, and Shijie Hao (✉)¹

1 College of New Energy and Materials, China University of Petroleum, Beijing 102249, China

2 State Key Laboratory of Advanced Forming Technology and Equipment, China Machinery Institute of Advanced Materials Co., Ltd., Zhengzhou 450001, China

3 Jiangsu Smart Advanced Material Technology Co., Ltd., Xuzhou 221000, China

E-mail: haoshijie@cup.edu.cn

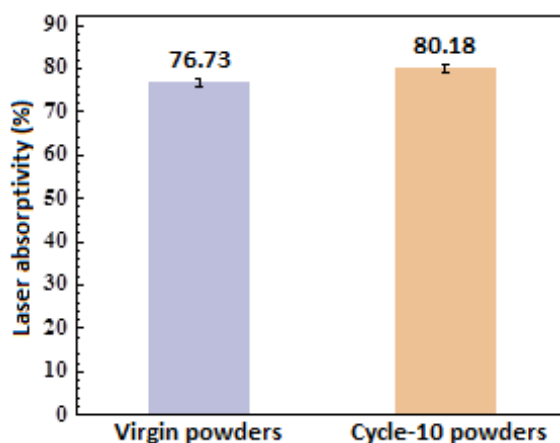


Fig. S1 Comparison between laser absorptivity values of LPBF-fabricated NiTi specimens made from virgin powders and Cycle-10 powders.

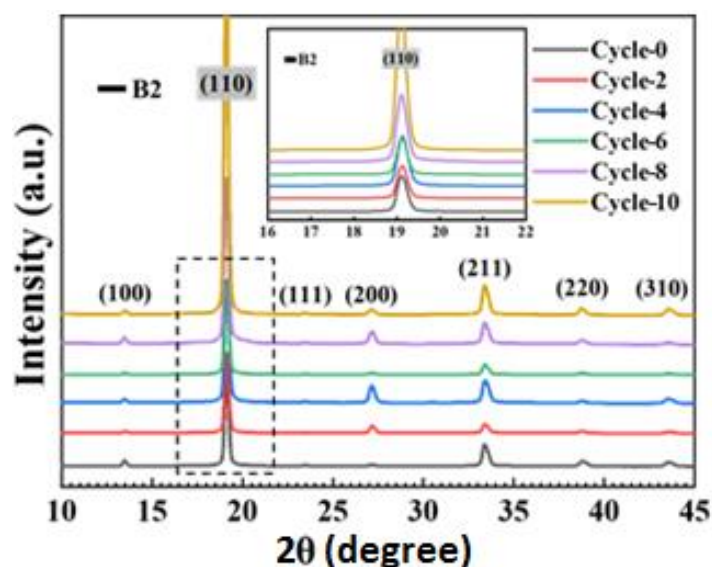


Fig. S2 XRD patterns of LPBF-fabricated NiTi specimens made from virgin powders and reused powders (collection temperature: 100 °C).