

Changwen DING, Chuntao SHAO, Siteng ZHOU, Di ZHOU, Runle DU, Jiaqi LIU, 2025. Distributed multi-target tracking with labeled multi-Bernoulli filter considering efficient label matching. *Frontiers of Information Technology & Electronic Engineering*, 26(3):400-414.
<https://doi.org/10.1631/FITEE.2400582>

Distributed multi-target tracking with labeled multi-Bernoulli filter considering efficient label matching

Key words: Distributed multi-sensor multi-target tracking; Labeled multi-Bernoulli filter; Arithmetic average fusion; Label matching

Corresponding author: Di ZHOU
E-mail: zhoud@hit.edu.cn

Motivation

- Conventional distributed labeled multi-Bernoulli (LMB) filter fusion has the premise that the labels among local densities have already been matched. However, considering that the label space of each local posterior is independent, such a premise is not practical in many applications.

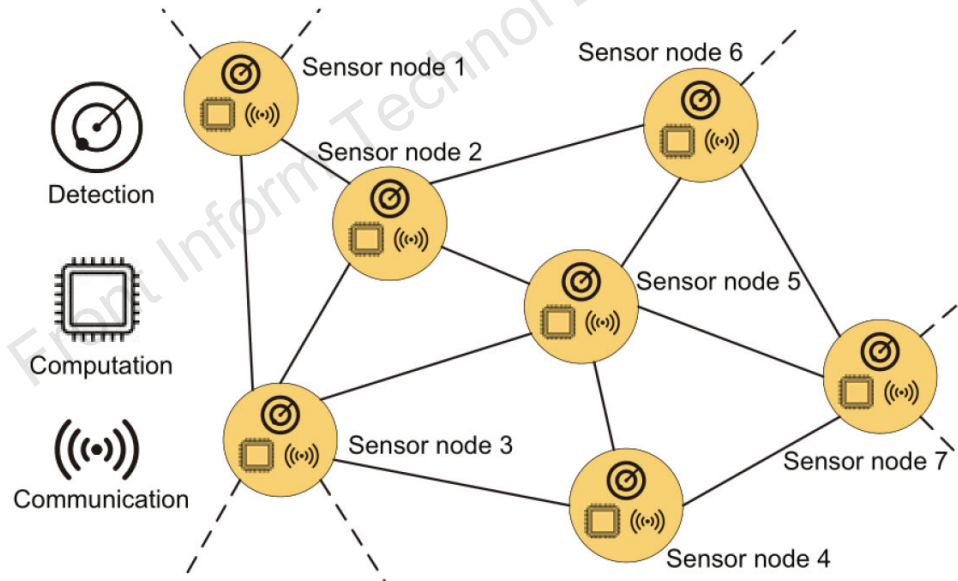


Fig. 2 Schematic of the sensor network

Main idea

- To achieve distributed fusion practically, we propose an efficient label matching method derived from the divergence of arithmetic average (AA) mechanism, and subsequently label-wise LMB filter fusion is performed according to the matching results.
- Moreover, to guarantee the consistency and completeness of the fusion outcome, the overall fusion procedure is designed into the following four stages: pre-fusion, label determination, posterior complement, and uniqueness check. The performance of the proposed label matching distributed LMB filter fusion is demonstrated in a challenging nonlinear bearings-only multi-target tracking (MTT) scenario.

Method

Generalize AA divergence:

$$\begin{aligned}\tau^* &= \arg \min_{\tau} G(\Xi) \\ &= \arg \min_{\tau} \sum_{i \in \mathcal{N}} \omega_i D_{\text{KL}}^{(\tau_i)} \left(\pi_i \parallel \sum_{j \in \mathcal{N}} \omega_j \pi_j \right). \quad (33)\end{aligned}$$

Derive the label matching cost function:

$$J(\tau) = \sum_{\ell \in \mathbb{L}_a} G(\ell, \tau(\ell)), \quad (34)$$

where

$$\begin{aligned}G(\ell, \tau(\ell)) &= \omega_a \left(D_{\text{KL}} \left(r_a^{(\ell)} \parallel r^{(\ell)} \right) + r_a^{(\ell)} D_{\text{KL}} \left(p_a^{(\ell)} \parallel p^{(\ell)} \right) \right) \\ &\quad + \omega_b \left(D_{\text{KL}} \left(r_b^{(\tau(\ell))} \parallel r^{(\ell)} \right) + r_b^{(\tau(\ell))} D_{\text{KL}} \left(p_b^{(\tau(\ell))} \parallel p^{(\ell)} \right) \right), \quad (35)\end{aligned}$$

Method

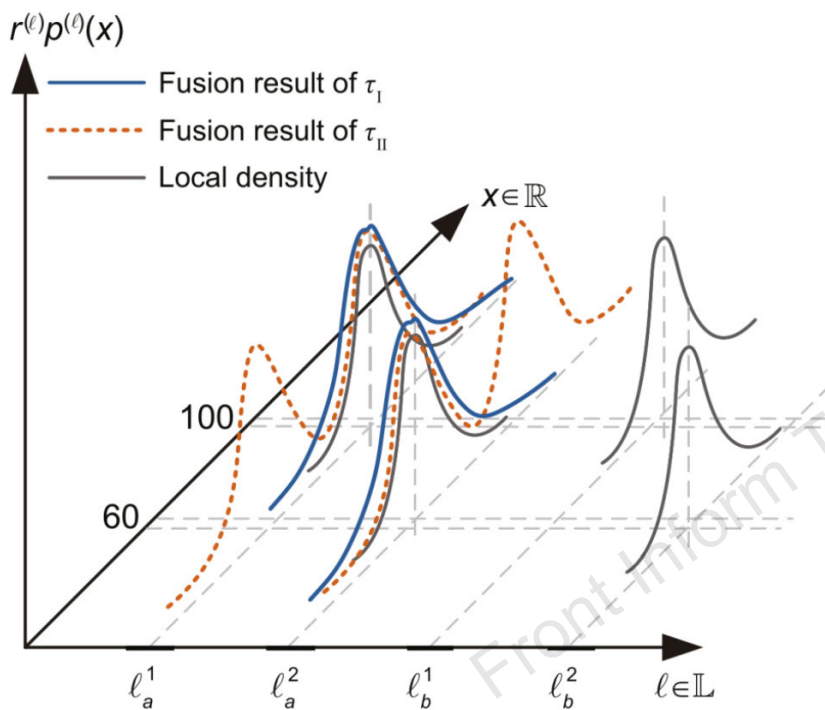


Fig. 3 Different label matching results

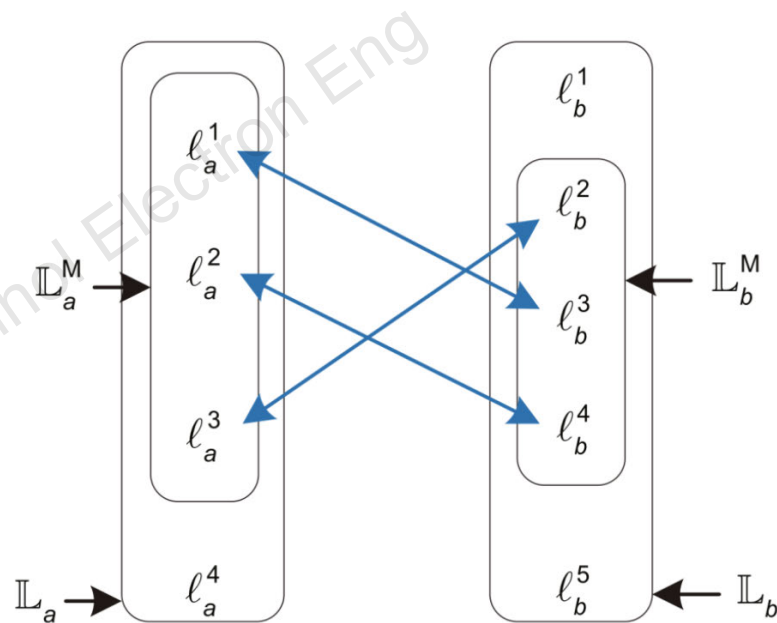


Fig. 4 A label matching example (References to color refer to the online version of this figure)

Results

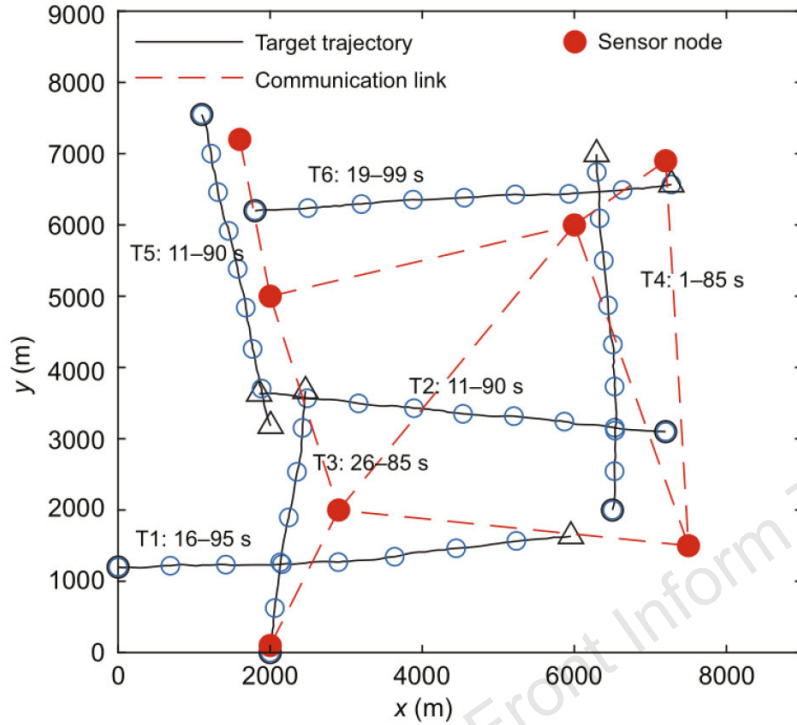


Fig. 5 A distributed network with seven bearings-only sensors and six targets, where black o denotes the initial position, black Δ denotes the end position, and blue o denotes the position of the target every 10 s after birth. References to color refer to the online version of this figure

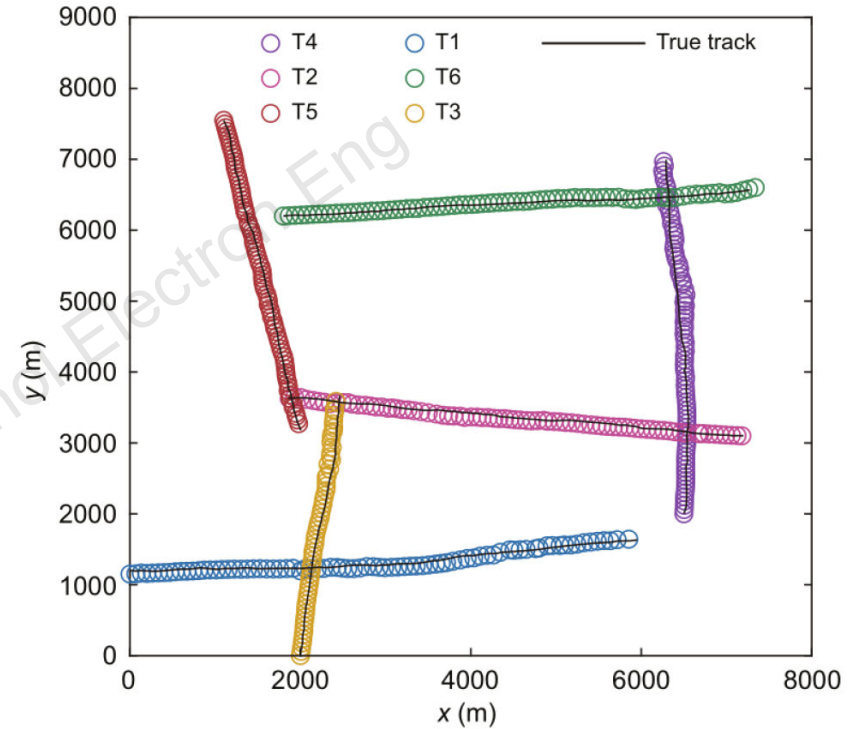


Fig. 6 Tracking results of AAF-AALM-K1 in one single run. References to color refer to the online version of this figure

Results

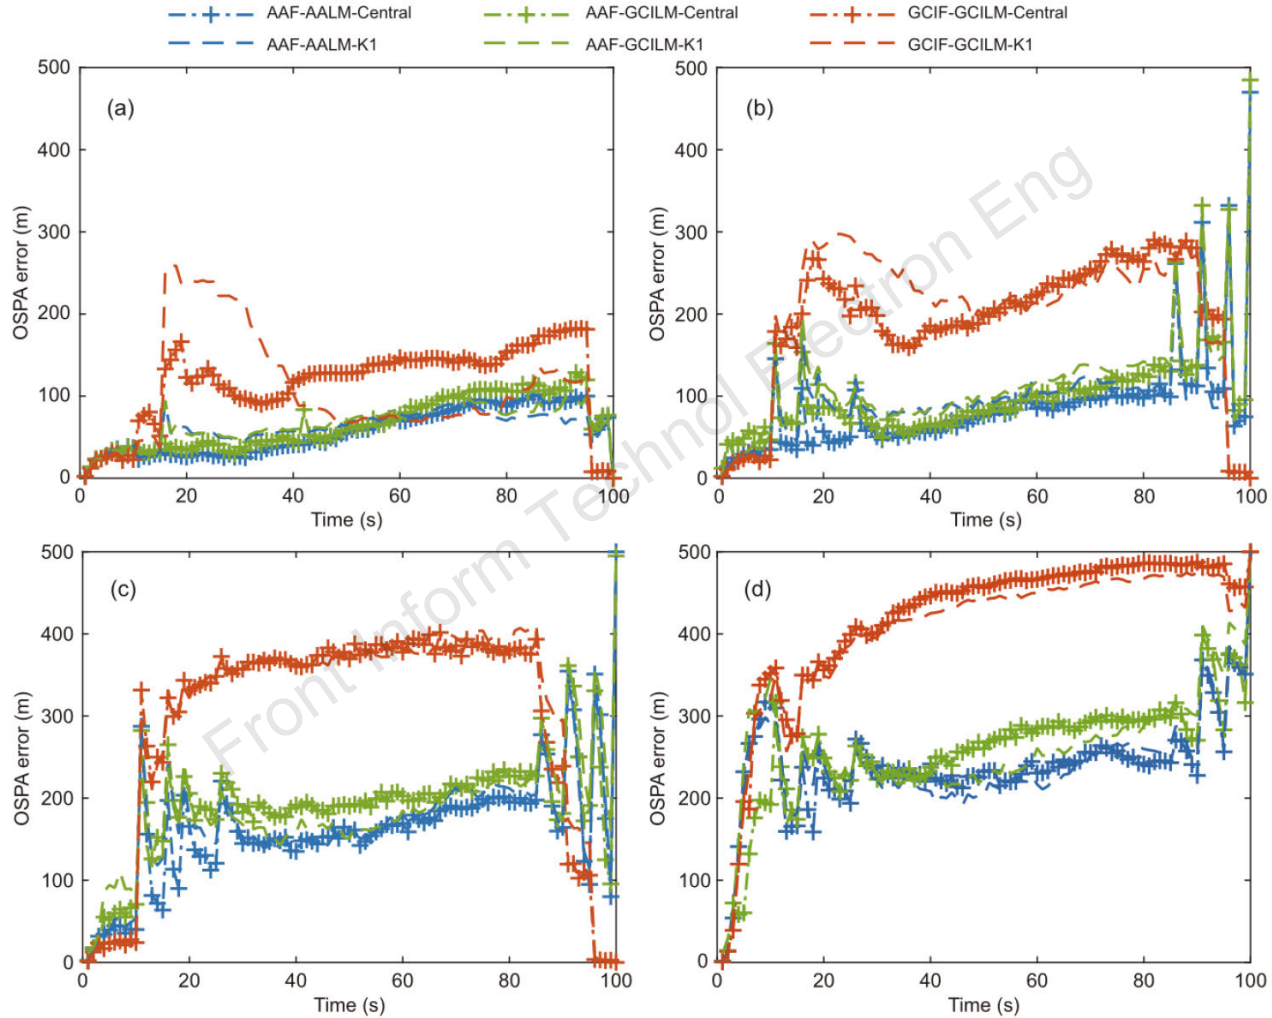


Fig. 7 OSPA errors under different detection probabilities: (a) 0.99; (b) 0.80; (c) 0.50; (d) 0.30

Results

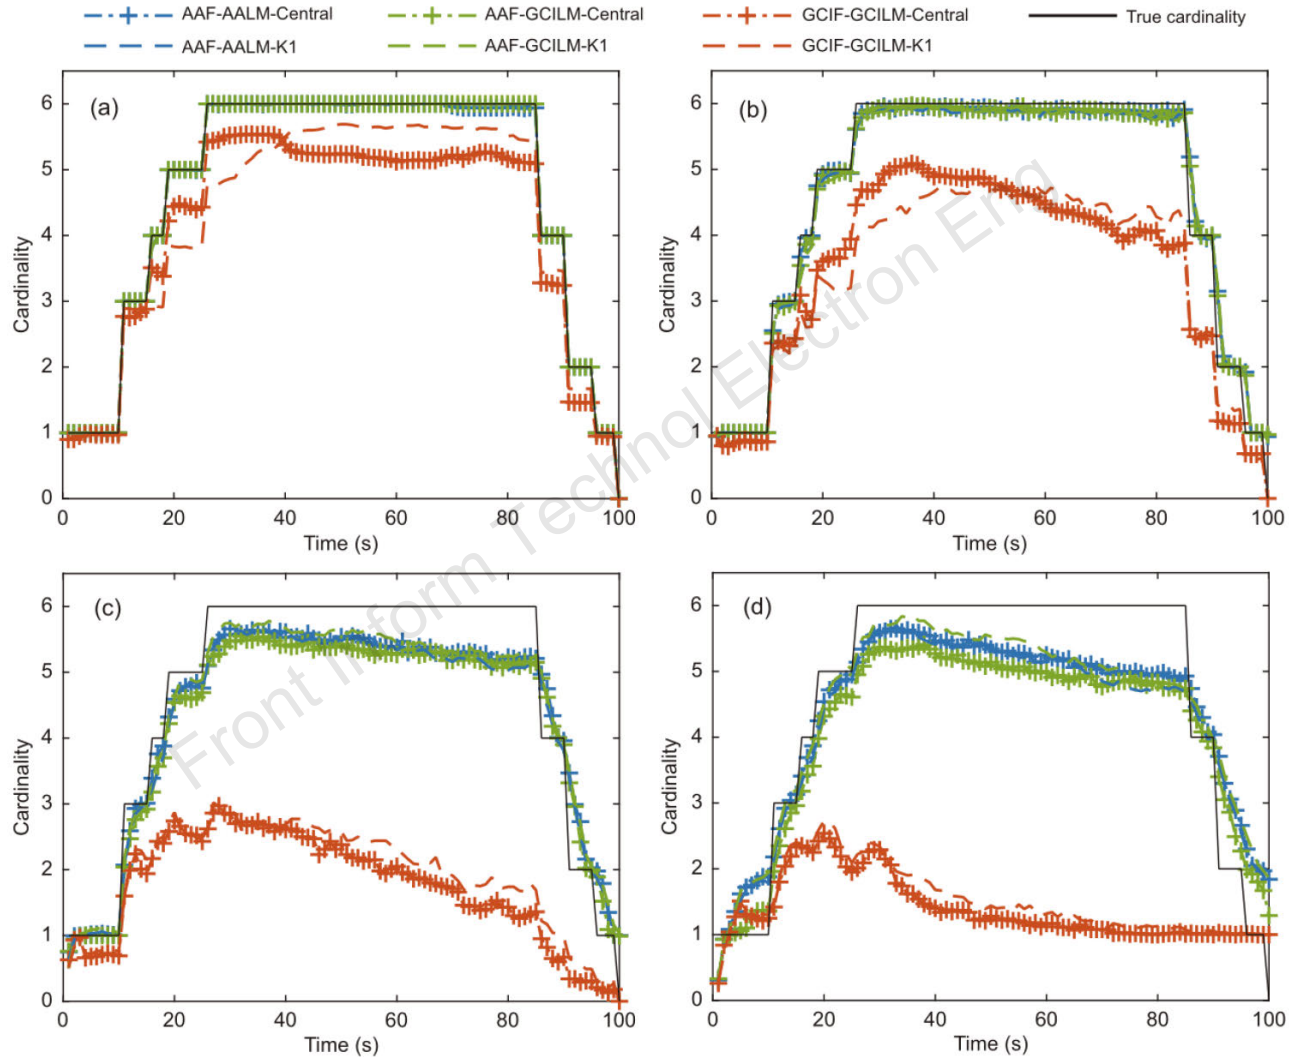


Fig. 8 Target cardinality under different detection probabilities: (a) 0.99; (b) 0.80; (c) 0.50; (d) 0.30

Conclusions

A distributed LMB filter with efficient label matching has been proposed in this paper. Considering the labels among local LMB densities that need to be consistent, this paper has proposed an efficient label matching method, called AALM. This AALM first establishes a cost function which evaluates the discrepancy among local posteriors and converts label matching into a linear assignment problem. The proposed label matching method is able to guarantee high performance even in low detection probability scenarios.



Changwen DING was born in 1995. He received his B.E. degree in automatic control from Harbin Institute of Technology, Weihai, China, in 2018. He is currently pursuing the Ph.D. degree in control science and engineering at Harbin Institute of Technology, Harbin, China. His research interests include nonlinear control, target tracking, and guidance and control of flight vehicles.



Chuntao SHAO was born in 1980. He received the M.E. and Ph.D. degrees in automatic control from Harbin Institute of Technology, Harbin, China, in 2005 and 2009, respectively. He is currently an associate professor with Harbin Institute of Technology. His research interests include aircraft control and guidance.




Siteng ZHOU was born in 2002. He is currently working toward the B.E. degree in automation with Harbin Institute of Technology, Harbin, China. His research interests include missile guidance, missile control, and multi-agent systems.



Di ZHOU was born in 1969. He received his B.E. and Ph.D. degrees in automatic control from Harbin Institute of Technology, Harbin, China, in 1991 and 1996, respectively. He is a professor with the School of Astronautics, Harbin Institute of Technology. His research interests include nonlinear control, nonlinear filtering, and guidance and control of flight vehicles.



Runle DU was born in 1975. She received the MS degree in engineering from Beijing Astronautic Institute of Long March Vehicle in 2008. Now she is a research fellow in National Key Laboratory of Science and Technology on Test Physics and Numerical Mathematics. Her research interests include navigation guidance and control, data fusion, and tracking on maneuvering targets.



Jiaqi LIU was born in 1963. He received the Ph.D. degree in circuit and systems from Beijing University of Aeronautics and Astronautics, Beijing, China. Currently he serves as a vice director and leading research fellow of National Key Laboratory of Science and Technology on Test Physics and Numerical Mathematics. His research interests include radar signal processing, target characteristic study, and target recognition.