

Learning distributed representations for community search using node embedding

Jinglian LIU, Daling WANG, Shi FENG, Yifei ZHANG,
Weiji ZHAO


Frontiers of Computer Science, DOI: [10.1007/s11704-018-7389-1](https://doi.org/10.1007/s11704-018-7389-1)

Problems & Ideas


- Problems of community search
 - Given a network G and a query node v which is already known to be in the target community, and the goal is to uncover the remaining nodes in the community.
- Ideas: introduce node embedding technique into community search, and propose a new perspective to address community search problem by utilizing node embedding techniques
 - Node embedding techniques which learn low-dimensional representations of nodes from network structure offer an alternative to traditional hand-engineered feature engineering.
 - We build a new Node Embedding Model based on Closest-Neighbor Biased random walk (NEMCNB for short) .
 - NEMCNB provides a new similarity measure between nodes in the network. Based on this, we give out a novel community search algorithm.

Main Contributions


- **NEMCNB performs better than the related community search algorithms on LFR benchmark networks and real-world networks.**

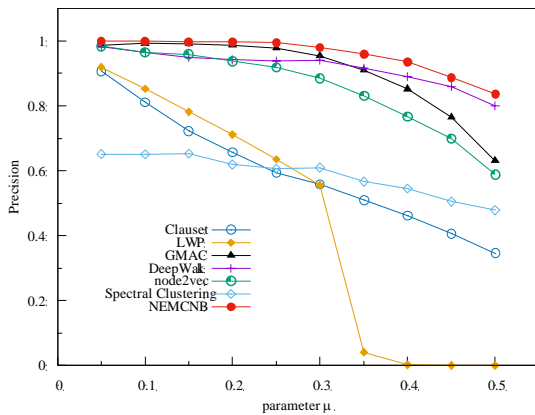

(a) Comparison result of precision

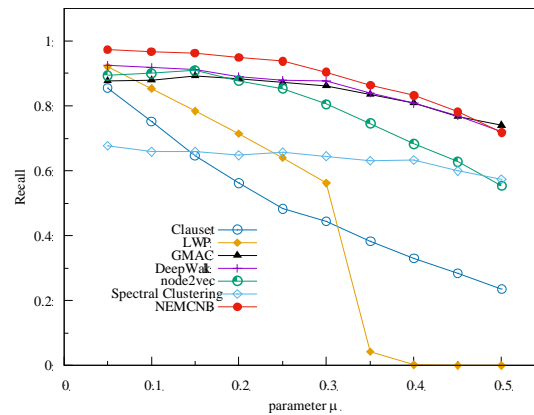


(b) Comparison result of recall

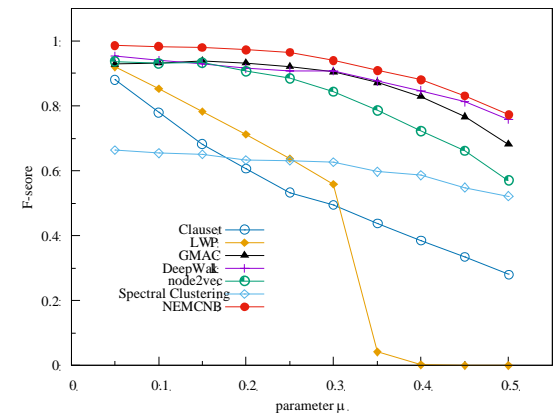


(c) Comparison result of F-score


Fig. 1: Comparison results on LFR benchmark networks

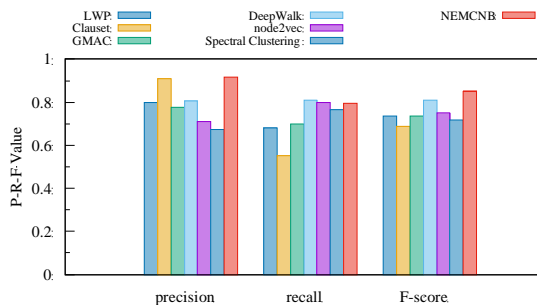

(a) Comparison result on Karate

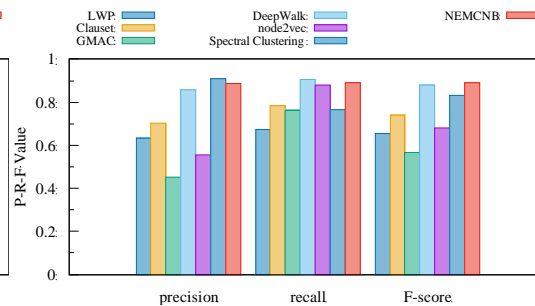

(b) Comparison result on Football

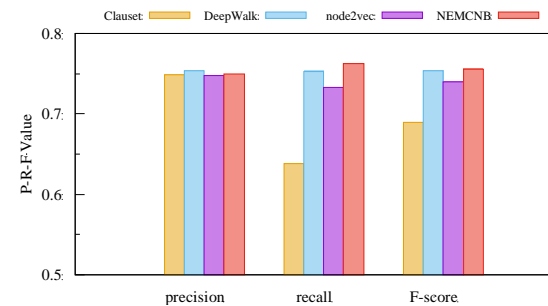

(c) Comparison result on DBLP

Fig. 2: Comparison results on real-world networks