

Xugang WU, Huijun WU, Ruibo WANG, Xu ZHOU, Kai LU, 2024. Towards adaptive graph neural networks via solving prior-data conflicts. *Frontiers of Information Technology & Electronic Engineering*, 25(3):369-383.

<https://doi.org/10.1631/FITEE.2300194>

Towards adaptive graph neural networks via solving prior-data conflicts

Key words: Graph neural networks; Heterophily; Prior-data conflict

Corresponding author: Kai LU

E-mail: lukainudt@163.com

 ORCID: <https://orcid.org/0000-0002-6378-7002>


Motivation

- There is a key prior in the design of most graph neural network (GNN) models, the homophily prior, which posits that nodes with similar features or labels of the same class are more likely to be connected in the graph. The homophily prior provides a strong regularization that prevents GNN models from overfitting when the amount of training data is limited.
- However, graphs in the real world can be heterophilic. The mismatch between the prior knowledge and the data characteristics leads to suboptimal GNN performance in heterophilic settings. In some cases, even a multilayer perceptron (MLP) model could outperform most existing GNNs.

Main idea

- To address the prior-data conflicts of GNNs in heterophilic settings, we incorporate a noninformative prior in the model by formulating the relationship between connected nodes.
- We adopt a scheme of mixture priors and implement a soft switch module to adjust the weight of the priors according to the characteristics of the graphs. Such a design allows the model to converge quickly to the proper prior.
- Combining these two designs, we propose the mixture-prior GNN (MPGNN) model and evaluate it on both synthetic and real-world benchmarks.

Framework

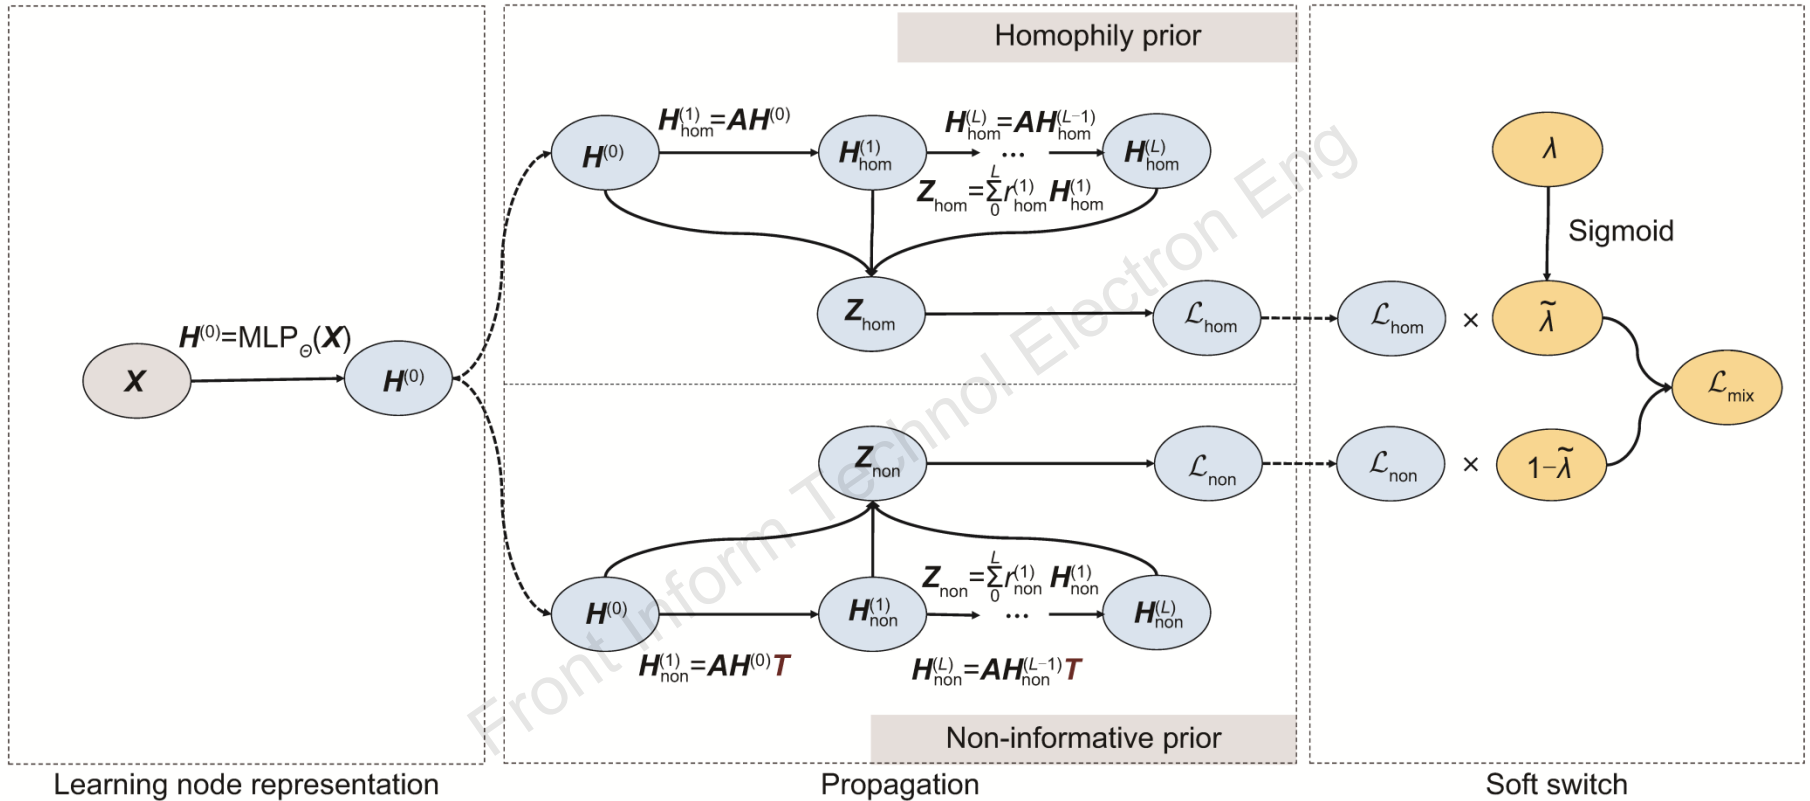


The overall framework of MPGNN. First, we use an MLP to obtain the representation of each node. After that, the node representations are propagated with two priors separately: homophily prior and non-informative prior. Finally, a soft switch is used to combine their results according to the characteristics of the graph.

Method

- Instead of following the homophily prior, we learn the inter-node relationships by formulating the transition probability as a latent variable T and integrating it into the propagation process.
- By optimizing the transition probability and the model parameters alternatively, MPGNN can capture the relationships between connected nodes in the graph, thus eliminating the prior-data conflict that is inherent in traditional GNNs in heterophilic settings.

Method

To avoid the performance drop when applying non-informative prior to homophilic graphs, we design a soft switch to select a suitable prior according to the graph characteristics adaptively.

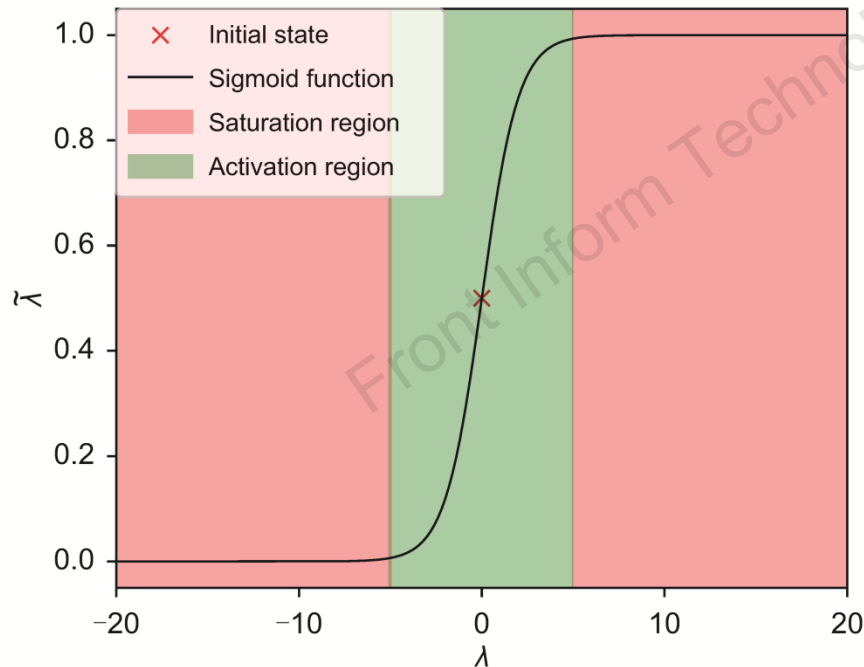

The sigmoid soft switch. In the early training stage, the soft switch lies in the activation region. When the soft switch turns into the saturation region, gradient vanishing happens and the soft switch stops learning.

Major results

Table 1 Results for cSBM under sparse splitting

Model	Accuracy (%)								
	$\phi = -1.00$	$\phi = -0.75$	$\phi = -0.50$	$\phi = -0.25$	$\phi = 0$	$\phi = 0.25$	$\phi = 0.50$	$\phi = 0.75$	$\phi = 1.00$
MPGNN	97.96±0.76	96.37±0.55	94.92±1.04	62.98±2.19	59.23±1.42	67.81±1.03	84.60±1.25	94.60±0.67	95.40±1.08
GPR-GNN	89.26±0.58	88.49±1.26	67.50±0.52	58.30±1.09	58.09±0.74	67.65±1.33	84.65±0.75	93.86±0.53	95.02±1.03
APPNP	49.60±0.21	51.52±0.26	56.08±0.31	59.10±0.49	60.34±1.07	68.01±1.57	85.65±1.52	94.24±0.48	92.82±0.63
MLP	50.03±0.94	53.13±0.48	56.28±0.62	59.25±0.49	62.03±0.74	60.48±0.59	57.81±0.37	53.23±0.21	50.31±0.28
GCN	55.88±0.50	62.54±0.75	56.32±0.44	52.33±0.51	54.38±0.32	67.03±0.35	84.38±0.20	93.34±1.53	83.64±0.58
GAT	53.44±0.32	57.70±0.51	53.19±0.39	51.55±0.35	53.36±0.63	63.38±0.15	81.03±0.35	88.65±0.41	82.08±0.33
JKNet	51.41±0.40	58.32±0.30	52.66±0.71	50.63±0.15	52.30±0.25	65.66±0.38	84.61±0.15	93.01±0.60	90.63±0.41


The highest accuracies are in bold

Conclusions

In this work, we demonstrate that the suboptimal performance of GNNs on heterophilic graphs is due to prior-data conflicts. We propose MPGNN, which solves such conflicts via (1) integrating a non-informative prior and (2) using a soft switch to balance the homophily prior and non-informative prior adaptively. With these two designs, MPGNN achieves state-of-the-art performance on both homophilic and heterophilic graphs.



Xugang WU received his BS degree in computer science and technology from National University of Defense Technology (NUDT), Changsha, in 2017. He is now pursuing his PhD degree in College of Computer, NUDT, Changsha. His research interests include AI security and explainable AI.

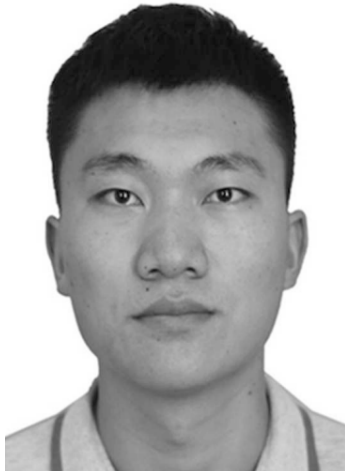

Huijun WU received his PhD degree in computer science and technology from the University of New South Wales, Sydney, in 2019. He is now an assistant professor in College of Computer, NUDT, Changsha. His research interests include the robustness and interpretability of machine learning models, and system software for high-performance computing.



Ruibo WANG is a full professor at NUDT. His research interests include high performance computing and operating systems.



Xu ZHOU received his BS, MS, and PhD degrees in computer science and technology from NUDT, Changsha, in 2007, 2009, and 2014, respectively. He is now an assistant professor in College of Computer, NUDT, Changsha. His research interests include operating systems and parallel computing.



Kai LU received his BS and PhD degrees in computer science and technology from NUDT, Changsha, in 1995 and 1999, respectively. He is now a professor in College of Computer, NUDT, Changsha. His research interests include operating systems, parallel computing, and software security.